



Product Features

- Universal input voltage : 110~305Vac;
- Constant power design, output current adjustable;
- Output current adjustable by built-in potentiometer;
- Surge protection: 5KV line-line, 10KV line-earth;
- Protections: Input OVP/Input UVP/SCP/ OTP;
- IP67 design for indoor and outdoor applications;
- Suitable for dry / damp / wet locations;
- 5 years warranty.

Application

- Suitable for LED roadway lighting, plant lighting, industrial lighting, landscape lighting, etc.

DESCRIPTION

The X6-105W series is 105W outdoor offline programmable LED driver that operates in constant current with high PF value and universal input voltage range 110~305Vac model. A wide range of output current in a single driver, which delivers maximum flexibility with customized operating settings and intelligent control options for lighting manufacturers, as one driver can be adjusted for many different luminaire designs. X6 also helps clients to improve the management of logistics and stock. The compact metal case and high efficiency enables the driver to operating with high reliability, and extending product lifetime. Overall protection is provided against lightening surge, input over voltage, input under voltage, short circuit, and over temperature, to ensure low failure rate.

MODELS

Model Number [1]	Max Output Power (W)	Output Voltage Range (Vdc)	Full Power Voltage Adjustable Range (V)	Full Power Current Adjustable Range (A) [2]	Default Output Current Setting(A)	Typical Efficiency [3]	Power Factor
							240Vac
X6-105Y062	105	38-62	42-62	1.69-2.50	2.10	91%	0.97

Notes:


[1]. Y can be M or V. Y=M means dimmable and constant current output;

Y=V means non-dimmable and output current adjusted by built-in potentiometer, 10%-100%Imax.

[2]. Output current adjustable range with constant power at max output power.

[3]. All specifications are measured at 25°C ambient temperature, input voltage 240Vac, and the typical value tested by full load, if no specific note.

OPERATING AREA I-V

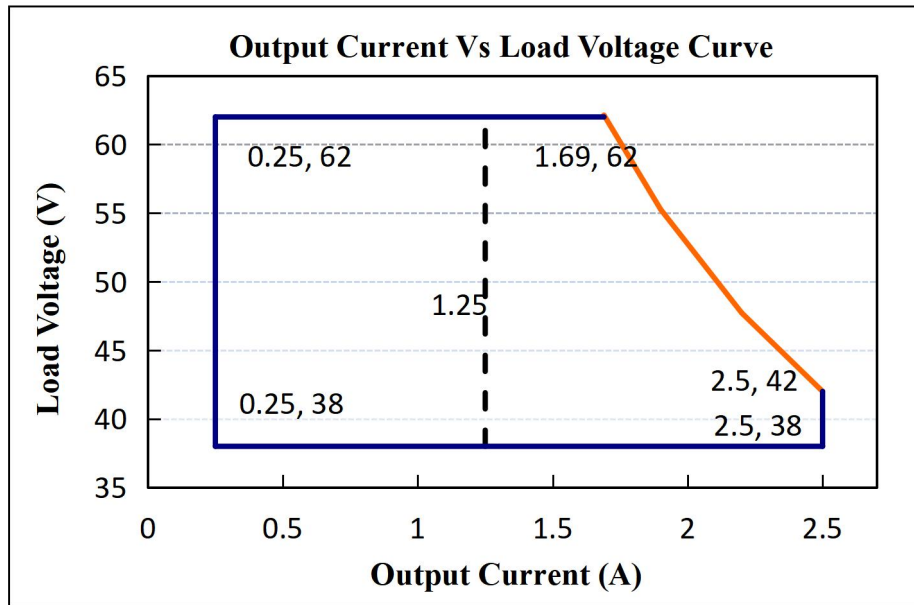

Notes: The drivers are not allowed to work in over-load condition, otherwise warranty will expire. Y=V is suitable for the right area of the dotted line; Y=M is suitable for the solid line contain area.

INPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes			
Input Voltage	110Vac	120-277Vac	305Vac	Rated Input Voltage is 240Vac			
Input Frequency	47Hz	50/60	63Hz				
Leakage Current	-	-	0.70mA	277Vac/60Hz			
Input AC Current	-	-	1.5A	120-277Vac & full load			
Inrush Current	-	-	75A	240Vac & full load			
Standby Power Consumption			2W				
Power Factor	0.97	0.99	-	120Vac, 50-60Hz, full load			
	0.95	0.97		240Vac, 50-60Hz, full load			
	0.92	0.95		277Vac, 50-60Hz, full load			
THD	-	5%	10%	120-240Vac, 50-60Hz, 50%-100% load			
	-	-	15%	277Vac, 50-60Hz, 70%-100% load			
Max. NO. of PSUs on CIRCUIT BREAKER	B10	3	B16	4	B25	7	230Vac
	C10	5	C16	7	C25	11	

OUTPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%Iset	-	5%Iset	
Output Current Setting Range (A) X6-105Y062	1.25	-	2.50	M model output current setting range 10-100% I _{max}
Output Current Setting Range with Full Power X6-105Y062	1.69	-	2.50	
Total Output Current Ripple(pk-pk)	-	5%	10%	20MHz BW, full load& LED load, the ripple would be tiny different under different LED load.
Startup Overshoot Current	-	-	10%	120~277Vac & 100% Load, load is LED
No Load Output Voltage X6-105Y062	-	-	70	
Line Regulation	-1%	-	1%	25°C±10°C ambient temperature, input voltage changes from 100Vac to 270Vac.
Load Regulation	-3%	-	3%	25°C±10°C ambient temperature, input Voltage 240Vac, load changes from 60% to 100%.
Turn-on Delay Time	-	1S	2S	120Vac, 100% load
	-	-	0.5S	240Vac, 100% load

GENERAL SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Efficiency @120Vac X6-105Y062 IO=1.69 IO=2.50	88% 88%	90% 90%		Measured at full load and 25°C ambient temperature
Efficiency @240Vac X6-105Y062 IO=1.69 IO=2.50	89% 89%	91% 91%	-	Measured at full load and 25°C ambient temperature
Efficiency @277Vac X6-105Y062 IO=1.69 IO=2.50	89% 89%	91% 91%		Measured at full load and 25°C ambient temperature
Dielectric Strength	Input-Output	-	3750Vac	Max 5mA/60S
	Input-PE	-	1600Vac	
	Output-PE	-	1600Vac	
Grounding Resistance	-	-	0.1Ω	25A/60S, under 25°C±10°C ambient temperature
Insulation Resistance	10MΩ	-	-	Input-Output, Input-PE, Output-PE, 500Vdc/60S/25°C/70% RH
MTBF	-	200000Hrs	-	25°C±10°C ambient temperature, 240Vac, 80% load (MIL-HDBK-217F)
Lifetime	-	50000Hrs	-	240Vac&100% load, 75°C case temperature, refer to lifetime curve for details
Ambient Temperature	-40°C		+60°C	240Vac&100% load

Operating Case Temperature for Safety Tc_s	-40℃	-	+90℃	
Operating Case Temperature for Warranty Tc_s	-40℃	-	+75℃	5 years warranty case temperature Humidity: 10% to 95% RH
Storage Temperature	-40℃	-	+85℃	Humidity: 5% to 100% RH
Dimensions (LxWxH)mm	L153.6*W68*H37			
Net Weight	700±100g/PCS			
Package	L488mm*W298mm*H200mm; 15PCS/Ctn, Gross Weight:12.2Kg			

DIMMING

Parameter	Min.	Typ.	Max.	Notes	
0~10V Absolute Maximum Voltage on the Vdim (+) Pin	-	10V	-		
0~10V Source Current on Vdim(+)Pin	-	200uA	400uA		
Dimming Output Range	X6-320M041	10%Imax	-	100%Imax	Imax=10.00A
	X6-320M041	1.00A	-	10.00A	
Recommended Dimming Range for 0-10V	0V	-	10V	Default 0-10V/ PWM Dimming(0-10V,0-9V,0-5V,0-3.3V Positive and Reverse Logic can be customized as request)	
PWM_in High Level	9.7V	-	10.3V		
PWM_in Low Level	0V	-	0.3V		
PWM_in Frequency Range	300Hz	-	2KHz		
PWM_in Duty Cycle	1%	-	99%		

SAFETY STANDARDS

Safety Category	Country / Territory	Standards	Approved
CCC	China	GB19510.1, GB19510.14	√
CE	Europe	EN61347-1, EN61347-2-13	√
		EN62493	√
ENEC		EN62384	√
CB	CB Countries	IEC61347-1, IEC61347-2-13	√
BIS	India	IS 15885(PART 2/SEC 13)	√
UL	USA	UL 8750	√
CUL	Canada	CSA C22.2 No.250.13	√
KC	South Korea	K61347-1, K61347-2-13	√
PSE	Japan	J61347-1, J61347-2-13	√
SAA	Australia	AS/NZS IEC 61347.2.13	√
		AS/NZS 61347.1	√
EAC	Russia	ГОСТ Р МЭК 61347-1-2011 ГОСТ IEC 61347-2-13-2013 ГОСТ IEC 62493-2014 СТБ EH 55015-2006 ГОСТ IEC 61547-2013	√

		ГОСТ 30804.3.2-2013 (IEC 61000-3-2:2009)	
		ГОСТ 30804.3.3-2013 (IEC 61000-3-3:2008)	

Insulation

Insulation	Input/Mains	DIMING	LED Output	Case
Input/Mains	/	Double	Double	Basic
DIMING	Double	/	Basic	Basic
LED Output	Double	Basic	/	Basic
Case	Basic	Basic	Basic	/


EMC COMPLIANCE

EMC Category	Country / Territory	Standards	Approved
CCC	China	GB/T 17743, GB 17625.1	√
CE	Europe	EN 55015	√
		EN 61000-3-2, EN 61000-3-3	√
		EN61000-4-2,3,4,5,6,11	√
		EN 61547	√


NOTE:

This LED driver meets the EMI specifications above, but as a component of a luminaire, end customer need to identify the EMI performance of a luminaire including LED driver, other devices connected to the driver and on the luminaire itself.


INRUSH CURRENT WAVEFORM

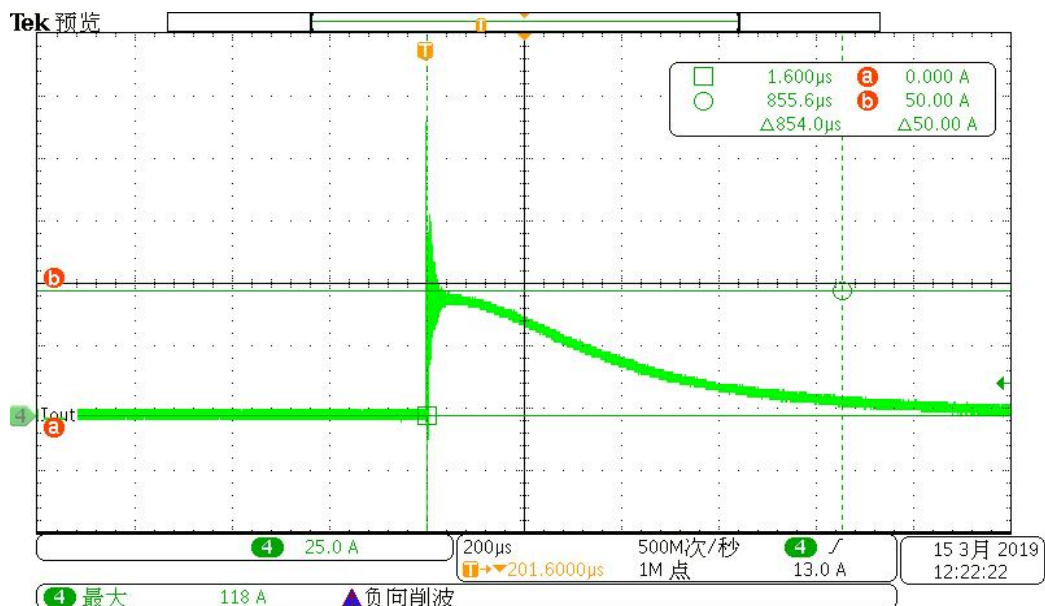


DERATING CURVE

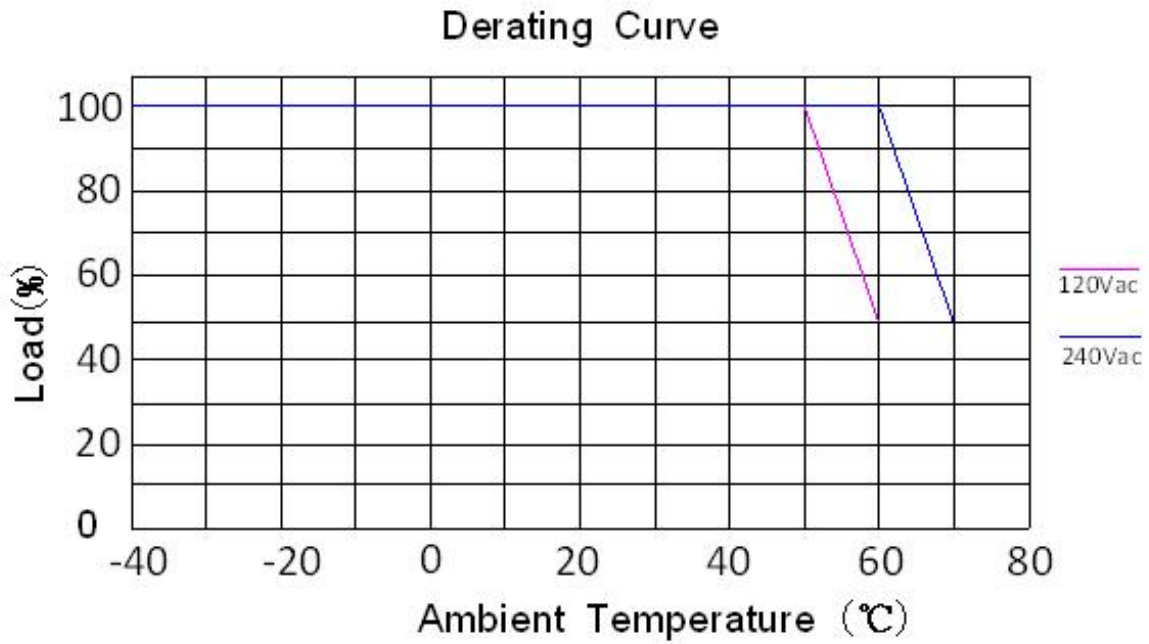


OUTPUT POWER VS INPUT VOLTAGE

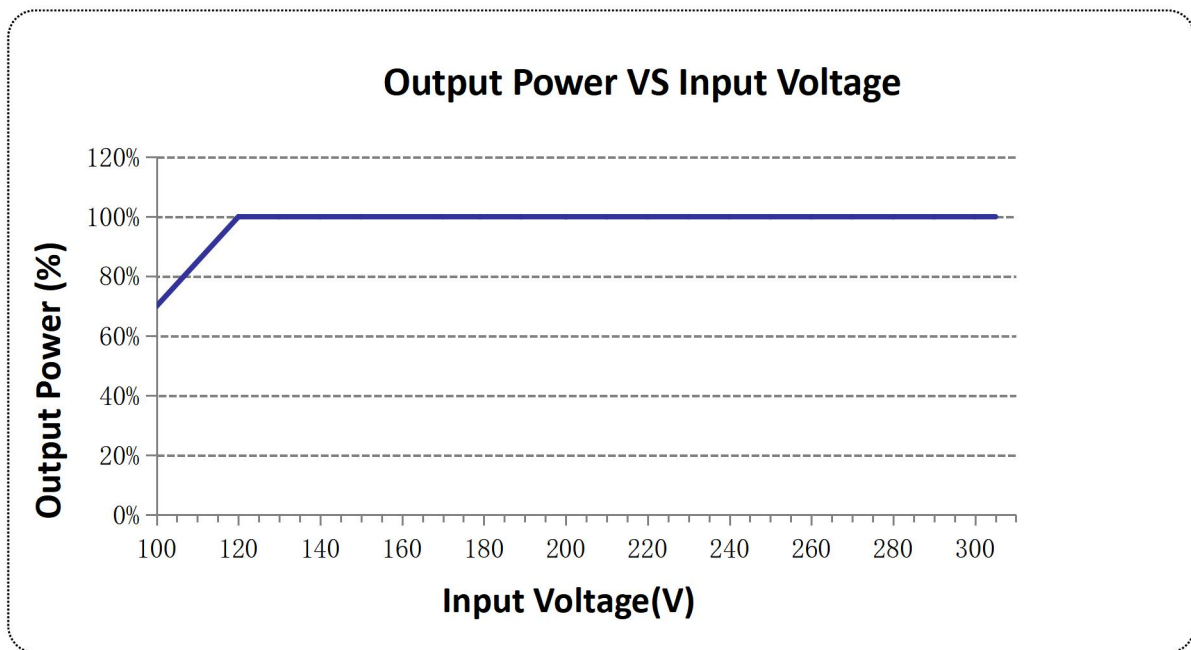


LIFETIME VS CASE TEMPERATURE

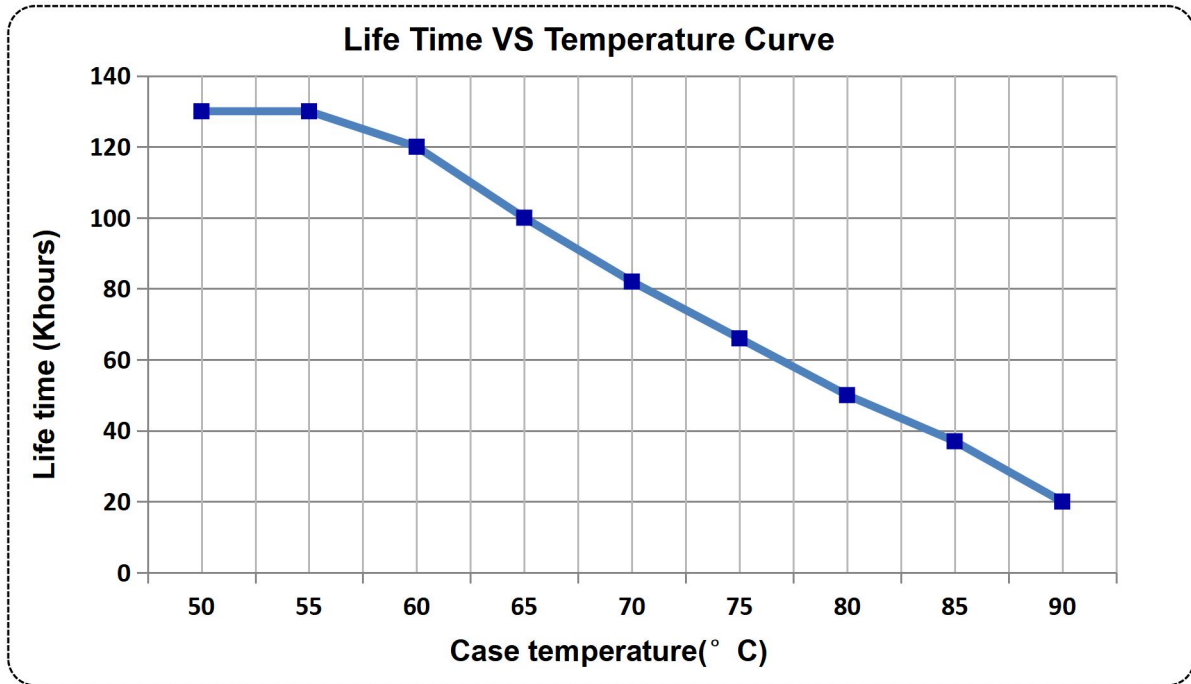


EFFICIENCY VS LOAD

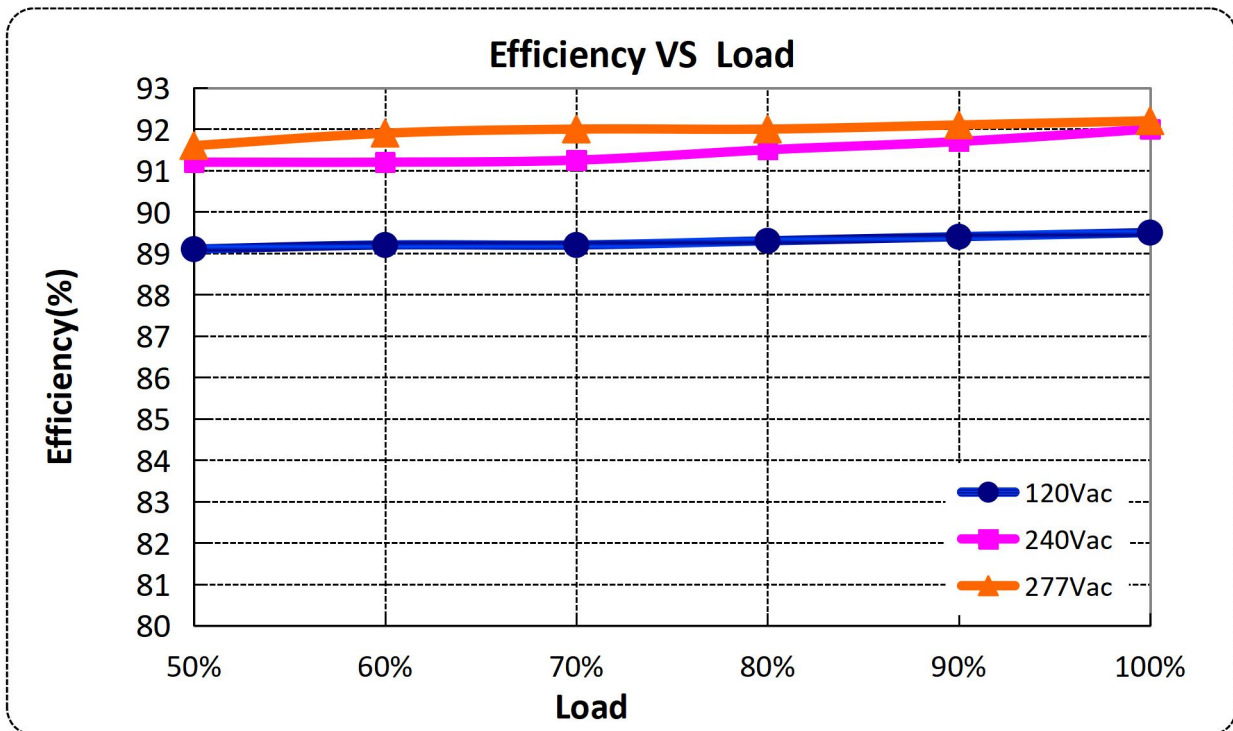

POWER FACTOR VS LOAD

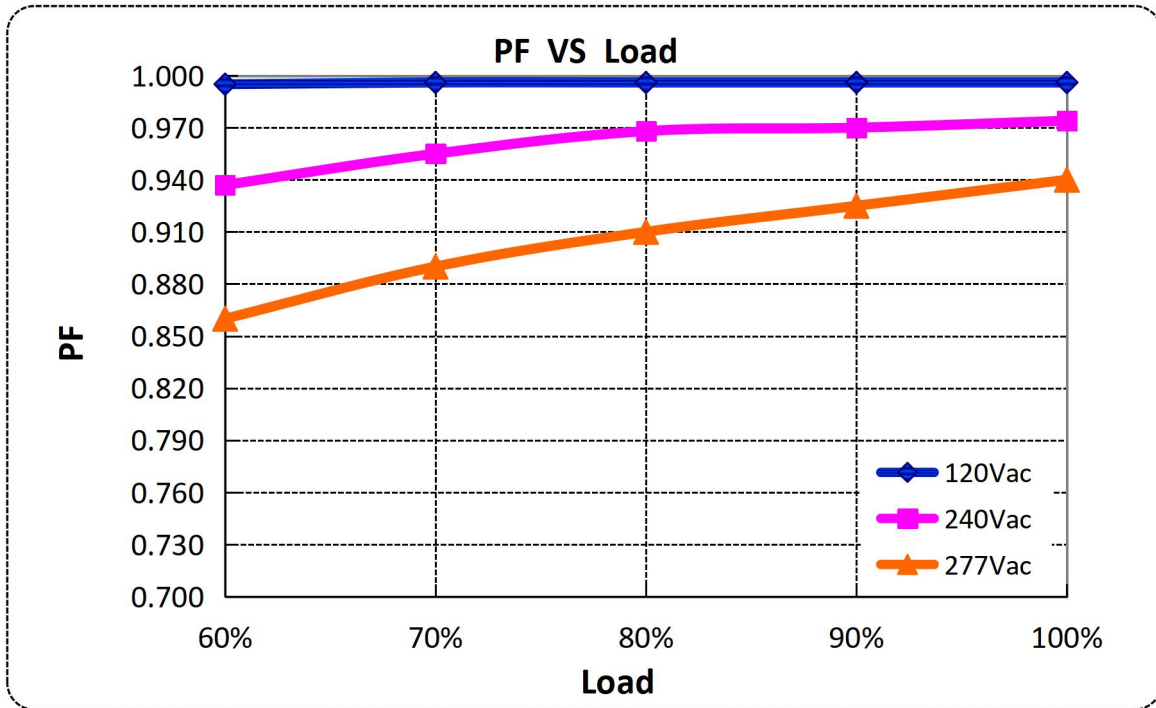

TOTAL HARMONIC DISTORTION

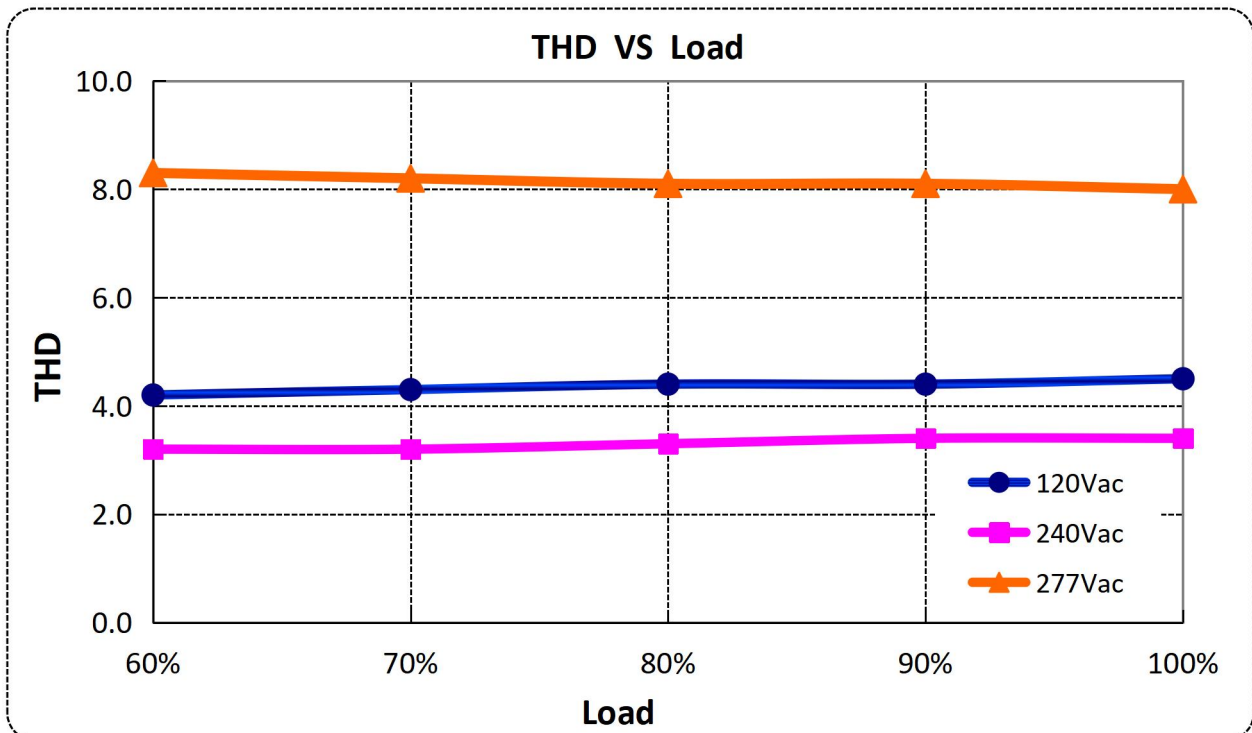


PROTECTIONS

Parameter		Min.	Typ.	Max.	Notes
Input Over Voltage Protection	Input Protection Voltage	325Vac	-	-	Turn off the output when the input voltage exceeds protection voltage.
	Recovery Voltage	300Vac	-	315Vac	Auto Recovery. The driver will restart when the input voltage falls below recovery voltage.
	Max. of Input Over Voltage	-	-	440Vac	The driver can survive for 48 hours with input over-voltage of 440Vac.
Input Under Voltage Protection		The driver Can Survive input Voltage Stress of 100V for 48 hours			
Over Temperature Protection		Decreases output current, returning to normal after over temperature is removed.			
Short Circuit Protection		Hiccup mode and auto recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.			
Output Over Voltage Protection		Limits output voltage at no load and in case the normal voltage limit fail			

0-10V/PWM DIMMING

0-10V/PWM Dimming Curve

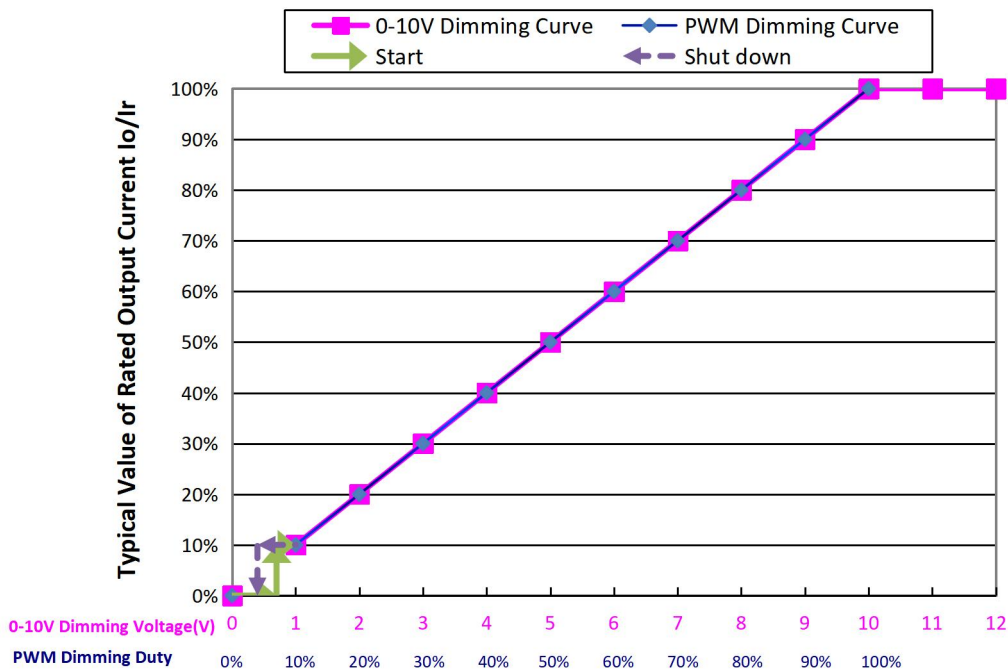


Note:


Dim to off model is realized by decreasing the output voltage, the power supply still has residual voltage when dim to off, so the start up voltage of the lamp should be higher than residual voltage.

MECHANICAL OUTLINE

X6-105M062 Types

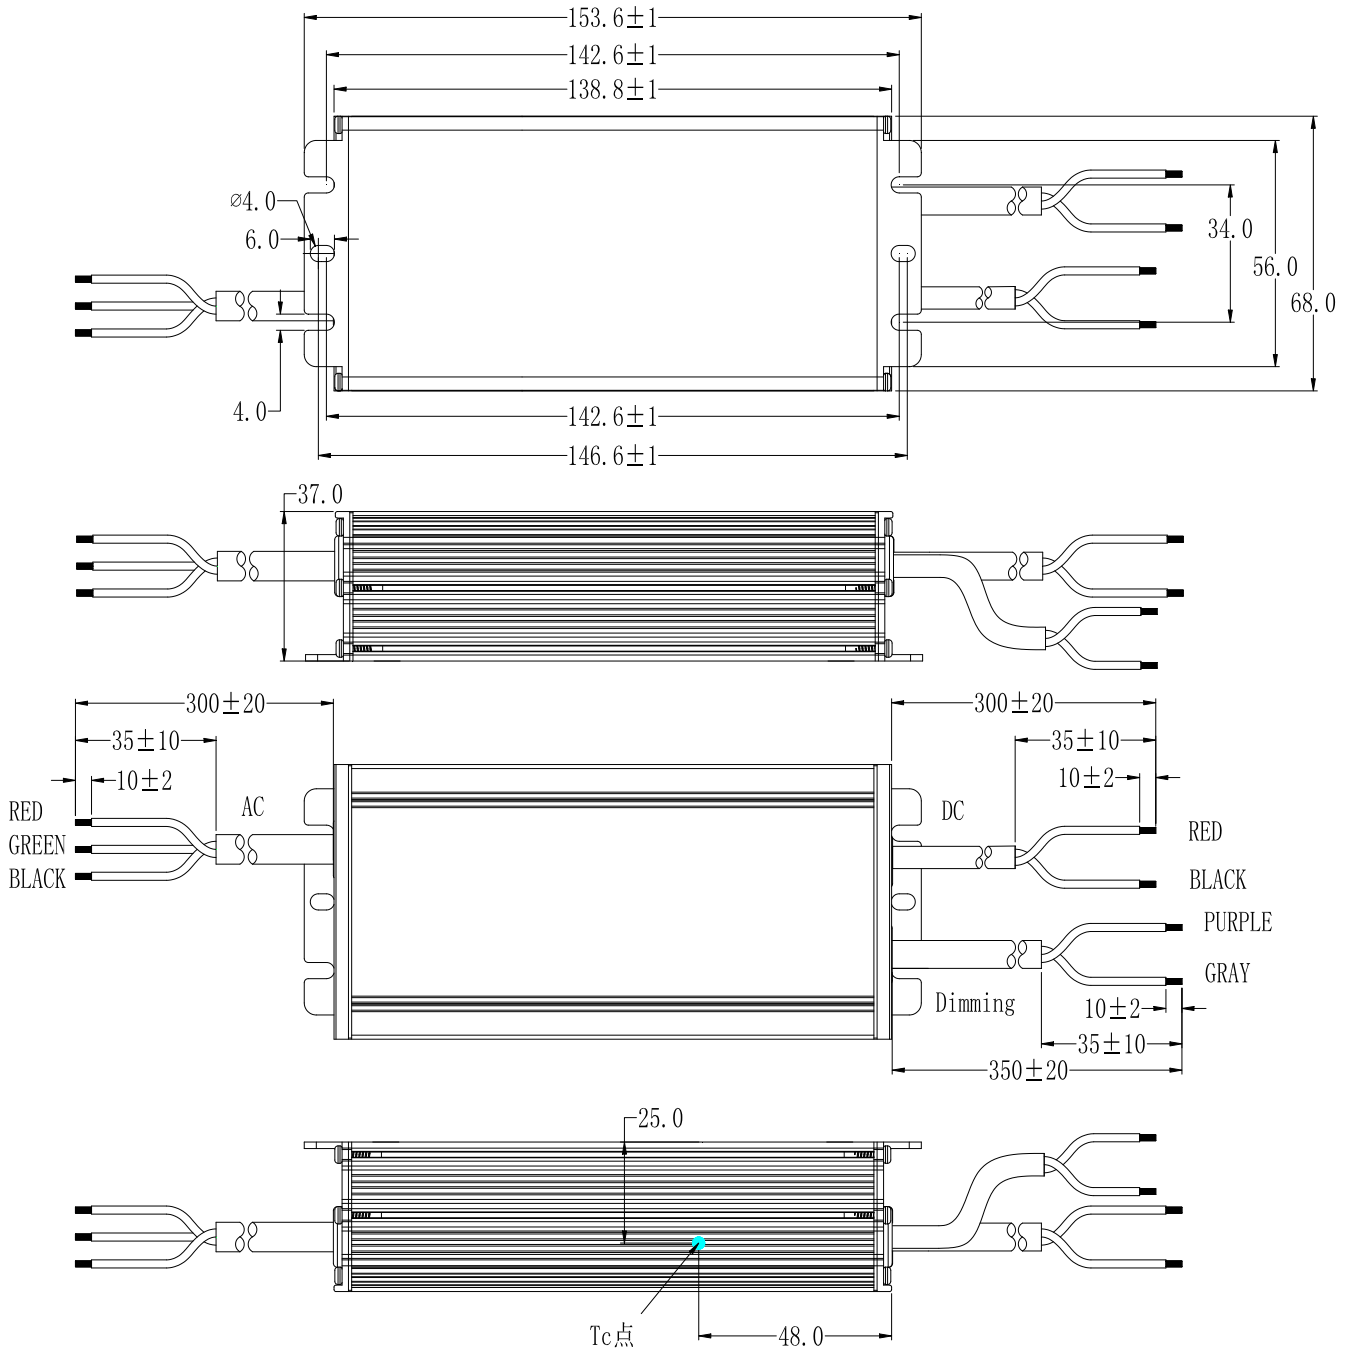

X6-105V062 Types

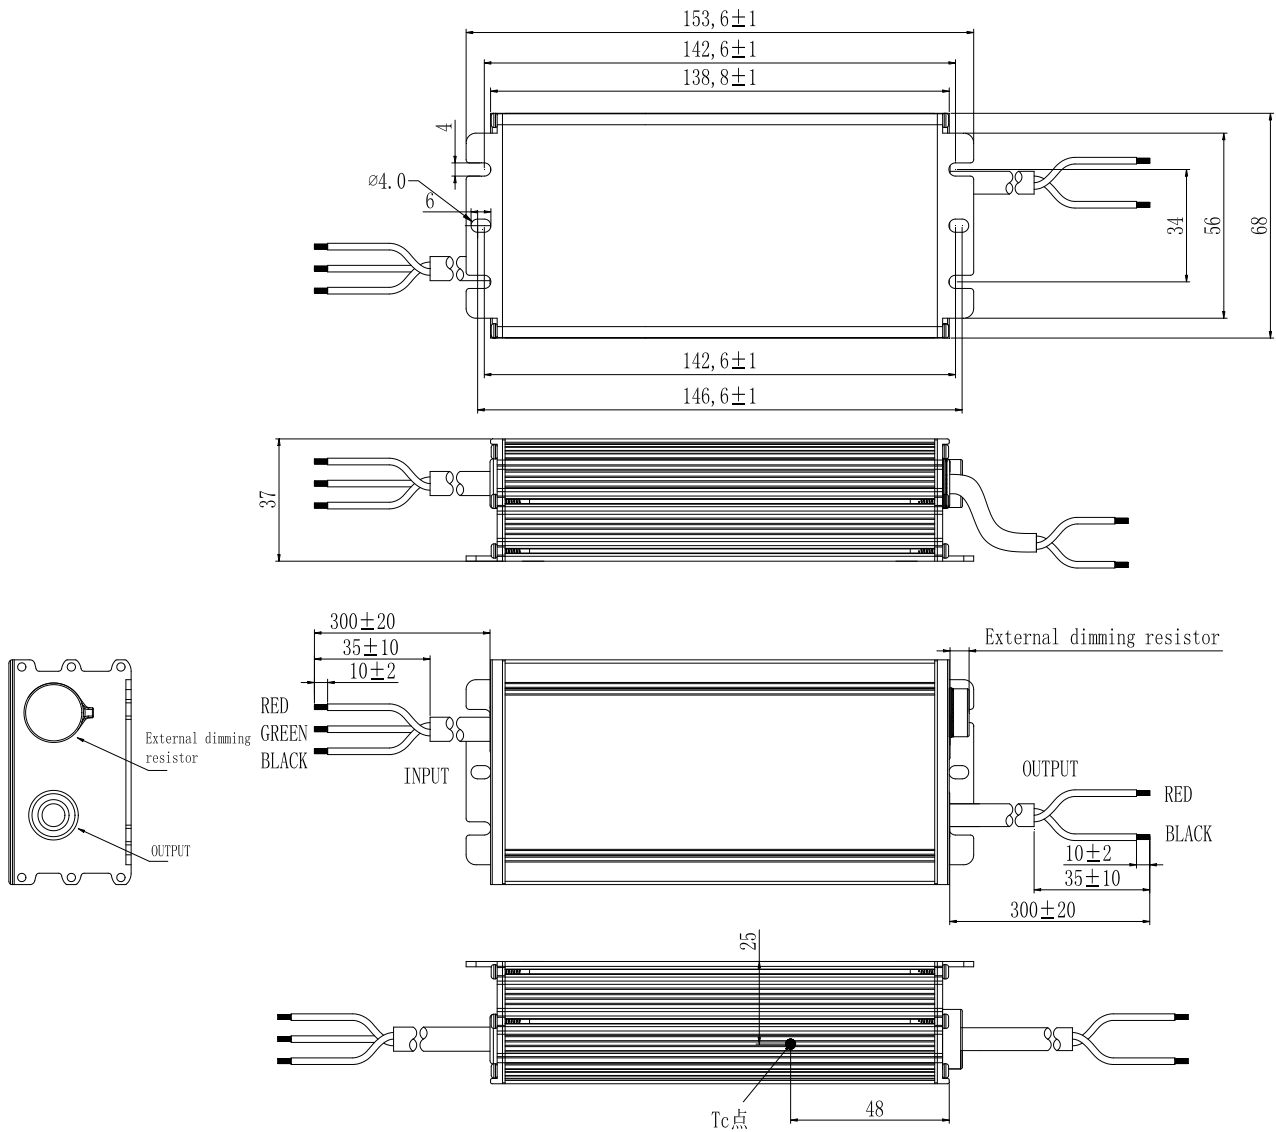

Wire	Specification	Note
Input	BIS-9968 3*1.0mm ² L=300±20mm	For BIS
Output	BIS-9968 2*1.0mm ² L=300±20mm	For BIS
Dimming	UL2733 22AWG*2C L=350±20mm	Y=M

LABEL

129.00 mm

45.50 mm

INPUT

L RED

G GREEN

N BLACK

MOSO[®] X6-105M062
LED DRIVER

INPUT	100-240V~ 50/60Hz, 1.5A Max.PF:0.95
OUTPUT	38-62V $\overline{=}$ 0.25-2.50A Max: 70V $\overline{=}$ Max.Power:105W
tc: 90 $^{\circ}$ C	ta: 50 $^{\circ}$ C Input:100-200V~ ta: 60 $^{\circ}$ C Input:200-240V~

MADE IN CHINA
For LED module only

SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD
No.1061, Songbai Road, Xili Town, Nanshan District,
Shenzhen, CHINA

IS15885(Part2/Sec13)

R-41077186
www.bis.gov.in

IP67

SELV

OUTPUT

RED Vo+

BLACK Vo-

PURPLE DIM+

GRAY DIM-

129.00 mm

45.50 mm

INPUT

L RED

G GREEN

N BLACK

MOSO[®] X6-105V062
LED DRIVER

INPUT	100-240V~ 50/60Hz, 1.5A Max.PF:0.95
OUTPUT	38-62V $\overline{=}$ 1.25-2.50A Max: 70V $\overline{=}$ Max.Power:105W
tc: 90 $^{\circ}$ C	ta: 50 $^{\circ}$ C Input:100-200V~ ta: 60 $^{\circ}$ C Input:200-240V~

MADE IN CHINA
For LED module only

SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD
No.1061, Songbai Road, Xili Town, Nanshan District,
Shenzhen, CHINA

IS15885(Part2/Sec13)

R-41077186
www.bis.gov.in

IP67

SELV

OUTPUT

Io ADJ (+)

RED Vo+

BLACK Vo-

Page 12 of 12

Specification subject to change without notice

www.mosopower.com Tel: +86-755-27657000

Email: info@mosopower.com

Form No.: FP-10-017RevA/1.0

Specification for Approval

Product Name: 105W Outdoor Off-line Programmable Driver

Product Model: X6-105M062-I BIS
X6-105V062-I BIS

Rev. B.2

Sample Date: -

CUSTOMER AUTHORIZED SIGNATURE		
Tested By	Checked By	Approved By
(Company seal)Return one copy to MOSO with approved signature and company seal.		

XiLi Songbai Road 1061, Nanshan
Address: District, Shenzhen City, Guangdong Province, P.R.China Post Code: 518108
TEL: 0755-27657000 FAX: 0755-27657908
E-mail: info@mosopower.com Web site: http://www.mosopower.com

Prepared By	Checked By	Approved By

Specification subject to change without notice

