

### Product Features



- Universal input voltage / Full range: 90~305Vac;
- Constant power design, output current programming adjustable;
- offline programmable
- 3-in-1 dimmable: 0~10Vdc, PWM, Timer dimming. Dim-to-off;
- Constant lumen output;
- Output and Dimming Signal Isolating;
- Surge protection: 6KV line-line, 10KV line-earth;
- Protections: SCP, OVP, OTP;
- IP67 design for indoor and outdoor applications;
- Suitable for dry / damp / wet locations;
- 7 years warranty.



### Application

- Suitable for LED roadway lighting, plant lighting, industrial lighting, landscape lighting, etc.

### DESCRIPTION

The X6-480W series is 480W outdoor offline programmable LED driver that operates in constant current with high PF value and universal input voltage range 90~305Vac model. Offline Monitored by dimming cable connected with an USB kit programming device, the fully programmed drivers offer all dimming, dim-to-off, constant lumen output options and a wide range of output current in a single driver, which deliver maximum flexibility with customized operating settings and intelligent control options for lighting manufacturers, as one driver can be programmed for many different luminaire designs. X6 provides built-in timer dimming schedules further increasing the energy savings and CO<sub>2</sub> reductions achieved with LED lighting. It also helps clients to improve the management of logistics and stock. The compact metal case and high efficiency enables the driver to operating with high reliability, and extending product lifetime. Overall protection is provided against lightening surge, output over voltage, short circuit, and over temperature, to ensure low failure rate.

### MODELS


Model Number [1]	Max Output Power(W)	Output Voltage Range(Vdc)	Full Power Output Voltage Range (Vdc)	Full Power Current Adjustable Range (A)	Default Output Current Setting(A)	Typical Efficiency [2]	PF
X6-480M060A12	480	30-60	48-60	8-10	8.2	93.5%	0.95

### Notes:

[1]. All specifications are measured at 25°C ambient temperature, input voltage 230Vac, and the typical value tested by full load, if no specific note.

**OPERATING AREA I-V**

X6-480M060A12

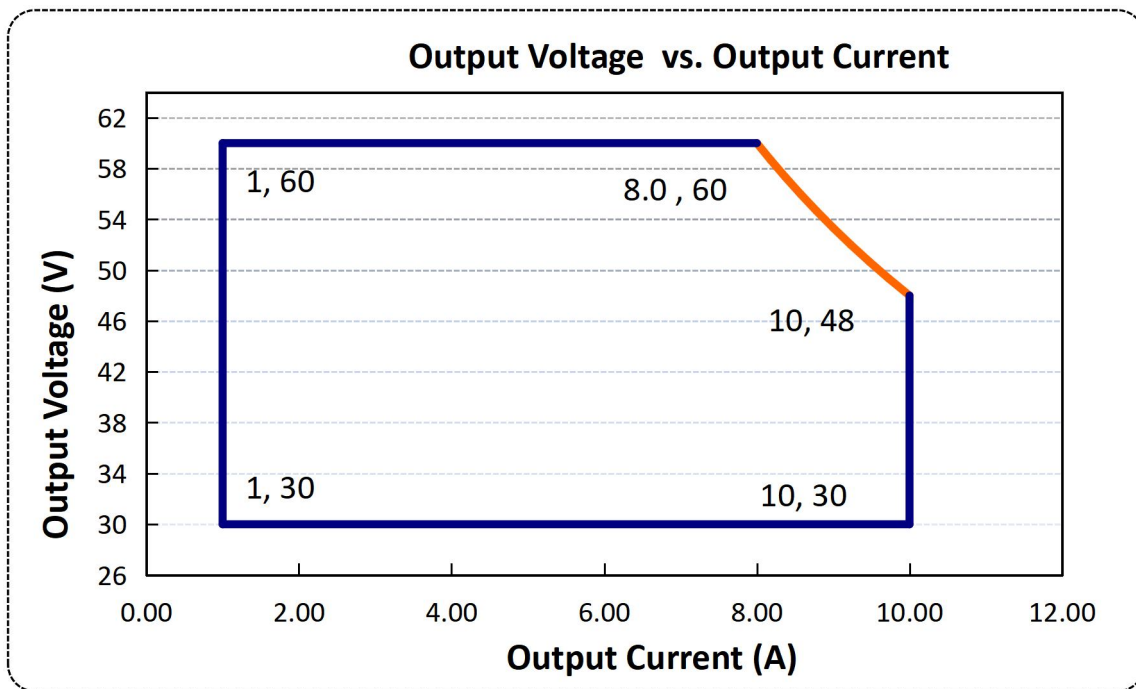

**INPUT SPECIFICATIONS**

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90Vac	120-277 Vac	305Vac	
Input Frequency	47Hz	50/60	63Hz	
Leakage Current	-	-	0.75mA	277Vac/60Hz
Input AC Current	-	-	6A	100 Vac &full load
Inrush Current	-	-	50A	230Vac & full load
Power Factor	0.98	-	-	120Vac, 60Hz,80%-100%oad
	0.95	-	-	230Vac, 50Hz, 80%-100%load
	0.9	-	-	277Vac, 50Hz, 80%-100% load
THD	-	10%	15%	100-240Vac,50-60Hz, 80%-100% load
	-	-	20%	277Vac, 50-60Hz, 80%-100% load

## OUTPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%	-	5%	
Output Current Setting Range (A)	1	-	10	The 'M type' adjustable lout range: 10%-100% I <sub>max</sub>
Output Current Setting Range with Constant Power (A)	-	8.2	10	
Total Output Current Ripple(pk-pk)	-	3%	5%	20MHz BW, full load& LED load, the ripple would be tiny different under different LED load.
Startup Overshoot Current	-	-	10%	100~277Vac &100% Load, load is LED
No Load Output Voltage (V) X6-480M060A12	-	-	70	
Line Regulation	-3%	-	3%	25°C±10°C ambient temperature, input voltage changes from 100Vac to277Vac.
Load Regulation	-3%	-	3%	25°C±10°C ambient temperature, Input Voltage 230Vac, load changes from 60% to 100%.
Standby power supply V <sub>o</sub> (V)	-	12	-	
Standby power supply load regulation (%)	-5	-	5	
Standby power supply I <sub>o</sub> (mA)		200	300	
Turn-on Delay Time	-	-	3S	120Vac, 100% load
	-	-	0.5S	230Vac, 100% load

**GENERAL SPECIFICATIONS**

Parameter		Min.	Typ.	Max.	Remark
Efficiency @120Vac V <sub>o</sub> =60V I <sub>o</sub> =8A		89%	91%	-	Measured at full load and 25°C ambient temperature
Efficiency @230Vac V <sub>o</sub> =60V I <sub>o</sub> =8A		92%	93.5%	-	Measured at full load and 25°C ambient temperature
Efficiency @277Vac V <sub>o</sub> =60V I <sub>o</sub> =8A		92%	94%	-	Measured at full load and 25°C ambient temperature
Dielectric Strength	Input-Output	-	3750Vac	-	Max 5mA/60S
	Input-PE	-	1600Vac	-	
	Output-PE	-	1600Vac	-	
Grounding Resistance		-	-	0.1Ω	25A/60S, under 25°C±10°C ambient temperature
Insulation Resistance		10MΩ	-	-	Input-Output, Input-PE, Output-PE, 500Vdc/60S/25°C/70%RH
MTBF		-	200000Hrs	-	25°C±10°C ambient temperature, 230Vac, 80% load (MIL-HDBK-217F)
Lifetime		-	50000Hrs	-	230Vac&100% load, 75°C case temperature, refer to lifetime curve for details
Ambient Temperature		-40°C		+45°C	230Vac&100% load
Operating Case Temperature for Safety Tc <sub>s</sub>		-40°C	-	+90°C	
Operating Case Temperature for Warranty Tc <sub>s</sub>		-40°C	-	+75°C	7 years warranty case temperature Humidity: 10% to 95% RH
Storage Temperature		-40°C	-	+85°C	Humidity: 5% to 100% RH
Dimensions (LxWxH)mm		L276*W125*H39.5mm;			
Net Weight		2650±200g/PCS			
Package		L495Xw390xH170mm 6PCS/Ctn			

### DIMMING

Parameter	Min.	Typ.	Max.	Notes
0~10V Absolute Maximum Voltage on the Vdim (+) Pin	-	10V	10.3	
0~10V Source Current on Vdim(+)Pin	-	0.2mA	0.4mA	
Dimming Output Range	10% I <sub>max</sub>	-	100% I <sub>max</sub>	I <sub>max</sub> =10A
Recommended Dimming Range for 0-10V	0V	-	10V	Default 0-10V/ PWM Dimming
PWM_in High Level	9.7V	-	10.3V	
PWM_in Low Level	0V	-	0.3V	
PWM_in Frequency Range	300Hz		2KHz	
PWM_in Duty Cycle	1%	-	99%	

### SAFETY STANDARDS

Safety Category	Country / Territory	Standards	Approved
CCC	China	GB19510.1, GB19510.14	√
CE	Europe	EN61347-1, EN61347-2-13	√
		EN62493	√
ENEC		EN62384	√
CB	CB Countries	IEC61347-1, IEC61347-2-13	√
BIS	India	IS 15885(PART 2/SEC 13)	
UL	USA	UL 8750	√
CUL	Canada	CSA C22.2 No.250.13	√


### EMC COMPLIANCE

EMC Category	Country / Territory	Standards	Approved
CCC	China	GB/T 17743, GB 17625.1	√
CE	Europe	EN 55015	√
		EN 61000-3-2, EN 61000-3-3	√
		EN61000-4-2,3,4,5,6,11	√
		EN 61547	√
KC	South Korea	K61547	
		K00015	
PSE	Japan	J55015	
FCC	USA	FCC part 15	√


#### NOTE:

This LED driver meets the EMI specifications above, but as a component of a luminaire, end customer need to identify the EMI performance of a luminaire including LED driver, other devices connected to the driver and on the luminaire itself.


**DERATING CURVE**

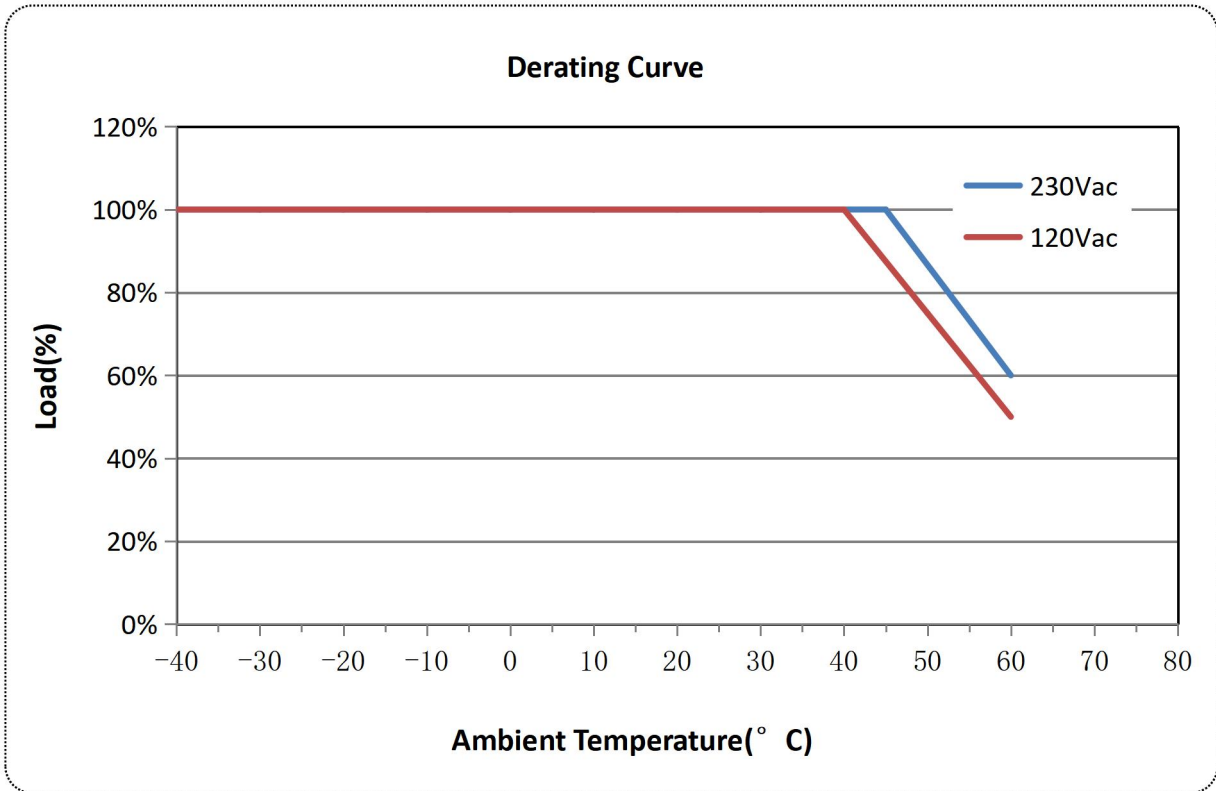


**OUTPUT POWER VS INPUT VOLTAGE**

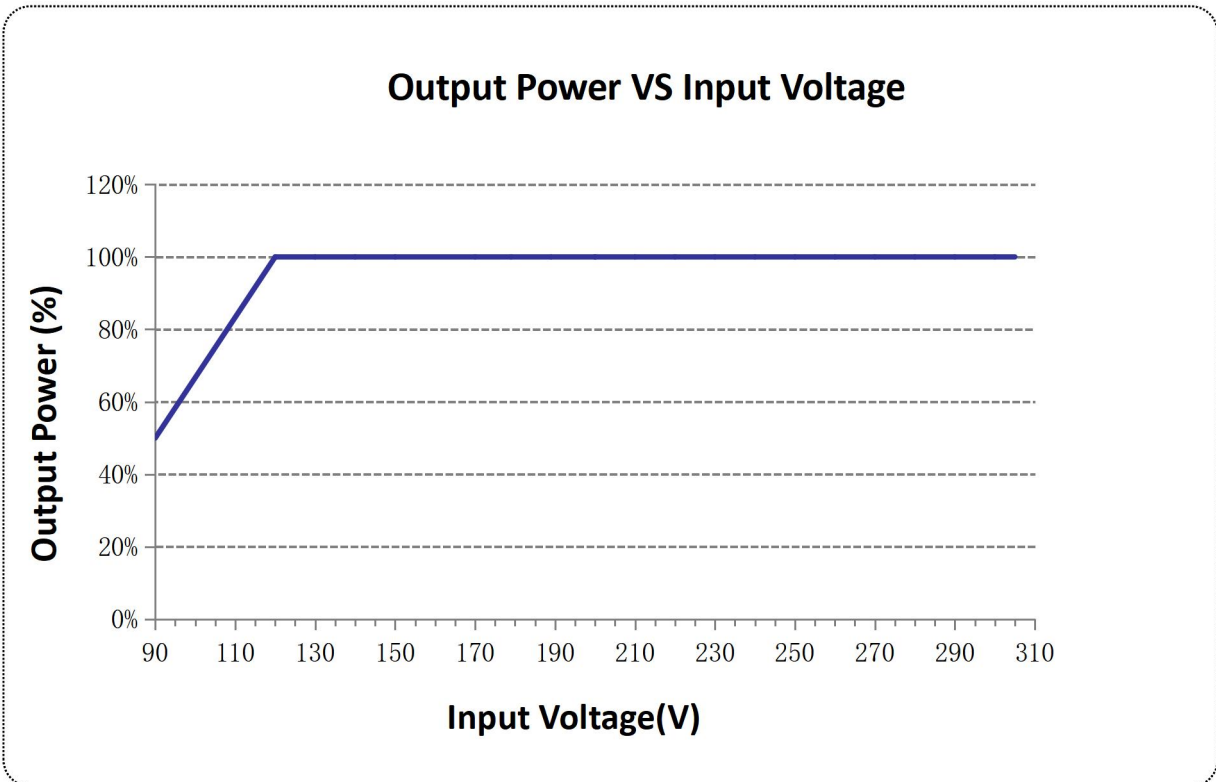


**LIFETIME VS CASE TEMPERATURE**

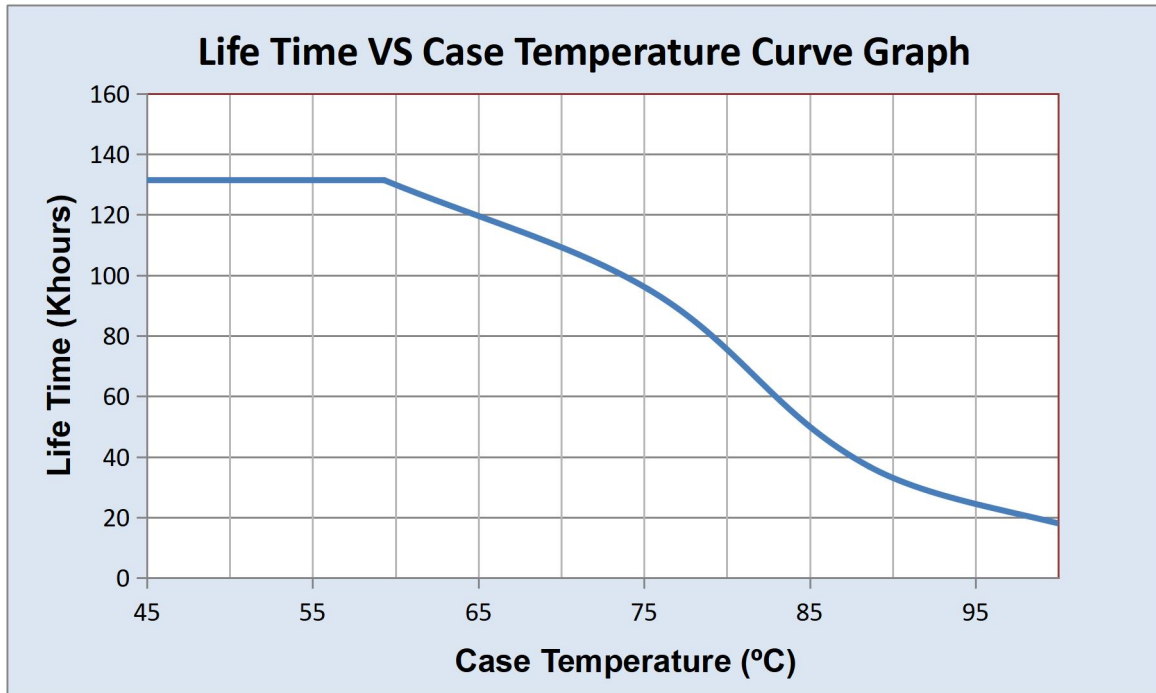


**EFFICIENCY VS LOAD**

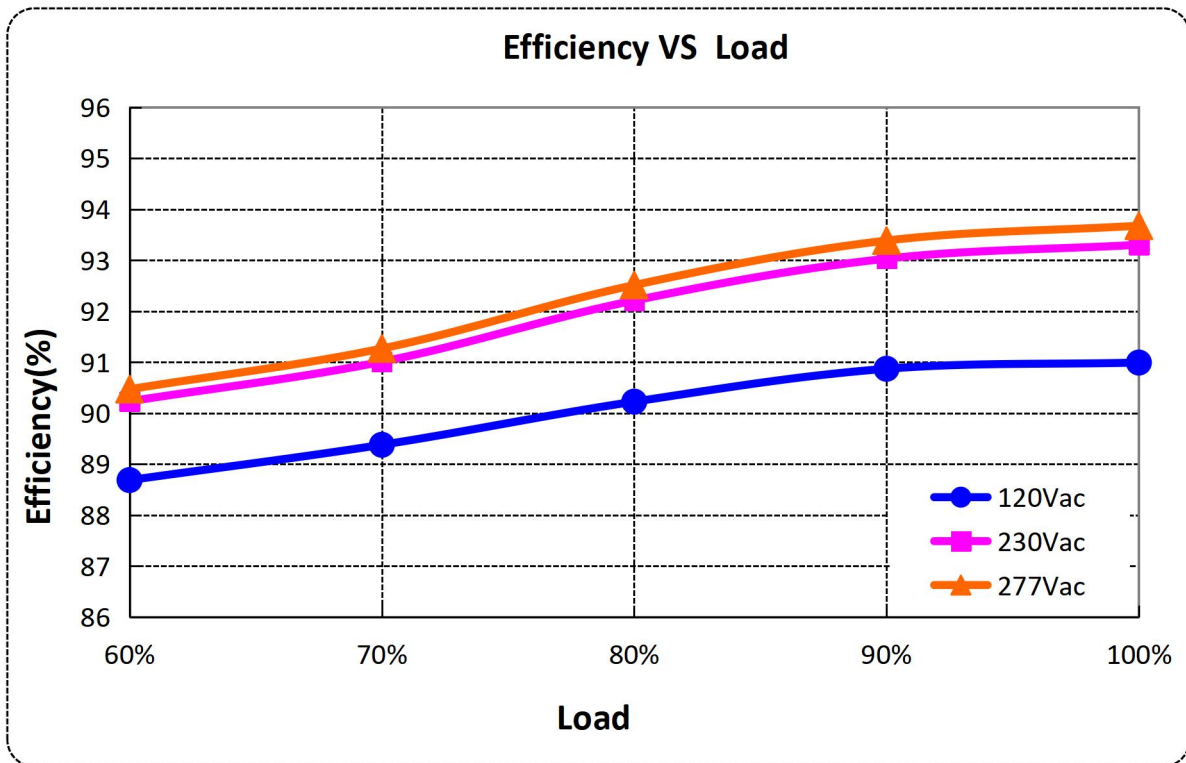

**POWER FACTOR VS LOAD**

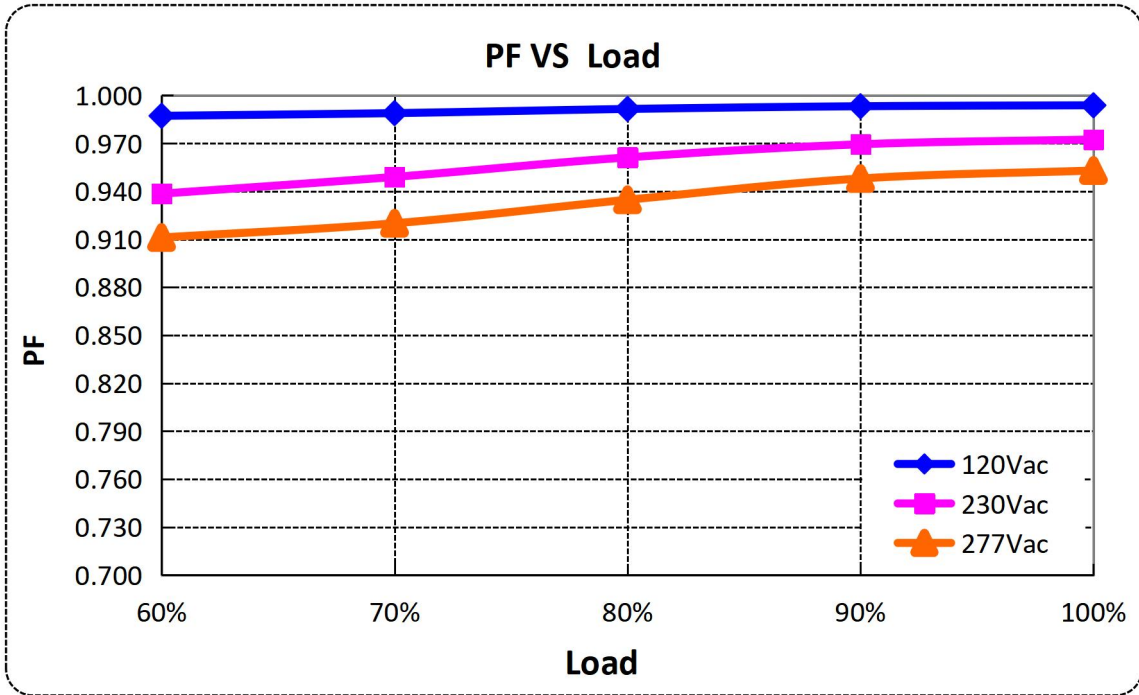


**TOTAL HARMONIC DISTORTION**

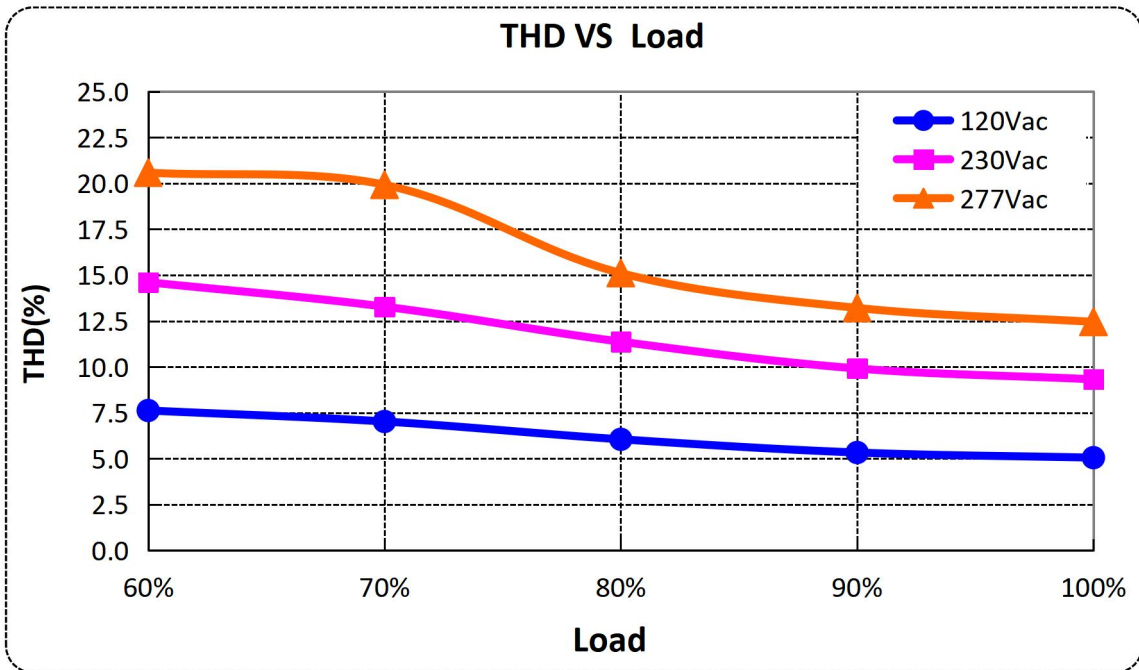




**0-10V/PWM DIMMING**

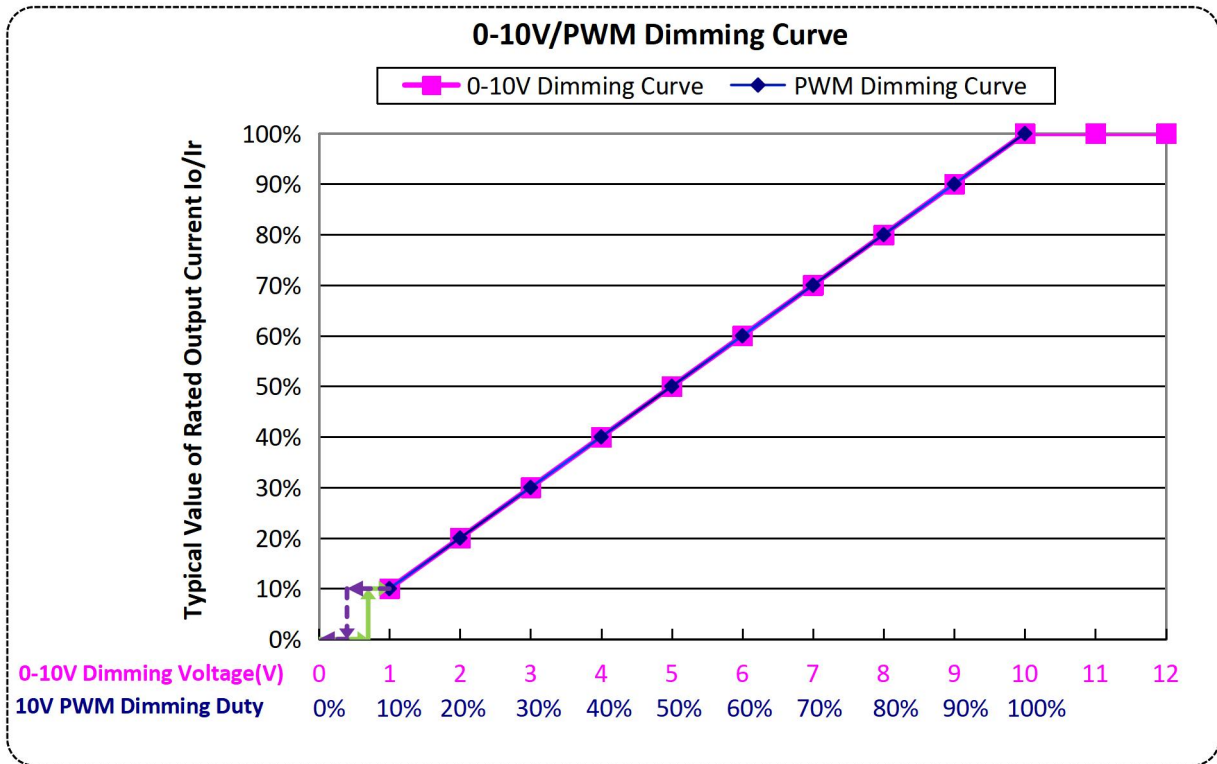

**PROTECTIONS**

Parameter	Notes
Over Temperature	Decreases output current, returning to normal after over temperature is removed. The max derating could be 30% (typ.).
Short Circuit	Constant current mode and auto recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Voltage	Run into protection model when output voltage exceeds limit, and return to normal when the fault condition is removed.

MECHANICAL OUTLINE

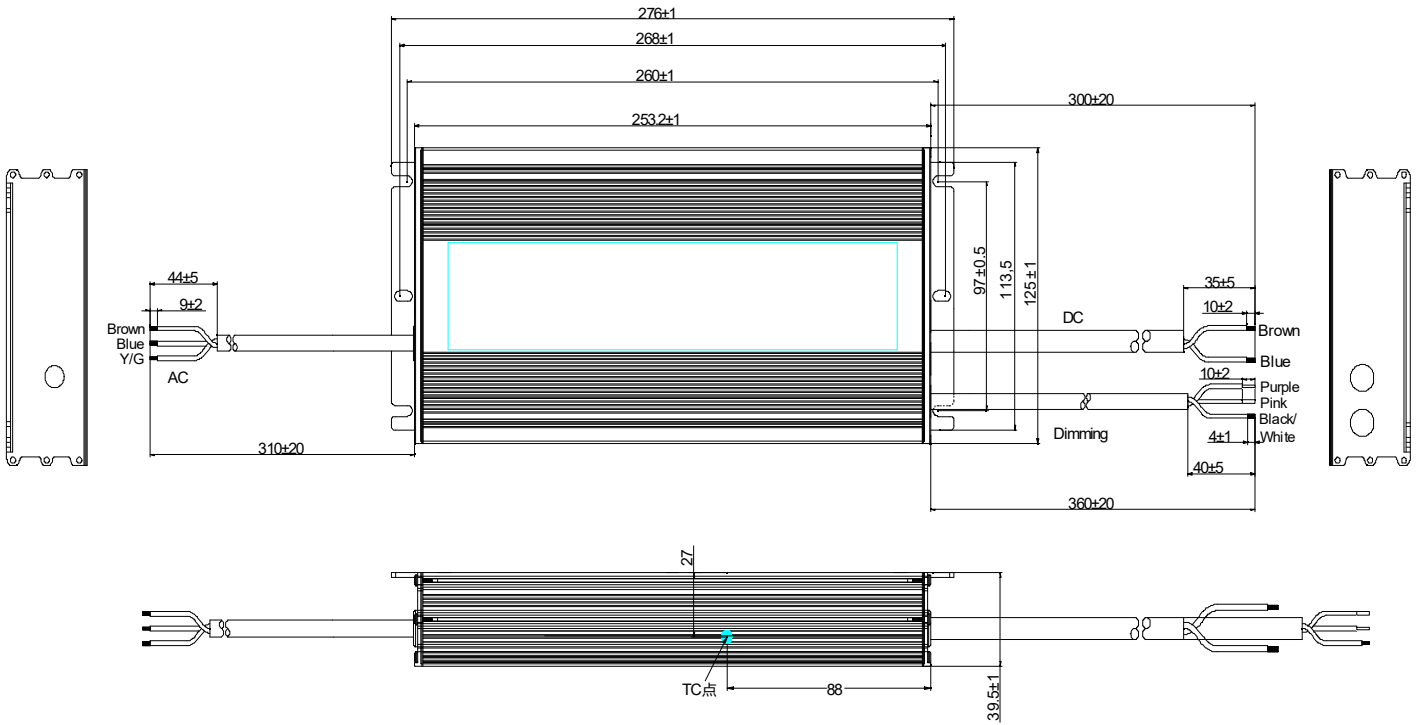

X6-480V types without dimming wire.

Wire	Specification	Note
Input	SJOW 17AWG*3C external diameter: 8.2mm L=310±20mm;	CCC+CE+UL
Output	CCC+VDE*2C external diameter: 9.6mm L=300±20mm;	CCC+CE
Dimming	UL 21996 22AWG*3C external diameter: 5.0mm L=360±20mm	A12 types

### Label

230.00 mm

**INPUT**

L (BROWN 棕)

G (Y/G 黄/绿)

⊥

N (BLUE 蓝)

**MOSO<sup>®</sup> X6-480M060A12**  
LED DRIVER  
LED 控制装置(模组)

INPUT (输入)	100-240V~50/60Hz, 6.0A Max. PF:0.95, 550W 277V~ 50/60Hz, 2.3A Max (277V~ for North America only)
OUTPUT (输出)	30-60V== 1.0-10.0A Max.电压: 70V == Max.Power(最大功率):480W
t <sub>a</sub> : 90℃	t <sub>a</sub> : 45℃ Input:100-200V~ t <sub>a</sub> : 55℃ Input:200-240V~,277V~

Suitable for Dry, Damp and Wet locations  
SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD  
No.1061, Songbai Road, Xili Town, Nanshan District,  
Shenzhen, CHINA

**OUTPUT**

(BROWN 棕) Vo +

(BLUE 蓝) Vo -


(PURPLE 紫) DIM +

(PINK 粉) 12V/DIM-

(BLACK/WHITE 黑白) 12V +

45.00 mm

### Output Side Label

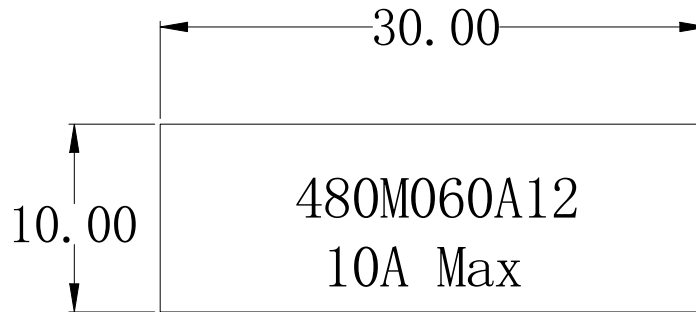



## Specification for Approval

Product Name: 480W outdoor off-line programmable driver  
Product Model: X6-480M060A12   
Rev.: B.2  
Sample Date:

CUSTOMER AUTHORIZED SIGNATURE		
Tested By	Checked By	Approved By
(Company seal)Return one copy to MOSO with approved signature and company seal.		

XiLi Songbai Road 1061, Nanshan  
Address: District, Shenzhen City, Guangdong Province, P.R.China Post Code: 518108  
TEL: 0755-27657000 FAX: 0755-27657908  
E-mail: wcx@mosopower.com Web site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By

## Product Specification

Product Name: 480W outdoor off-line programmable driver  
Product Model: X6-480M060A12   
Rev. B.2

XiLi Songbai Road 1061, Nanshan  
Address: District, Shenzhen City, Guangdong Province, P.R.China Post Code: 518108  
TEL: 0755-27657000 FAX: 0755-27657908  
E-mail: wcx@mosopower.com Web site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By