

## Specification for Approval

Product Name: 320W High Bay Driver

G6-320M260A12T ( II )

Product Model: G6-320M260T ( II )

G6-320V260T ( II )

Rev.: B.2

Address: Xi Li Song bai Road 1061, Nanshan District, Shenzhen City, Guangdong Province, P.R. China

Post Code: 518108

TEL: 0755-27657000

FAX: 0755-27657908

E-mail: [info@mosopower.com](mailto:info@mosopower.com)

Web site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By

## Specification for Approval

Product Name: 320W High Bay Driver

G6-320M260A12T (II)

Product Model: G6-320M260T (II)

G6-320V260T (II)

Rev. B.2

CUSTOMER AUTHORIZED SIGNATURE		
Tested By	Checked By	Approved By
(Company seal) Return one copy to MOSO with approved signature and company seal		

Address: Xi Li Song bai Road 1061, Nanshan District, Shenzhen City, Guangdong Province, P.R. China

Post Code: 518108

TEL: 0755-27657000 FAX: 0755-27657908

E-mail: [info@mosopower.com](mailto:info@mosopower.com) Web site: <http://www.mosopower.com>

Tested By	Checked By	Approved By

**ECN History**

A.1	First edition	2024-08-05
B.2	ECL202412046	2024-12-24

## Description

G6T-( II ) series is specially designed for industrial lighting applications. It is constant current LED driver that operates from 90-305Vac with 0-10V and PWM dimming function. Internal potentiometer and dip switch can adjust power and color temperature. Such round integrated structure enables the driver to have a better heat dissipation, significantly improving reliability and extending product lifetime. To ensure trouble-free operations, protection is provided against input surge, output over voltage, short circuit, and over temperature.



## Product Features

- n Universal input voltage: 90~305Vac;
- n Non-isolated constant current design, Efficiency up to 96%;
- n 12V/0.2A auxiliary power supply;
- n 3 in 1 dimmable: 0-10Vdc/PWM/Resistor;
- n Standby Power Consumption <0.5W;
- n Surge protection: DM: 6KV, CM: 6KV;
- n Protection: SCP/OVP/OTP;
- n Ingress protection rating: IP65;
- n Warranty: 5 years.

## Application

Suitable for industrial lighting.

## Models

Model	Input Voltage (Vac)	MAX Output Power (W)	Output Voltage (Vdc)	Output Current Adjustable Range (A)	Default Current (A)	Eff. (Typ.)	PF(Typ.)	THD(Typ.)
G6-320M260A12T ( II )	90~305	320	180~260	0.75~1.5	1.25	96%	0.97	10%
G6-320M260T ( II )	90~305	320	180~260	0.75~1.5	1.25	96%	0.97	10%
G6-320V260 ( II )	90~305	320	180~260	0.75~1.5	1.25	96%	0.97	10%

Notes:

[1].All specifications are measured at 25°C ambient temperature, input voltage 230Vac, and the typical value tested at full load, if no specific note.

## Optional Model Features

Model	Dim to off 0-10V/PWM /Resistor	1-10V/PWM /Resistor	Adjustable power ( single DIP)	Adjustable power/ color temperature ( double DIP)	Stepless dimming	Without afterglow
G6-320M260A12T ( II )	√	-	optional	optional	-	Standard: afterglow, Without afterglow (optional);
G6-320M260T ( II )	-	√	optional	optional	-	M version default dimming does not turn off
G6-320V260T ( II )	-	-	optional	optional	-	V means basic model without dimming

## Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage Range	90Vac	-	305Vac	
Rated Input Voltage	100Vac	-	277Vac	Refer to Output Power vs. Input Voltage Curve
Input Frequency AC	47Hz	50/60Hz	63Hz	
Max Input Current	-	-	3.6A	120Vac&100% load
Max Input Power	-	-	360W	120Vac&100% load
Leakage	-	-	0.70mA	IEC 60598-1; 240Vac/50Hz
Inrush Current	-	-	100A	220Vac, 100% load
Standby Power Consumption	-	-	0.5W	220Vac, dimming off, no load on auxiliary power supply
Power Factor	0.95	0.97	-	230Vac, 50/60Hz, 100% load
	0.90	-	-	120-277Vac, 50/60Hz, 70%-100% load
THD	-	8%	10%	230Vac, 50/60Hz, 100% load
	-	-	20%	120-277Vac, 50/60Hz, 70%-100% load
MCB(B16)	-	4	-	230Vac; 100% load

## Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Voltage Range	180Vdc	-	260Vdc	
Open Circuit Voltage	-	-	310Vdc	
Output Current Adjustable Range	0.75A	-	1.5A	
Full Power Current Range	1.23A	-	1.5A	213-260Vdc
		1.25A		Max
		1.0A		Middle
Dip Switch Adjustable Power	1.23A	0.75A		Min
Current Accuracy	-8%	-	+8%	
Total Output Current Ripple (pk-pk)	-	10%	15%	20MHz BW full load & LED load the LED load ripple is slightly different for different LEDs
Startup Overshoot Current	-	-	10%	120-277Vac full load condition, LED load
Auxiliary Source output voltage	10.8V	12V	13.8V	
Auxiliary Source output current	-	-	200mA	
Line Regulation	-5%	-	+5%	25°C±10°C ambient temperature, input voltage changes from 120Vac to 277Vac
Load Regulation	-5%	-	+5%	25°C±10°C ambient temperature, 230Vac input, load changes from 70% to 100%
Turn-on Delay Time	-	-	1.0s	120-277Vac, 100% load

## General Specification

Parameter	Min.	Typ.	Max.	Notes
Efficiency @120Vac	91%	93.5%	-	1.33A, 240Vdc; 25°C ambient temperature, no load of auxiliary source
Efficiency @230Vac	93%	96%	-	1.33A, 240Vdc; 25°C ambient temperature, no load of auxiliary source
Efficiency @277Vac	94%	96%	-	1.33A, 240Vdc; 25°C ambient temperature, no load of auxiliary source
MTBF	-	200Khours	-	25°C±10 ambient temperature, 230Vac, 80% load (MIL-HDBK-217/SR-332)
Lifetime	-	50Khours	-	230Vac&100% load, Tc 80°C, refer to lifetime vs. case temperature curve
Operating Temperature Ta	-40°C	-	+50°C	
Operating Case Temperature for Safety Tc_s	-40°C	-	+90°C	
Operating Case Temperature for Warranty Tc_w	-40°C	-	+80°C	5 years warranty shell temperature Humidity: 10%-90% RH
Storage Temperature Ta	-40°C	-	+85°C	Humidity: 5%-95% RH
Altitude	-60m	-	4000m	
Over Temperature Protection Tc	90°C	95°C	100°C	Decreases output current, returning to normal after over temperature is removed
Short Circuit Protection	-	-	15W	Constant current mode. The output shall return to normal when the fault condition is removed.
Output Over Voltage Protection	-	-	5W	When the output voltage of the product exceeds the limit range, it will enter the protection state. When the fault is removed, the product will automatically return to normal.
Dimensions (Φ*H)mm	Φ146.1*H61.8			
Net Weight	1000±50g/PCS			
Package (L*W*H)	460*390*200 mm; 8PCS/Ctn., GW:9.0Kg			

## Dimming

Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage	-	10V	15V	On the Vdim (+) Pin
Source Current on Vdim (+)Pin	-	100uA	200uA	
Dimming Range	10% I <sub>o max</sub>	-	100% I <sub>set</sub>	I <sub>set</sub> =0.75-1.5A
Suggest Dimming Input 0-10V	0V	-	10V	
Turn-on voltage	0.8V	-	1.1V	For A12 version
Turn-off voltage	0.6V	-	0.9V	
PWM in High Level	9.7V	-	10.3V	
PWM in Low Level	0V	-	0.3V	
PWM in Frequency Range	1KHz	-	2KHz	
PWM in Duty Cycle	1%	-	99%	
Turn-on duty cycle	8%	-	11%	For A12 version
Turn-off duty cycle	6%	-	9%	
Resistor Range	0	-	100KΩ	

## Safety Specifications

Parameter	UL	TUV	Note
Dielectric Strength (Input-Ground)	1600Vac	1500Vac	60s, Current not exceeding 5mA input L/N short-circuit
Grounding Resistance	≤0.1Ω		UL:25°C±10°C Ambient Temperature, pass 30A Current, 120s. TUV:25°C±10°C Ambient Temperature, pass 25A Current, 60s.
Insulation Resistance	≥10MΩ		Input-PE, 500Vdc/60s/25°C

Notes: The voltage resistance requirement of aluminum substrate is greater than 2KVac.

## Safety Compliance

Safety Category	Safety normative standards	Certification	Notes
CCC	GB/T 19510.213 GB/T 19510.1	√	
CE	EN61347-1, EN61347-2-13, EN62493	√	
ENEC	EN61347-1, EN61347-2-13, EN62384	√	
CB	IEC61347-1, IEC61347-2-13	√	
BIS	IS 15885(PART 2/SEC 13)		
UL	UL 8750	√	
CUL	CSA C22.2 No.250.13	√	
KC	K61347-1, K61347-2-13		
PSE	J61347-1, J61347-2-13		
SAA	AS/NZS IEC 61347.2.13	√	
SAA	AS/NZS 61347.1	√	


## EMC Compliance

EMC Category	Standards	Approved	Notes
CCC	GB/T 17743, GB 17625.1	√	
CE	EN 55015	√	
CE	EN 61000-3-2, EN 61000-3-3	√	
CE	EN61000-4-2,3,4,5,6,11	√	
CE	EN 61547	√	
KC	K61547		
KC	K00015		
PSE	J55015		
FCC	FCC part 15	√	Class B
Surge Shock Immunity	ANSI/C82.77-5-2017		
	IEC/EN 61000-4-5	√	
Ringing Wave	IEC/EN 61000-4-12		
	ANSI/IEEE C62.41.2		

## RoHS


Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU.

Inrush Current Waveform

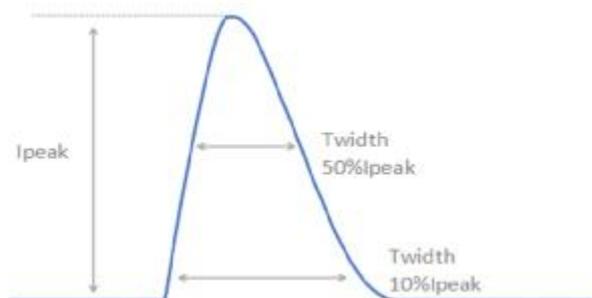


Vin	Ipeak	T(@10% of Ipeak)	T(@50% of Ipeak)
230Vac	50A	1120µs	560µs


Output Voltage vs. Output Current

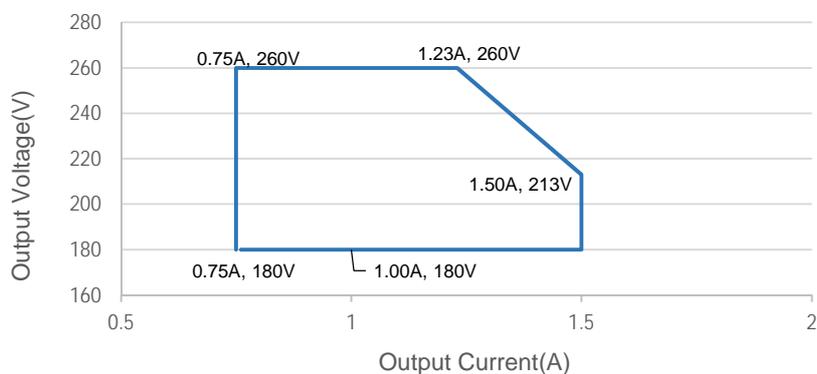


Output Power vs. Input Voltage

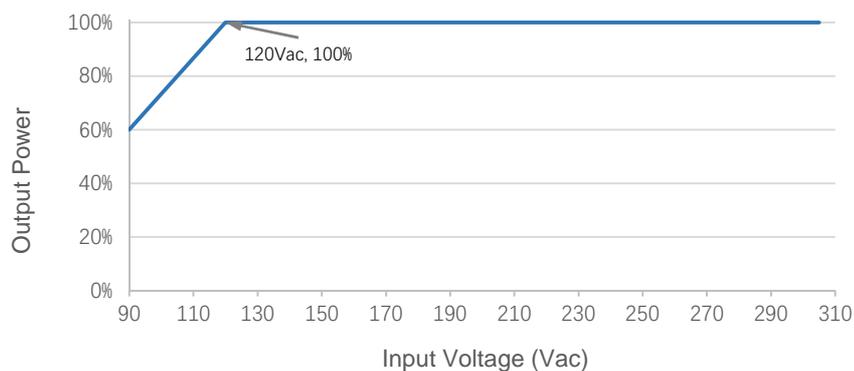


Efficiency vs. Load

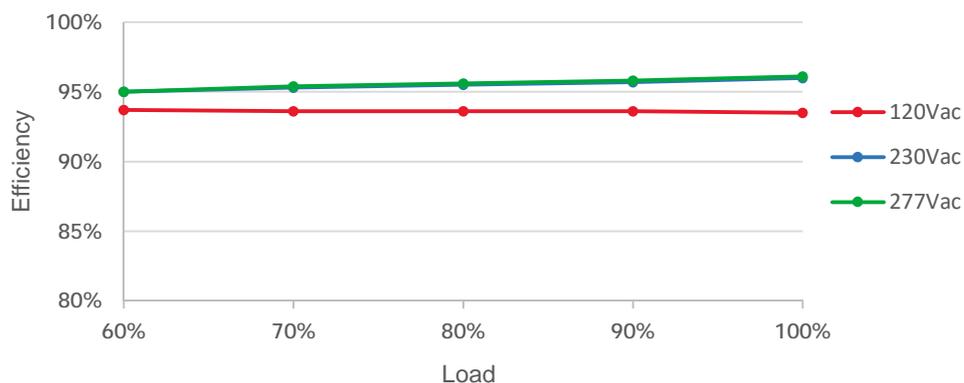


PF vs. Load

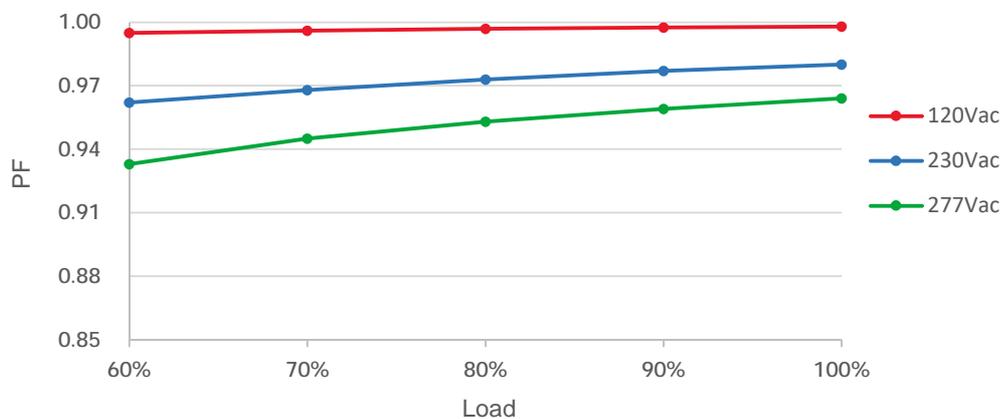


THD vs. Load

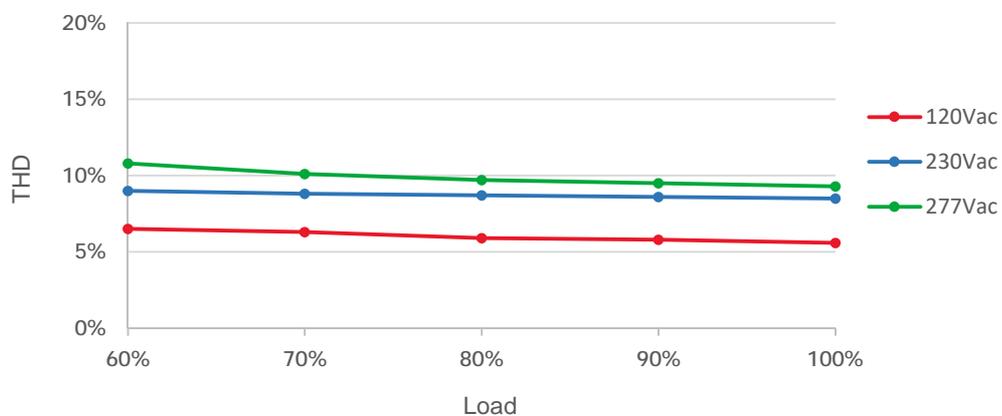


Output Power vs. Case Temperature

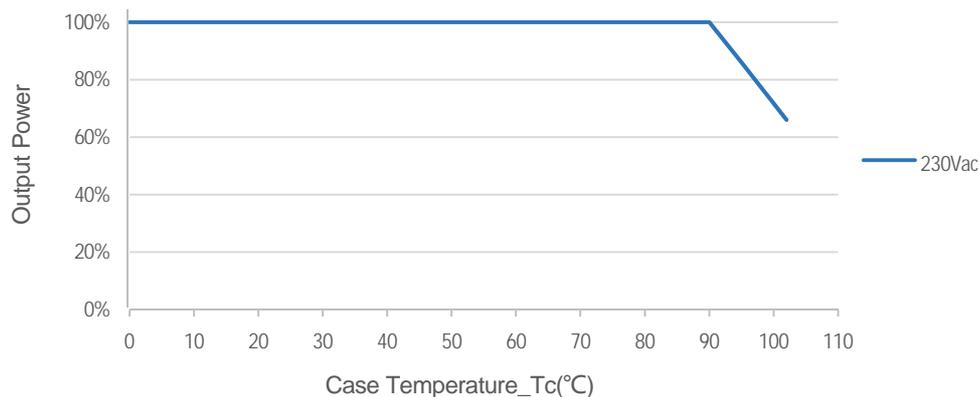


Lifetime vs. Case Temperature

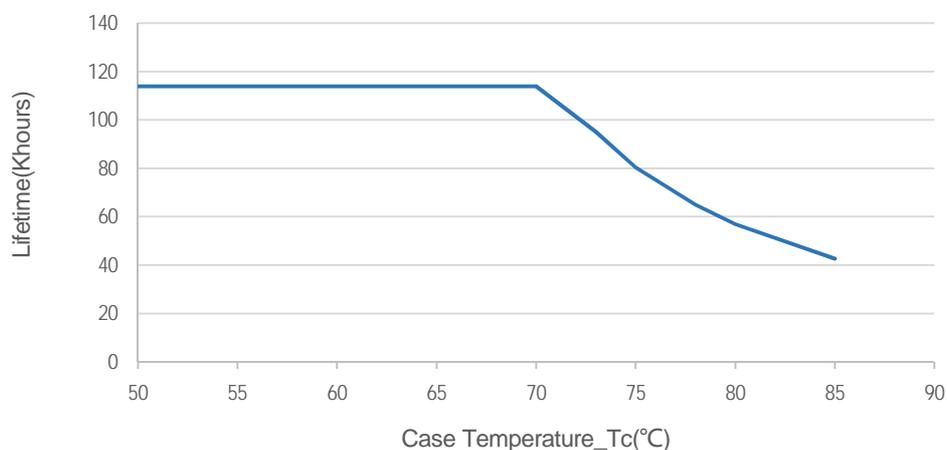

0-10V/PWM/ Resistor Dimming

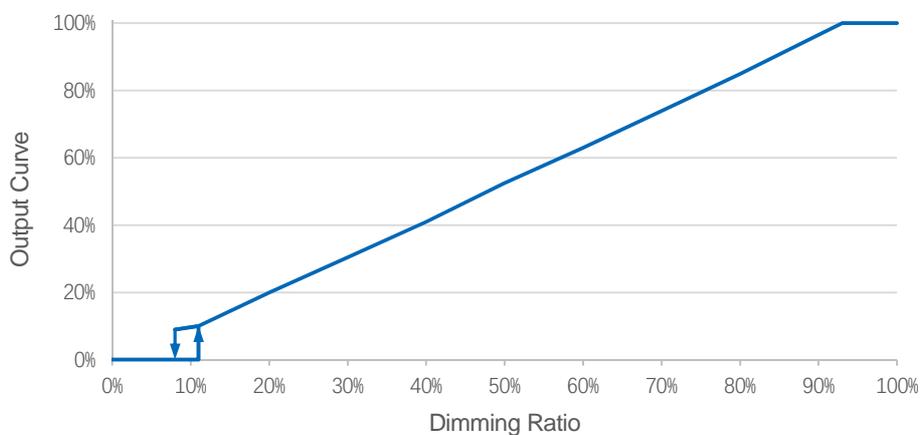



Notes: A12 version default dim to off

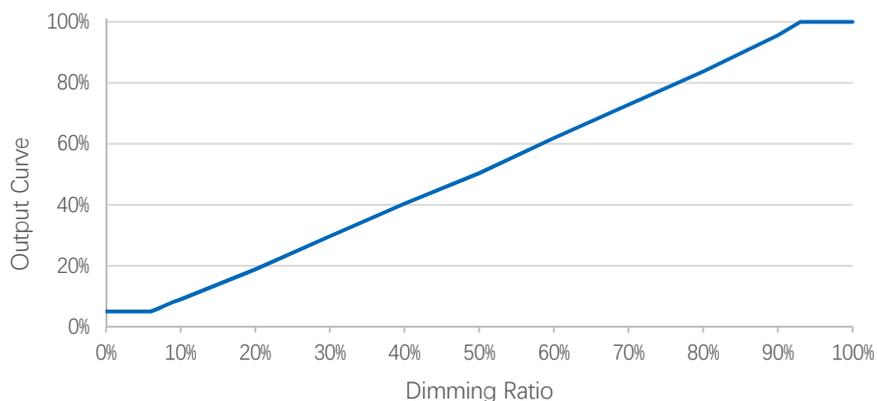


Notes: M version default dimming does not turn off.

### Dip Switch Diagram

CCT POWER IoADJ

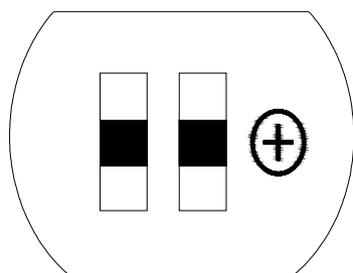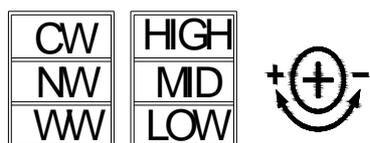


POWER Io ADJ

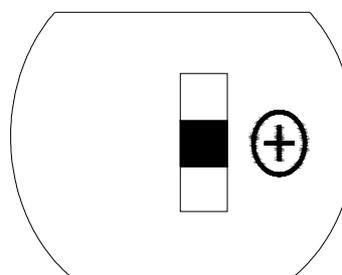


Function	Description		
Color Temperature	Cool colors(CW)	Mixed colors(NW)	Warm colors(WW)
Power	HIGH (100%) :1.25A	MID (80%) :1.0A	LOW (60%) :0.75A

Notes: Using the dip switch when adjusting the color temperature or power, please operate it after the input is powered off.



Mechanical Outline

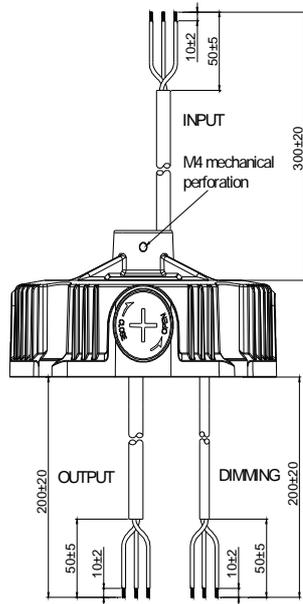


A12 version

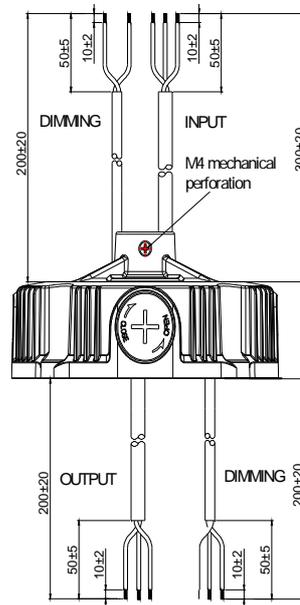

A12 version

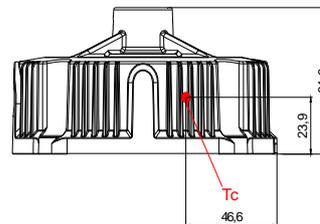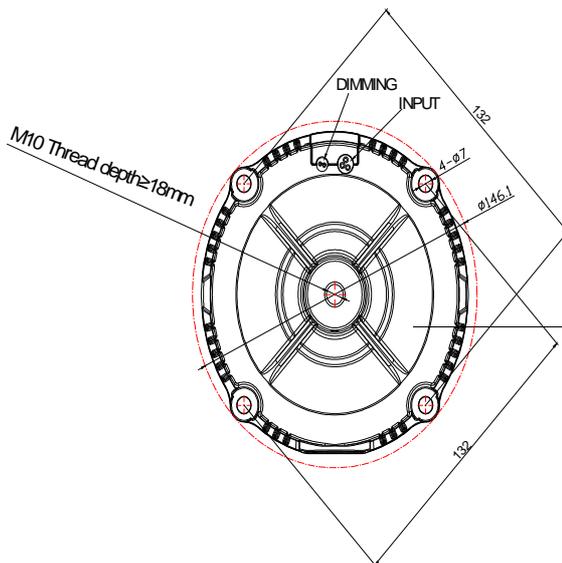

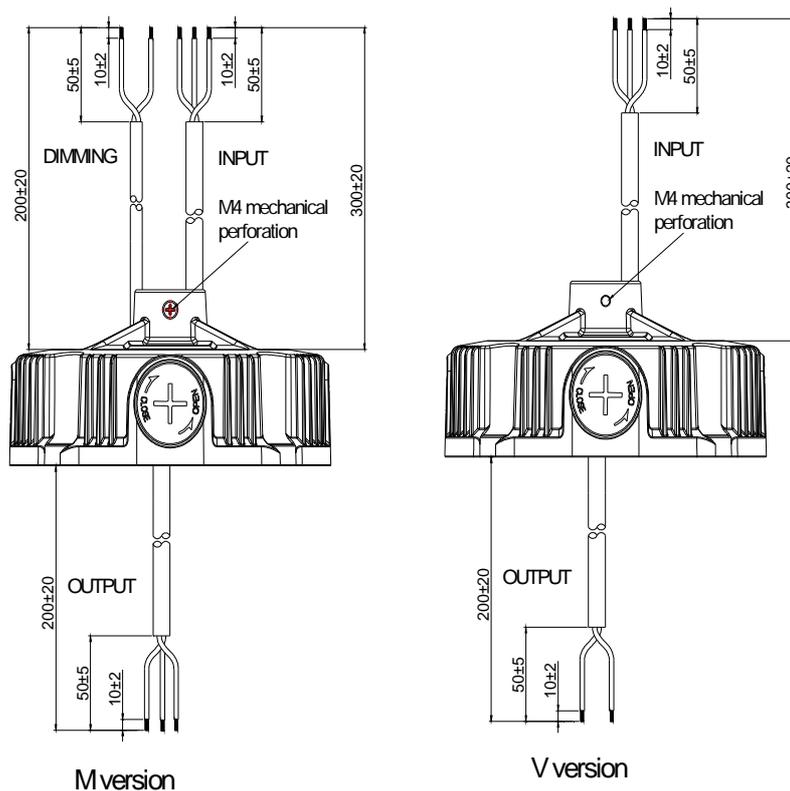

## Specifications

Input	CCC+VDE H05RN-F 3*1.0 mm2 Outside Diameter: 7.2mm L=300±20mm Strip 50±3mm, Tinning 10±1mm; L: brown, N: blue, G: yellow/green	CCC/CE
	UL SJTW 18AWG*3C Outside Diameter: 7.8mm L=300±20mm, Strip 50±3mm Tinning 10±1mm; L: black, N: white, G: green	UL
Output	CCC+VDE H05RN-F 2x1.0mm2 Outside Diameter: 6.8mm L=200±20mm Strip 50±3mm, Tinning 10±1mm; LED+: brown, LED-: blue	CCC/CE
	CCC+VDE H05RN-F 3x1.0mm2 Outside Diameter: 7.8mm L=200±20mm Strip 50±3mm, Tinning 10±1mm; LED+: brown, LED1-: blue, LED2-: black	CCC/CE (double DIP)
	UL SJTW 18AWG*2C Outside Diameter: 7.2mm L=200±20mm, Strip 50±3mm, Tinning 10±1mm; LED+: red, LED-: black	UL
	UL SJTW 18AWG*3C Outside Diameter: 7.8mm L=200±20mm, Strip 50±3mm, Tinning 10±1mm; LED+: red, LED1-: black, LED2-: pink	UL(double DIP)
Dimming	UL 2733 22AWG*2C Outside Diameter: 5.45mm L=200±20mm, Strip 50±3mm, Tinning 10±1mm; DIM+: purple, DIM-: pink	M version
	UL 21996 22AWG*3C Outside Diameter: 5.0mm L=200±20mm, Strip 50±3mm, Tinning 10±1mm; DIM+: purple, DIM-: pink/12V-, black and white: 12V+	A12 version