

# Specification for Approval

Product Name: 100W Non-isolated LED Driver

Product Model: MNC-100M240   
MNC-100V240

Rev.: D.2

Sample Date: -

| CUSTOMER AUTHORIZED SIGNATURE   |            |             |
|---|------------|-------------|
| Tested By   | Checked By | Approved By |
|   |            |             |
| (Company seal)Return one copy to MOSO with approved signature and company seal. |            |             |

XiLi Songbai Road 1061, Nanshan  
Address: District, Shenzhen City, Guangdong Province, P.R.China Post Code: 518108

TEL: 0755-27657000 FAX: 0755-27657908

E-mail: info@mosopower.com Web site: http://www.mosopower.com

| Prepared By | Checked By | Approved By |
|-------------|------------|-------------|
|             |            |             |

# Product Specification

Product Name:      100W Non-isolated LED Driver  
Product Model:      MNC-100M240   
                                 MNC-100V240   
Rev.                      D.2

XiLi Songbai Road 1061, Nanshan  
Address: District, Shenzhen City, Guangdong      Post Code: 518108  
Province, P.R.China  
TEL: 0755-27657000      FAX: 0755-27657908  
E-mail: info@mosopower.com      Web site: http://www.mosopower.com

| Prepared By | Checked By | Approved By |
|-------------|------------|-------------|
|             |            |             |

**REVISION HISTORY**

| Version | Description of Change |                    | Date       | Notes |
|---------|-----------------------|--------------------|------------|-------|
|         | Before                | Now                |            |       |
| A.2     | —                     | Datasheets Release | 2021-12-15 |       |
| B.2     |                       | ECL202203022       | 2022-03-08 |       |
| C.2     |                       | Updade files       | 2022.05.28 |       |
| D.2     |                       | ECL202208052       | 2022-08-18 |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |
|         |                       |                    |            |       |



**Product Features:**

- Input voltage range: 90~305Vac;
- Constant current design;
- THD<10%;
- 3-in-1 dimmable: 0~10Vdc, PWM, Resistor;
- Output current adjustable by potentiometer;
- Output and Dimming Signal Isolating;
- Surge protection:4KV line-line, 6KV line-earth;
- Protections: Output OVP, SCP; OTP;
- IP65 design for indoor and outdoor applications;
- Suitable for dry / damp / wet locations;
- 5 years warranty.

**Application:**

- Suitable for LED roadway lighting, plant lighting, industrial lighting, landscape lighting, etc.

**DESCRIPTION**

The MNC-100 series is a 100W non-isolated constant-current, IP65 LED driver that operates from 90-305Vac input with excellent power factor and low THD. It is created for industrial lights, tunnel and street lights. The high efficiency of these drivers and compact metal case enable them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, output over temperature, and short circuit.


**MODELS**

| Model Number | Input voltage range(Vac) | Max Output Power (W) | Output Voltage Range (Vdc) | Default Output | Typical Efficiency | Typical THD | Typical PF |        |
|--------------|--------------------------|----------------------|----------------------------|----------------|--------------------|-------------|------------|--------|
|              |                          |                      |                            |                |                    |             | 115Vac     | 230Vac |
| MNC-100X240  | 90-305                   | 100                  | 170-240                    | 170-217V/0.46A | 94%                | 10%         | 0.99       | 0.97   |

**Notes:**

1. X can be M or V, X=M means dimmable. X=V means non-dimmable.
2. All specifications are measured at 25°C ambient temperature, input voltage 230Vac, and the typical value tested by full load, if no specific note.

**OPERATING AREA I-V**

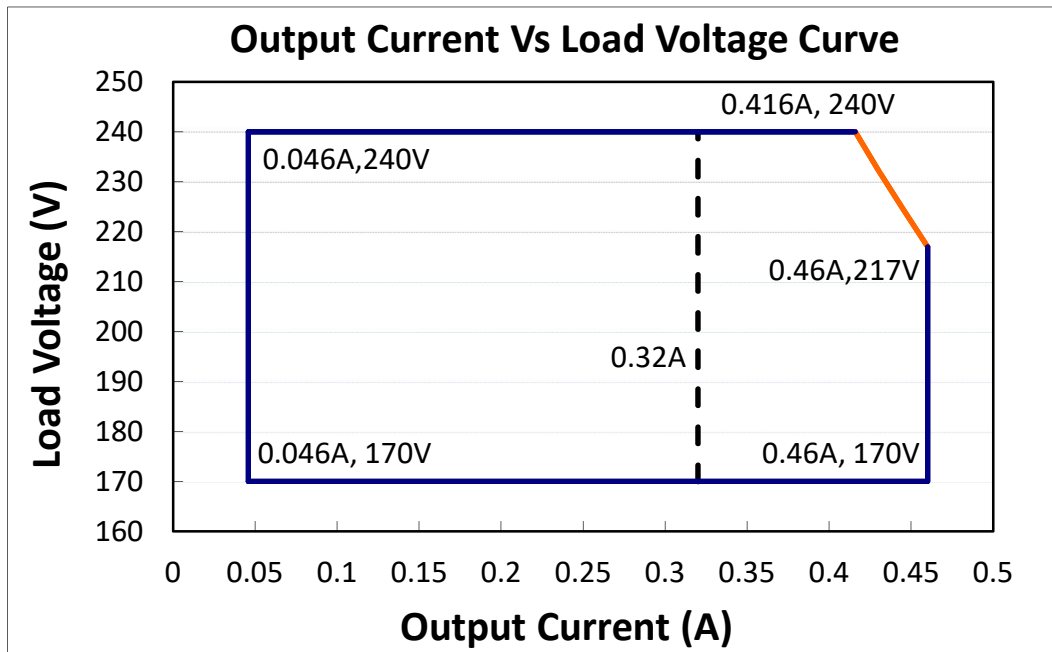

Note: At full range output voltage, the maximum power output is 100W, output current setting suitable for the right area of the dotted line.

**INPUT SPECIFICATIONS**

| Parameter                           | Min.  | Typ.       | Max.   | Notes                              |     |    |                  |
|-------------------------------------|-------|------------|--------|------------------------------------|-----|----|------------------|
| Input Voltage                       | 90Vac | 100-277Vac | 305Vac |                                    |     |    |                  |
| Input Frequency                     | 47Hz  | 50/60      | 63Hz   |                                    |     |    |                  |
| Leakage Current                     | -     | -          | 0.75mA | 277Vac/60Hz                        |     |    |                  |
| Input AC Current                    | -     | -          | 1.5A   | 100-277Vac & full load             |     |    |                  |
| Inrush Current                      | -     | -          | 100A   | 230Vac input, Ta=25°C (cold start) |     |    |                  |
| Power Factor                        | 0.97  | 0.99       | -      | 115Vac, 50-60Hz, full load         |     |    |                  |
|                                     | 0.95  | 0.97       |        | 230Vac, 50-60Hz, full load         |     |    |                  |
|                                     | 0.92  | 0.94       |        | 277Vac, 50-60Hz, full load         |     |    |                  |
| THD                                 | -     | 10%        | 15%    | 115-230Vac, 50-60Hz, 60%-100% load |     |    |                  |
|                                     | -     | 15%        | 20%    | 277Vac, 50-60Hz, 60%-100% load     |     |    |                  |
| Max. NO. of PSUs on Circuit Breaker | B10   | 3          | B16    | 4                                  | B25 | 6  | 230Vac 100% load |
|                                     | C10   | 4          | C16    | 7                                  | C25 | 11 |                  |

**OUTPUT SPECIFICATIONS**

| Parameter                          | Min. | Typ. | Max. | Notes   |
|------------------------------------|------|------|------|---|
| Output Current Tolerance           | -8%  |      | +8%  | Iset=0.46A  |
| Output current set range(A)        | 0.32 |      | 0.46 |   |
| Total Output Current Ripple(pk-pk) | -    | -    | 20%  | 20MHz BW, full load& LED load, the ripple would be tiny different under different LED load. |
| Startup Overshoot Current          | -    | -    | 10%  | 100~277Vac & 100% Load, load is LED   |
| No Load Output Voltage(V)          | -    | 290  | 320  |   |
| Line Regulation                    | -1%  | -    | +1%  | 25°C±10°C ambient temperature, input voltage changes from 100Vac to 277Vac.                 |
| Load Regulation                    | -3%  | -    | +3%  | 25°C±10°C ambient temperature, Input Voltage 230Vac, load changes from 80% to 100%.         |
| Turn-on Delay Time                 | -    | 1S   | 3S   | 115Vac, 100% load   |
|                                    | -    | 1S   | 2S   | 230Vac, 100% load   |

**GENERAL SPECIFICATIONS**

| Parameter                                    | Min.                         | Typ.      | Max.    | Notes  |
|--|------------------------------|-----------|---------|--|
| Efficiency @115Vac                           | 90%                          | 92%       |         | Measured at full load and 25°C ambient temperature                           |
| Efficiency @230Vac                           | 92%                          | 94%       |         | Measured at full load and 25°C ambient temperature                           |
| Efficiency @277Vac                           | 92%                          | 94%       |         | Measured at full load and 25°C ambient temperature                           |
| Dielectric Strength                          | Input-PE                     | -         | 1650Vac | 10mA/60S   |
|  | Output- PE                   | -         | 1650Vac |  |
| Grounding Resistance                         | -                            | -         | 0.1Ω    | 25A/60S, under 25°C±10°C ambient temperature                                 |
| Insulation Resistance                        | 10MΩ                         | -         | -       | Input- Output, Input-PE, Output-PE, 500Vdc/60S/25°C/70%RH                    |
| MTBF   | -                            | 200000Hrs | -       | 25°C±10°C ambient temperature, 230Vac, 80% load (MIL-HDBK-217F)              |
| Lifetime                                     | -                            | 50000Hrs  | -       | 230Vac&100% load, 75°C case temperature, refer to lifetime curve for details |
| Operating Case Temperature for Safety Tc_s   | -40°C                        | -         | +90°C   |  |
| Ambient Temperature                          | -40°C                        | -         | +55°C   | 230Vac&100% load   |
| Operating Case Temperature for Warranty Tc_s | -40°C                        | -         | +75°C   | 5 years warranty case temperature Humidity: 10% to 95% RH                    |
| Storage Temperature                          | -40°C                        | -         | +85°C   | Humidity: 5% to 100% RH  |
| Dimensions (L*W*H)mm                         | L138*W55*H37mm               |           |         |  |
| Net Weight                                   | 550±100g/PCS                 |           |         |  |
| Package                                      | L500*W310*H160mm; 10PCS/Ctn. |           |         |  |

**DIMMING**

| Parameter  |             | Min.    | Typ. | Max.     | Notes                      |
|--|-------------|---------|------|----------|----------------------------|
| 0~10V Absolute Maximum Voltage on the Vdim (+) Pin |             | -       | 10V  | 20V      |                            |
| 0~10V Source Current on Vdim(+)Pin                 |             | -       | 1mA  | 2mA      |                            |
| Dimming Output Range                               | MNC-100M240 | 10%Imax | -    | 100%Imax |                            |
|  |             |         | -    |          |                            |
| Recommended Dimming Range for 0-10V                |             | 0V      | -    | 10V      | Default 0-10V/ PWM Dimming |
| PWM_in High Level                                  |             | 9.7V    | -    | 10.3V    |                            |
| PWM_in Low Level                                   |             | 0V      | -    | 0.3V     |                            |
| PWM_in Frequency Range                             |             | 300Hz   |      | 2KHz     |                            |
| PWM_in Duty Cycle                                  |             | 1%      | -    | 99%      |                            |

**SAFTY STANDARDS**

| Safety Category | Country / Territory | Standards                 | Approved |
|-----------------|---------------------|---------------------------|----------|
| CCC             | China               | GB19510.1, GB19510.14     | √        |
| CE              | Europe              | EN61347-1, EN61347-2-13   | √        |
|                 |                     | EN62493                   | √        |
|                 |                     | EN62384                   | √        |
| CB              | CB Countries        | IEC61347-1, IEC61347-2-13 | √        |
| BIS             | India               | IS 15885(PART 2/SEC 13)   |          |
| UL              | USA                 | UL 8750                   | √        |
| CUL             | Canada              | CSA C22.2 No.250.13       | √        |
| KC              | South Korea         | K61347-1, K61347-2-13     |          |
| PSE             | Japan               | J61347-1, J61347-2-13     |          |
| SAA             | Australia           | AS/NZS IEC 61347.2.13     | √        |
|                 |                     | AS/NZS 61347.1            | √        |


**EMC COMPLIANCE**

| EMC Category | Country / Territory | Standards                  | Approved |
|--------------|---------------------|----------------------------|----------|
| CCC          | China               | GB/T 17743, GB 17625.1     | √        |
| CE           | Europe              | EN 55015                   | √        |
|              |                     | EN 61000-3-2, EN 61000-3-3 | √        |
|              |                     | EN61000-4-2,3,4,5,6,11     | √        |
|              |                     | EN 61547                   | √        |
| KC           | South Korea         | K61547                     |          |
|              |                     | K00015                     |          |
| PSE          | Japan               | J55015                     |          |
| FCC          | USA                 | FCC part 15                |          |

**NOTE:**


This LED driver meets the EMI specifications above, but as a component of a luminaire, end customer need to identify the EMI performance of a luminaire including LED driver, other devices connected to the driver and on the luminaire itself.

**INRUSH CURRENT WAVEFORM**

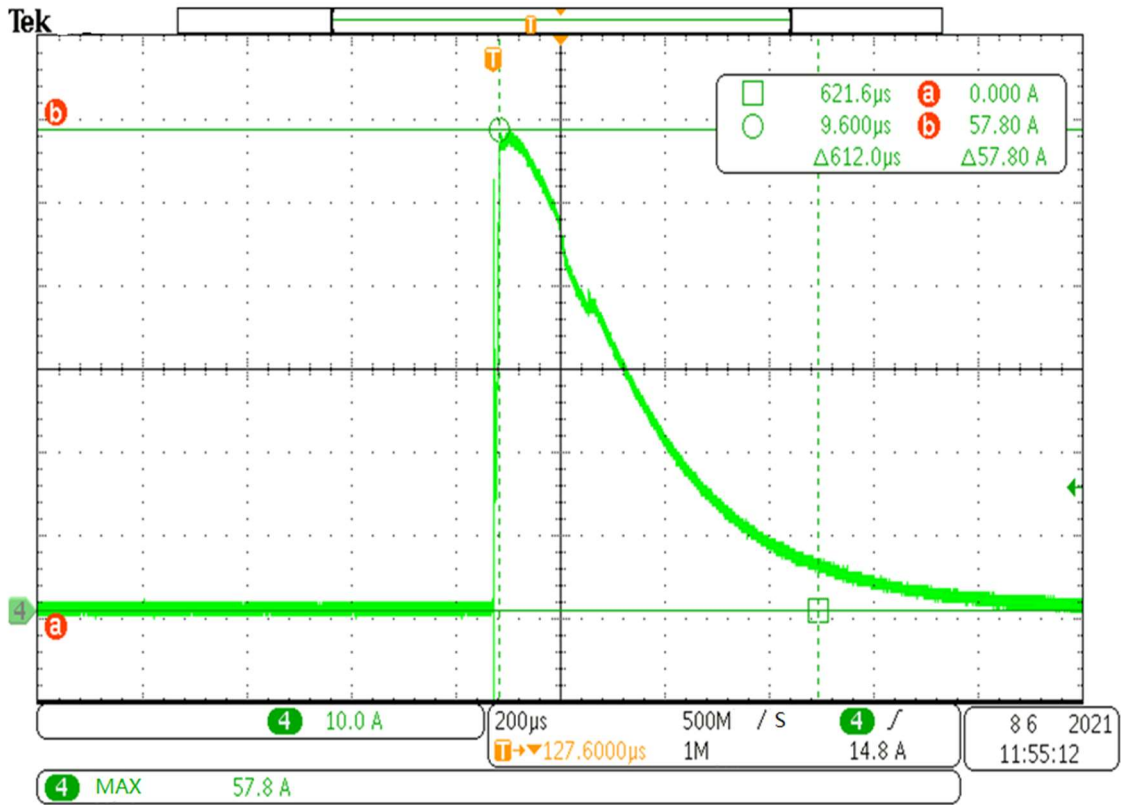


**DERATING CURVE**

**Derating Curve**

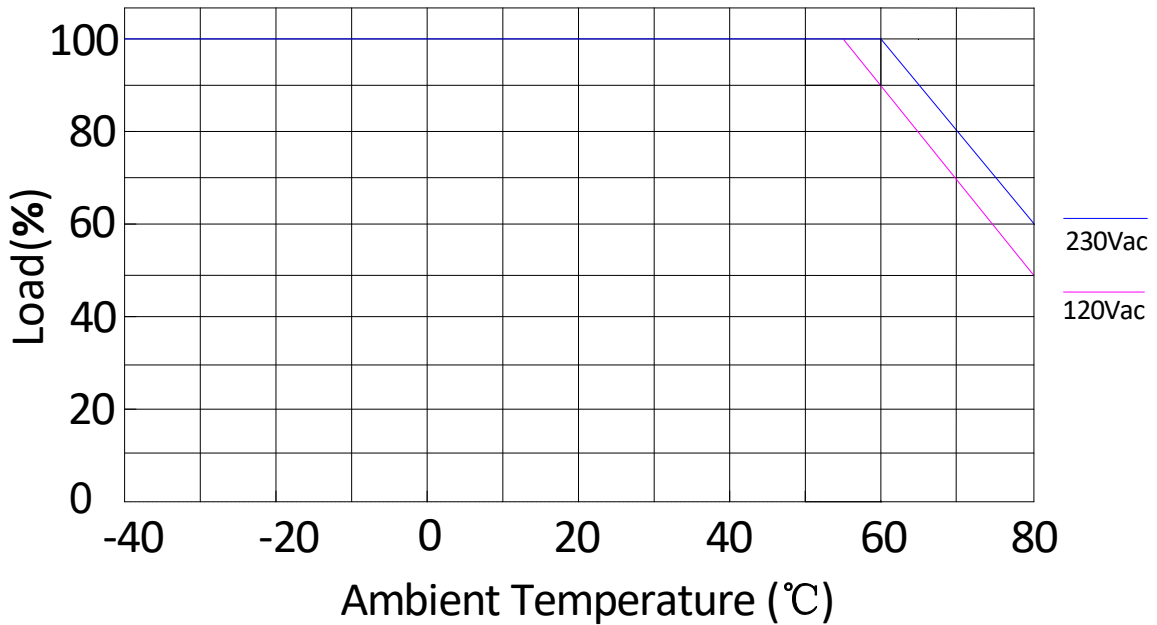





**OUTPUT POWER VS INPUT VOLTAGE**

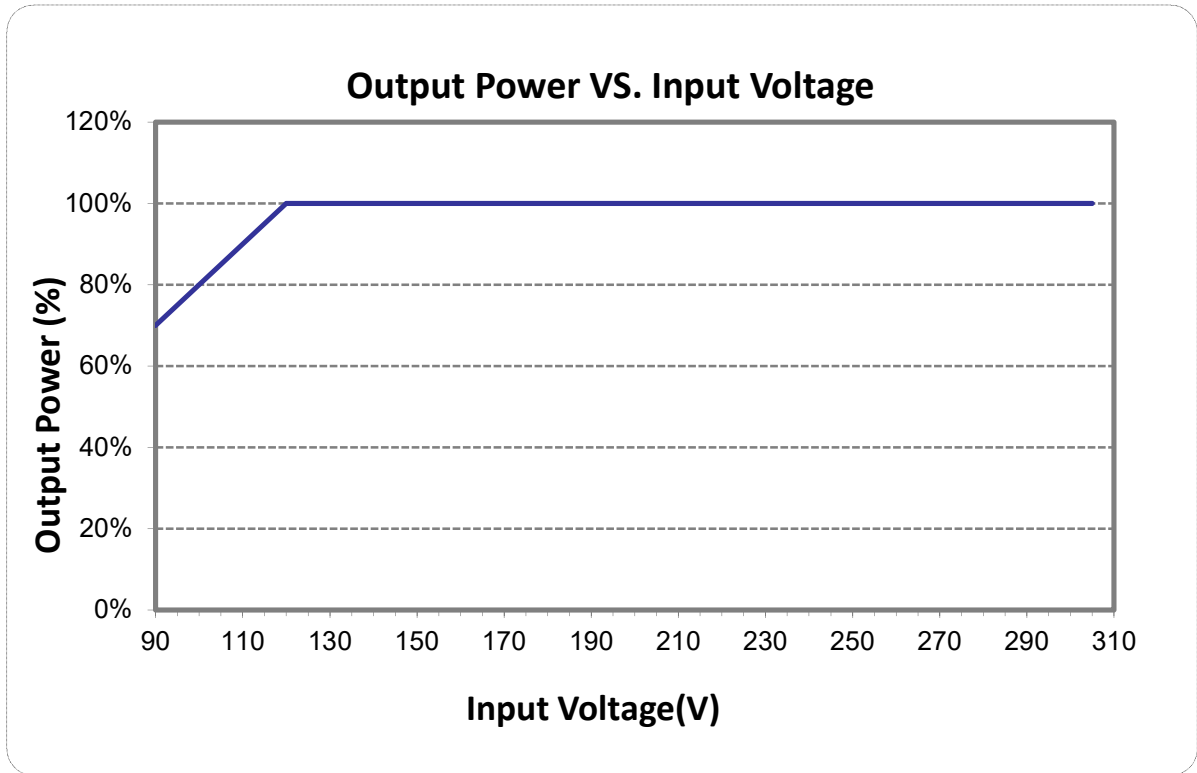


**LIFETIME VS CASE TEMPERATURE**

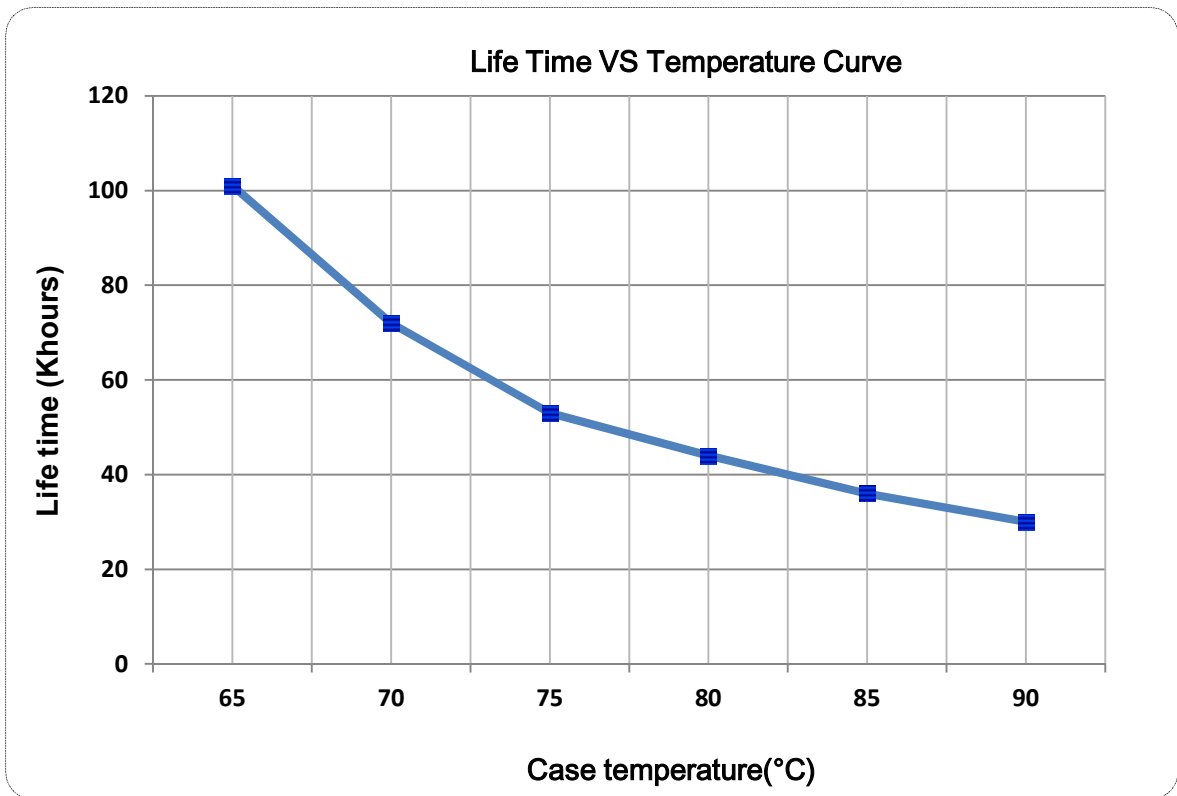


EFFICIENCY VS LOAD

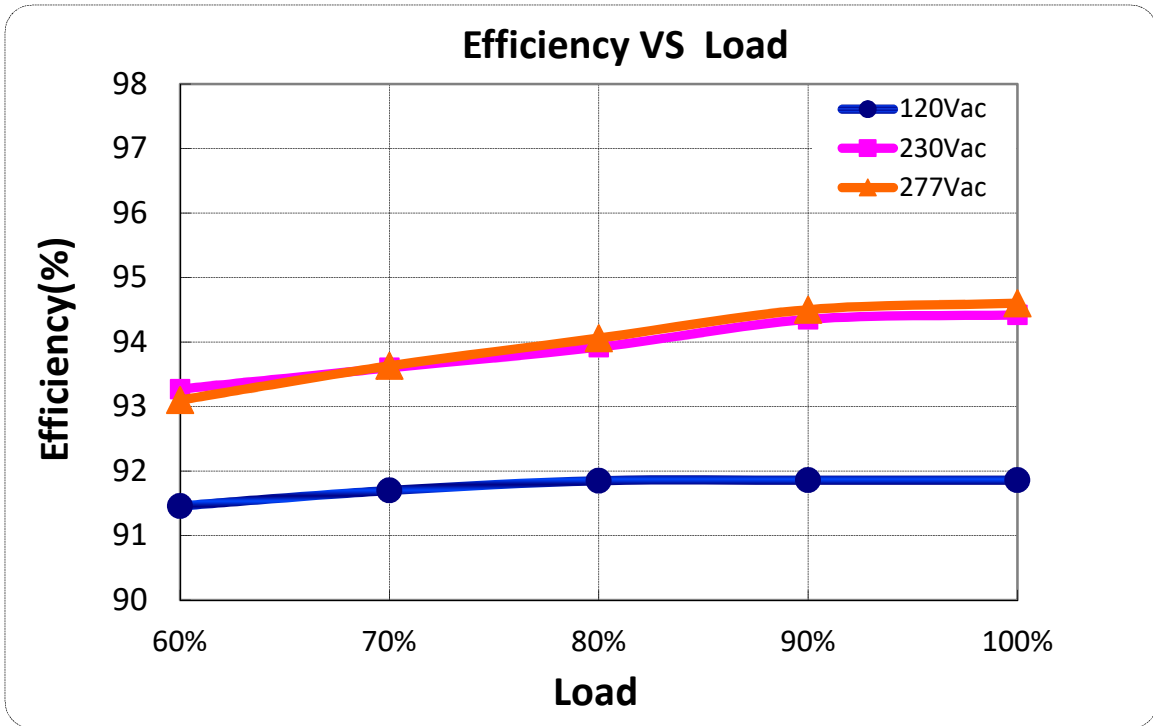

POWER FACTOR VS LOAD

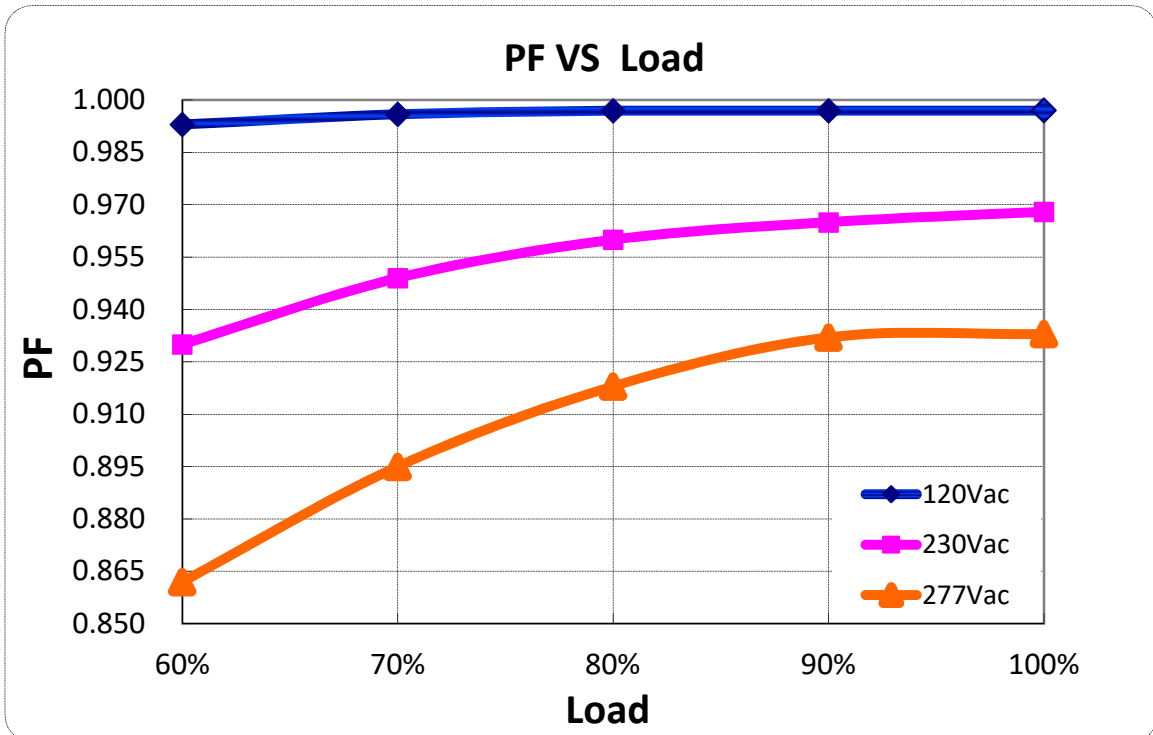

**TOTAL HARMONIC DISTORTION**

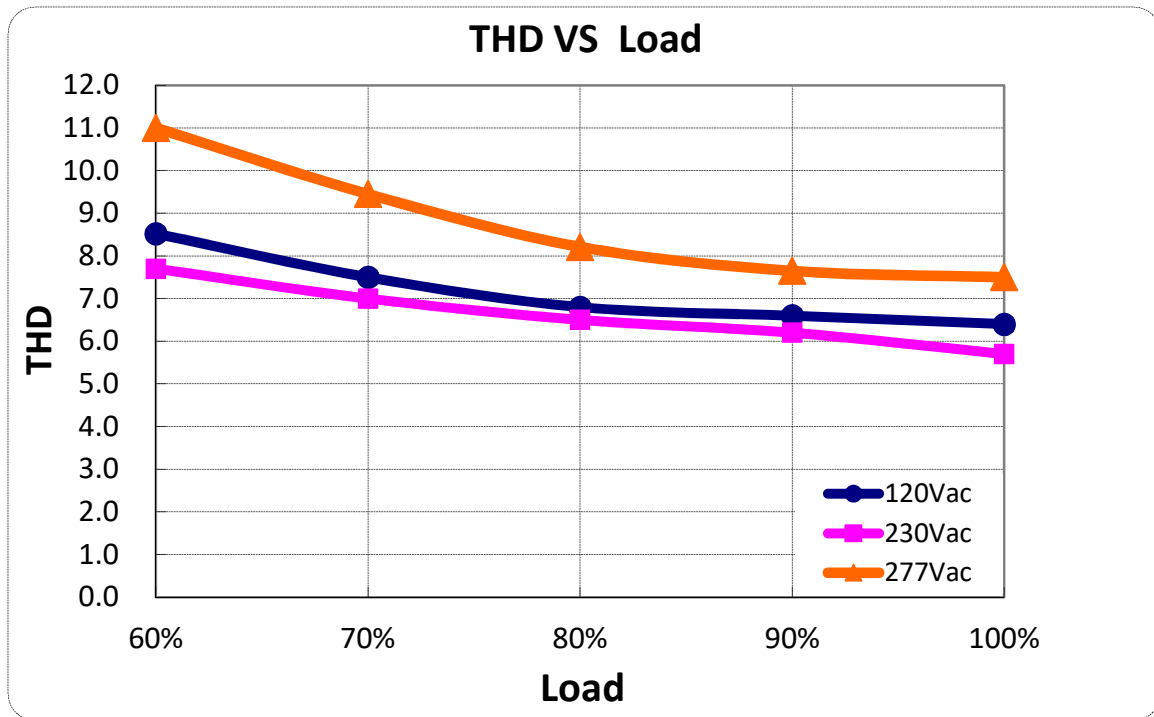


**PROTECTIONS**

| Parameter                   | Notes   |
|-----------------------------|---|
| Over Temperature Protection | Decreases output current, returning to normal after over temperature is removed, exclude auxiliary power supply.  |
| Short Circuit Protection    | Constant current and auto recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed. |
| Over Temperature Protection | Decreases output current, returning to normal after over temperature is removed.  |


**0-10V/PWM DIMMING**

X=M

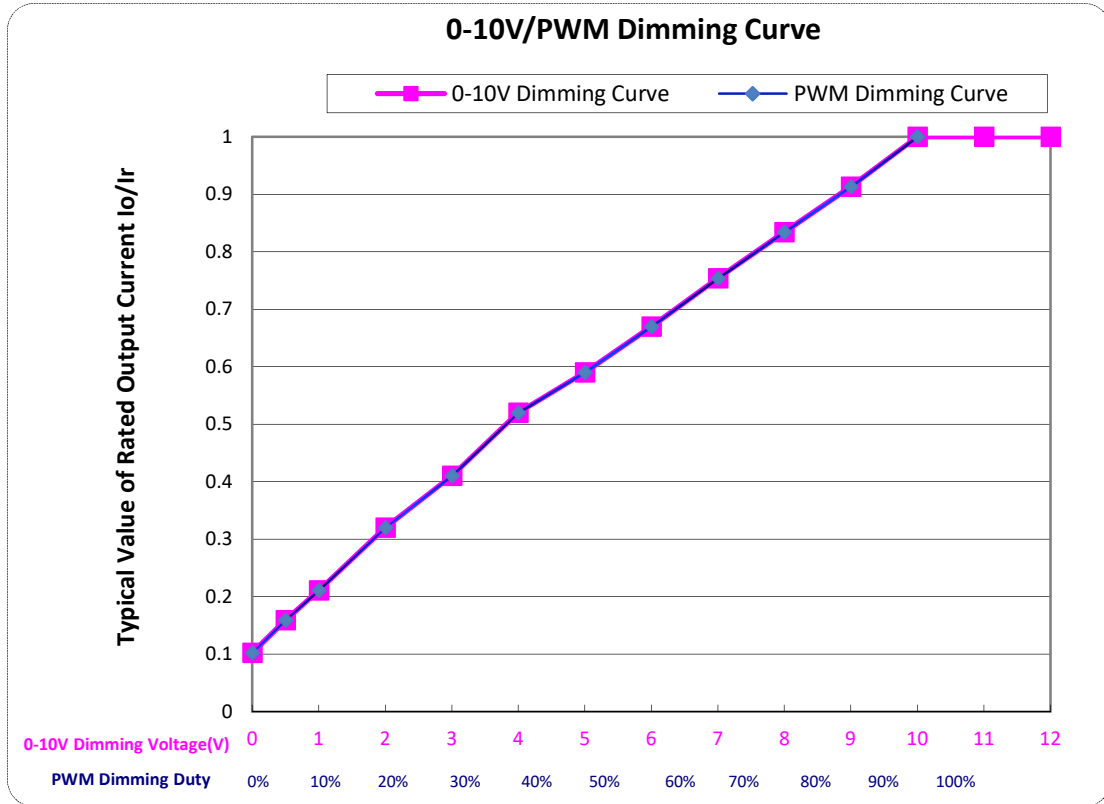


**MECHANICAL OUTLINE**

MNC-100M240

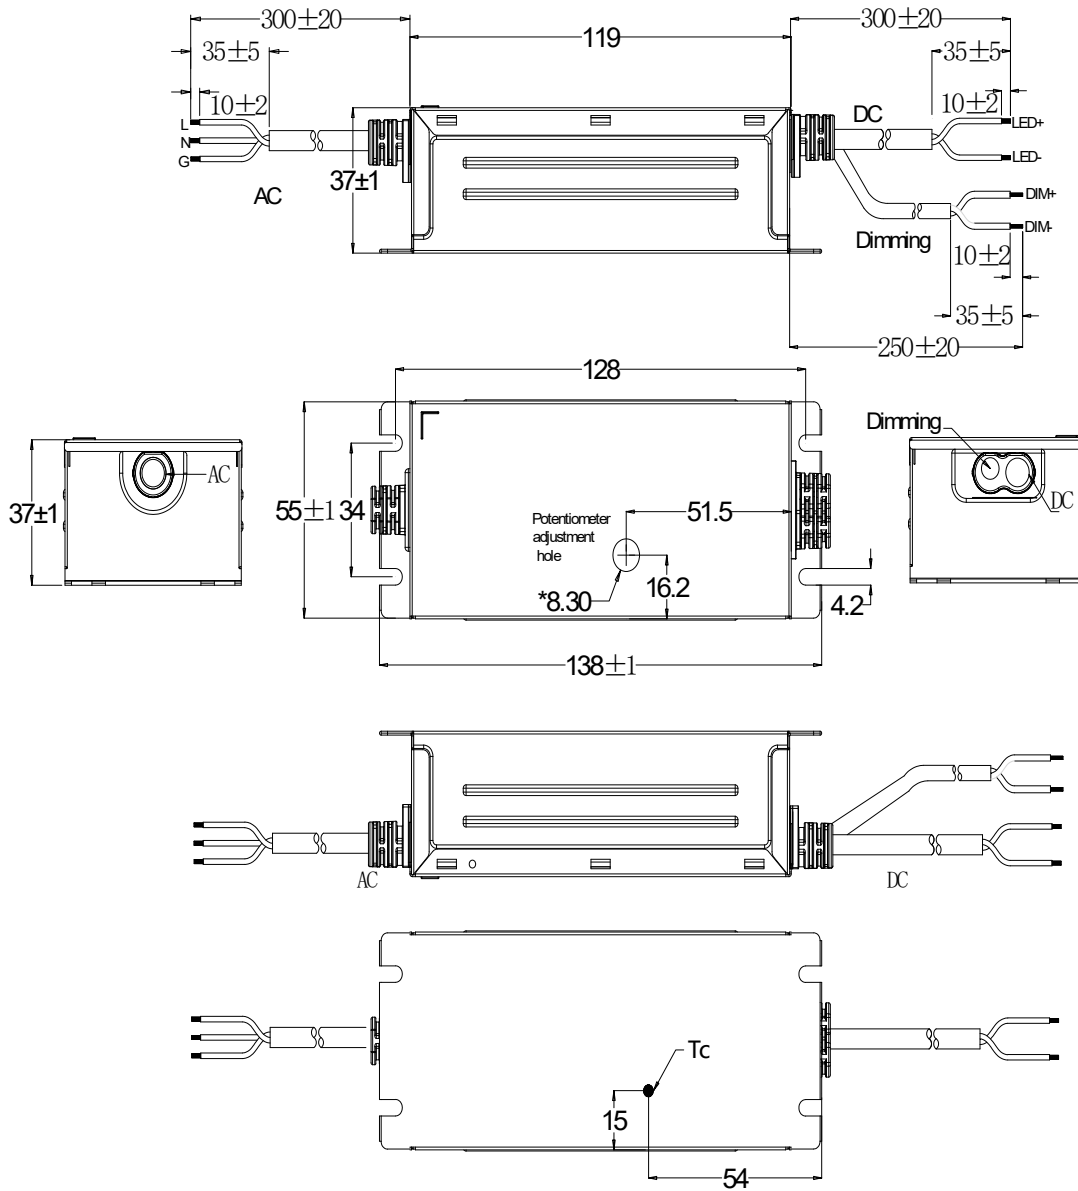

MNC-100V240

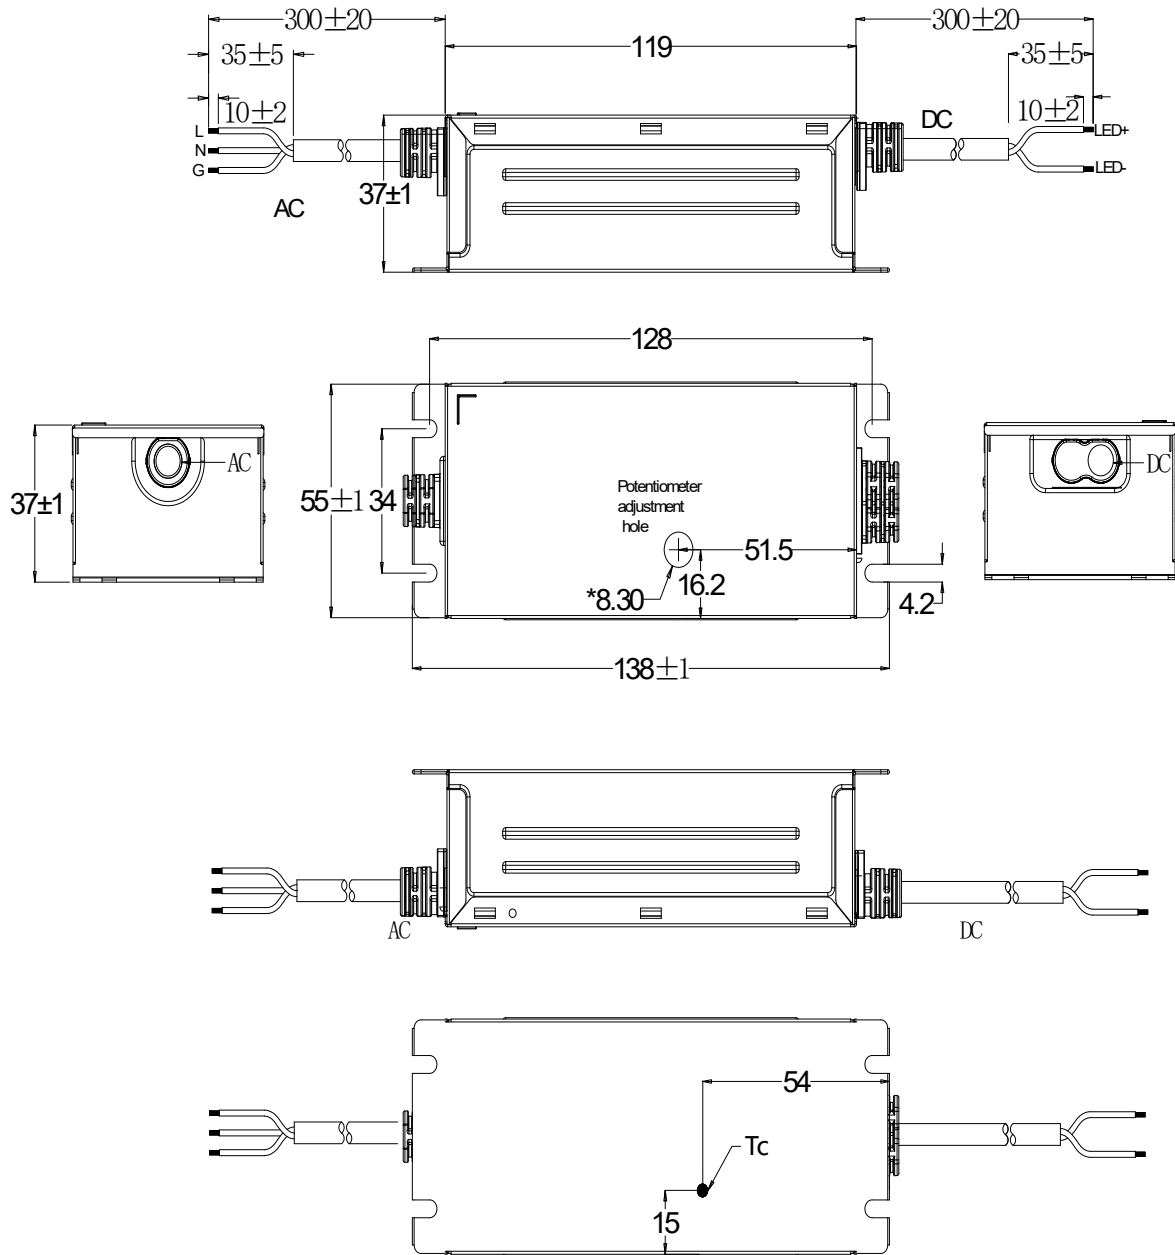

| Wire    | Specification   | Note   |
|---------|---|--------|
| Input   | CCC+VDE H05RN-F 3x1.0mm <sup>2</sup> external diameter: 7.3mm L=300±20mm<br>L:Brown, N:Blue, G:Yellow/Green | CCC/CE |
|         | UL SJOW 3C*18AWG external diameter: 8.0mm L=300±20mm<br>L:Black, N:White, G:Green                           | UL     |
| Output  | CCC+VDE H05RN-F 2x1.0mm <sup>2</sup> external diameter: 6.9mm L=300±20mm<br>LED+:Brown, LED-:Blue           | CCC/CE |
|         | UL SJOW 2C*18AWG external diameter: 7.3mm L=300±20mm<br>LED+:Red, LED-: Black                               | UL     |
| Dimming | UL2733 22AWG*2C external diameter: 5.45mm L=250±20mm<br>DIM+:Purple, DIM-:Pink                              | X=M    |