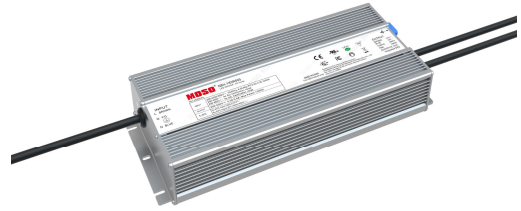


1021020004 MS033188-V0;N8H-1K0R500;(标准品);MOSO;CE+UL+ENEC(中文)(1)Description

N8H series is specially designed for industrial lighting applications. with DMX-RDM programming dimming function. This Rectangle integrated structure enables it to have a better heat dissipation cooler, significantly improving reliability and extending product life. To ensure trouble free operation, protection is provided against input surge, output short circuit, and over temperature, to ensure low failure rate.

**Product Features**

- Input voltage range: 180~528Vac;
- Constant Power design, Efficiency up to 97%;
- With NFC programmable, Three timer control optional, Constant power function off, constant lumen output, Dimming turn-off point can be set, NTC Over-temperature protection point can be set;
- Dimming: DMX-RDM Dimming method;
- AC power measurement accuracy is up to 1%;
- Output and dimming signal isolation;
- No afterglow, even if L and N wires are connected opposite;
- Standby power consumption: <0.5W@230V;
- low inrush current: <30A;
- Dimming off without afterglow;
- External NTC supported (optional);
- Surge protection: DM 6KV, CM10KV; / US standard: DM 6KV, CM 6KV (2Ω);
- Multiple protection: Input UVP, OVP, Output SCP, OTP, constant power;
- Ingress protection rating: IP67 ;
- 5 years warranty.

Application

Area and flood lighting
High-bay lighting
Sport lighting
Horticulture lighting
Aquaculture lighting

Models

Model Number	Input Voltage Range(Vac)	Max Output Power(W)	Output Voltage Range(Vdc)	Full Power Output Current Range(A)	Default Current(A)	Eff.(Typ.)	PF(Typ.)	THD(Typ.)
N8H-1K0R500	180-528	1000	200-500	2.00~3.8	2.8	97.5%	0.97	10%

NOTES:

[1]. All specifications are measured at 25°C ambient temperature, input voltage 400Vac, and the typical value tested at full load, if no specific note.

Input Specifications

Parameter	Min	Typ.	Max	Notes
Input Voltage Range	180Vac	-	528Vac	Input below 200Vac, derated output
Input Voltage Typ.	200Vac	-	480Vac	
Input Frequency AC	47Hz	50/60Hz	63Hz	
Max Input Current	-	-	6.0A	200Vac&Full Load.
Max Input Power	-	-	1080W	200Vac&Full Load.
Inrush Current	-	-	30A	480Vac&Full Load
Standby Power Consumption	-	-	0.5W	230Vac, Dimming turn-off
Power Factor(PF)	0.95	0.98	-	230Vac, 50Hz, 60%-100% Load.
Power Factor(PF)	0.90	-	-	200-480Vac, 50/60Hz, 60%-100% Load.
Total Harmonic Distortion(THD)	-	10%	20%	200-480Vac, 50/60Hz, 70%-100% Load.
MCB(B16)	-	2	-	230Vac.

Output Specifications

Parameter	Min	Typ.	Max	Notes
Output Voltage Range	200Vdc	-	500Vdc	
Open Circuit Voltage	-	-	600Vdc	
Output Current range	1%Io		100% Io	Io=3.80A
Current Accuracy	-5%	-	+5%	
Total Output Current Ripple (pk-pk)	-	5%	10%	20MHz BW, full load& LED load, the ripple would be tiny different under different LED load.
Startup Overshoot Current	-	5%	10%	200~480Vac & 100% load
Line Regulation	-3%	-	+3%	25°C±10°C ambient temperature, input voltage changes from 200Vac to 480Vac.
Load Regulation	-3%	-	+3%	25°C±10°C ambient temperature, Input Voltage 400Vac, load changes from 80% to 100%.
Turn-on Delay Time	-	-	3s	220~480Vac & 100% Load, load is LED.

General Specifications

Parameter	Min	Typ.	Max	Notes
Efficiency@220Vac	94.0%	95%	-	400Vdc, 80~100% load , 25°C ambient temperature
Efficiency@347Vac	94.5%	96.5%	-	400Vdc, 80~100% load , 25°C ambient temperature
Efficiency@400Vac	94.5%	96.5%	-	400Vdc, 80~100% load , 25°C ambient temperature
Efficiency@480Vac	95.5%	97.5%	-	400Vdc, 80~100% load , 25°C ambient temperature
Mean Time Between Failure	-	200Khours	-	25°C±10°C ambient temperature, 230Vac,80% load (MIL-HDBK-217F/SR-332).
Lifetime	-	50Khours	-	Tc=75°C, 220Vac&100% load, refer lifetime vs. Case temperature curve.
Ambient Temperature Ta	-40°C	-	+45°C	200~277Vac &100% load.
Ambient Temperature Ta	-40°C	-	+50°C	277~480Vac &100% load.
Operating Tc for Safety Tc_s	-40°C	-	+90°C	
Operating Tc for Warranty Tc_w	-40°C	-	+75°C	5 years warranty case temperature Humidity: 10% to 80% RH No condensation.
Storage Temperature Ta	-40°C	-	+85°C	Humidity: 5% to 95% RH No condensation.
Altitude	-60m	-	4000m	
Over Temperature Protection Tc	90°C	95°C	100°C	Tc; 220Vac&100% load.
Short Circuit Protection	-	-	-	Self-recovery .
Dimensions (L*W*H)	303*125*44.5mm			
Net Weight	3180±100g/PCS			
Package	539 *515 *161 mm; 5PCS /ctn, Gross Weight: 17Kg			

DMX Dimming

Parameter	Min	Typ.	Max	Notes
DMX+ to DMX-	-6V	-	6V	
DMX+ to Chassis	22M Ohm	-	-	
DMX- to Chassis	22M Ohm	-	-	
Logic 0 Input	-	-	-0.2V	DMX+ to DMX-
Logic 1 Input	0.2V	-	-	DMX+ to DMX-
Communication Baud Rate	-	250K bps	-	
Dimming Output Range	1%Io	-	100%Io	Io= 3.80A
Dimmer switch count	-	-	34	

Safety Specification

Parameter	CCC	CE/ENEC/SAA	UL	Notes
Dielectric Strength (Input-Ground)	2000Vac	2000Vac	2000Vac	60s, Current not exceeding 5mA.
Dielectric Strength (Output-Ground)	2200Vac	2200Vac	2200Vac	60s, Current not exceeding 5mA.
Dielectric Strength (Input-Dim)	3750Vac	3750Vac	2000Vac	60s, Current not exceeding 5mA.
Grounding Resistance	0.1Ω(Max)			25°C±10°C Ambient Temperature, pass 25A Current, 60s. UL Standard 30A, 2 minutes.
Insulation Resistance	10MΩ(Min)			Input-PE, Output-PE, 500Vdc/60s/25°C/70%RH.

Safety Compliance

Safety Category	Standards	Approved	Notes
CCC	GB/T 19510.213-2023, GB/T 19510.1-2023		
CE	EN61347-1, EN61347-2-13, EN62493	√	
ENEC	EN61347-1, EN61347-2-13, EN62384	√	
CB	IEC61347-1, IEC61347-2-13	√	
BIS	IS 15885(PART 2/SEC 13)		
UL	UL 8750	√	
CUL	CSA C22.2 No.250.13	√	
KC	K61347-1, K61347-2-13		
PSE	J61347-1, J61347-2-13		
SAA	AS/NZS IEC 61347.2.13, AS/NZS 61347.1		


EMC Compliance

EMC Category	Standards	Approved	Notes
CCC	GB/T 17743, GB 17625.1		
CE	EN 55015	√	
CE	EN 61000-3-2, EN 61000-3-3	√	
CE	EN61000-4-2,3,4,5,6,11	√	
CE	EN 61547	√	
KC	K61547		
KC	K00015		
PSE	J55015		
FCC	FCC part 15	√	
Surge impulse immunity	ANSI/C82.77-5-2017	√	Meet 6KV / 6KV (2Ω)
	IEC/EN 61000-4-5	√	
Ringing wave	IEC/EN 61000-4-12	√	
	ANSI/IEEE C62.41.2	√	Meet 6KV / 6KV (2Ω)

RoHS


Our products comply with RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU.

Inrush Current

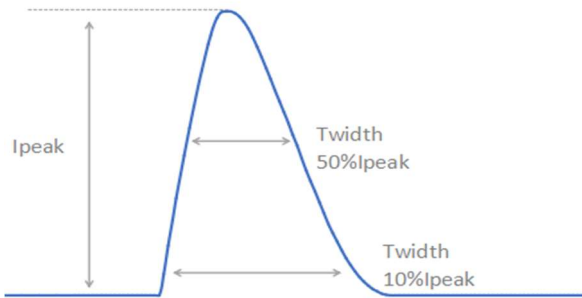


Vin	Ipeak	T(@10% of Ipeak)	T(@50% of Ipeak)
220Vac	6.03A	3.26ms	2.09ms
277Vac	7.35A	3.30ms	2.19ms
347Vac	9.45A	3.22ms	2.10ms
400Vac	11.04A	3.34ms	2.07ms
480Vac	13.38A	3.31ms	2.07ms

Output Voltage vs. Output Current

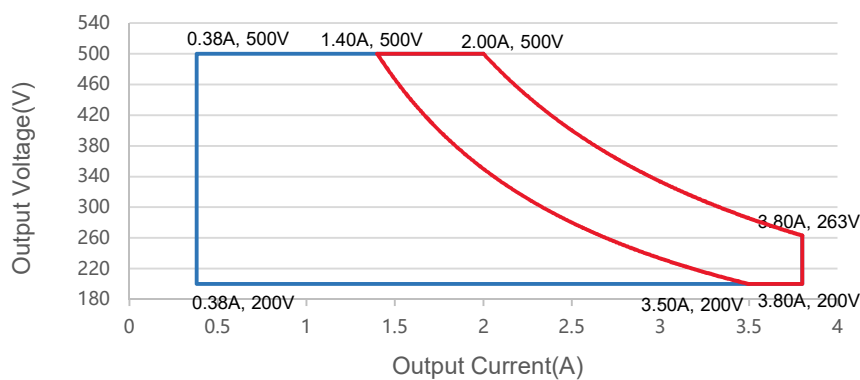


Red curve: good performance area


Output Power vs. Input Voltage

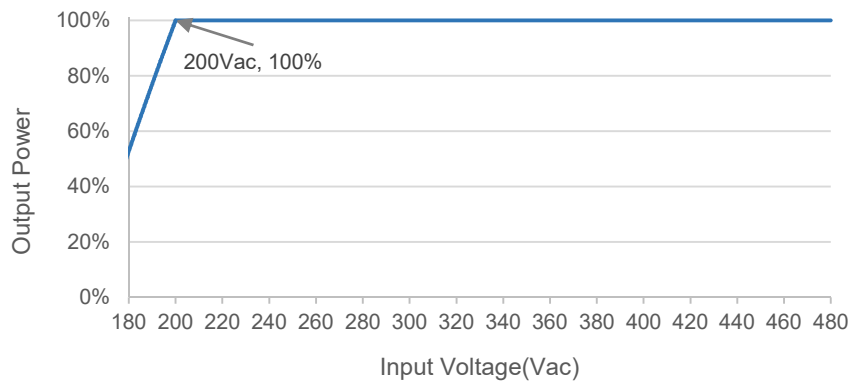


Efficiency vs. Load

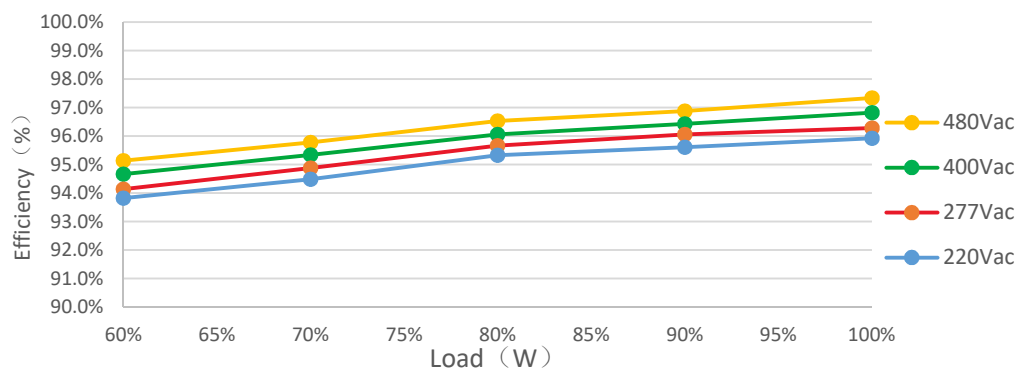


PF vs. Load

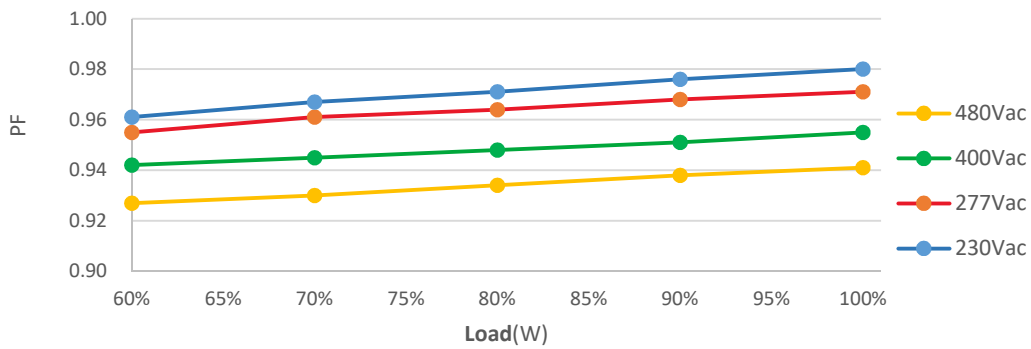


THD vs. Load

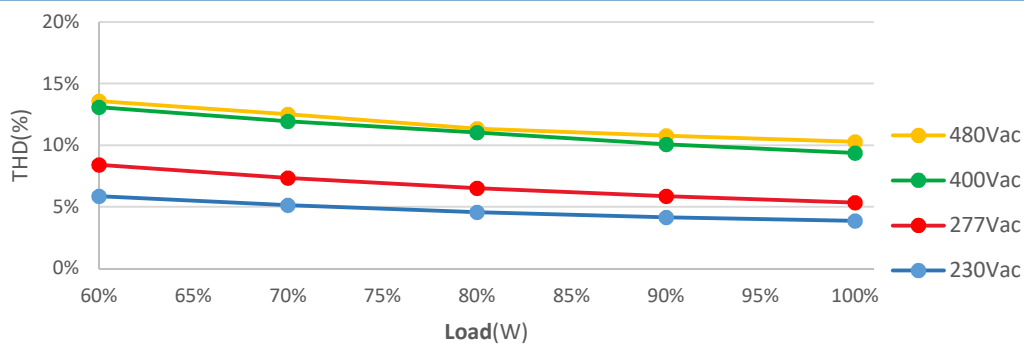


Output Power vs. Case Temperature

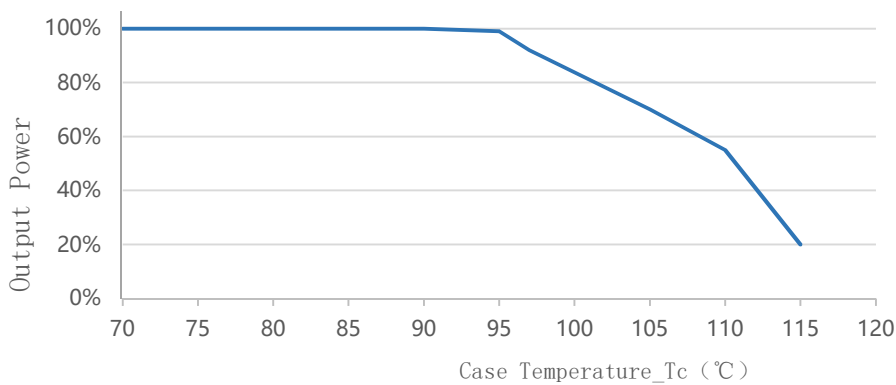

Lifetime vs. Case Temperature

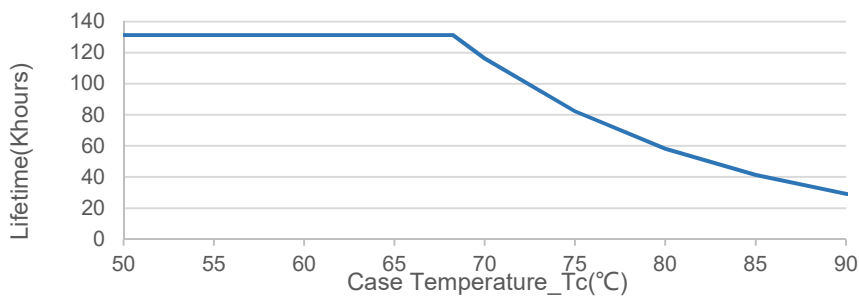


DMX Dimming Curve

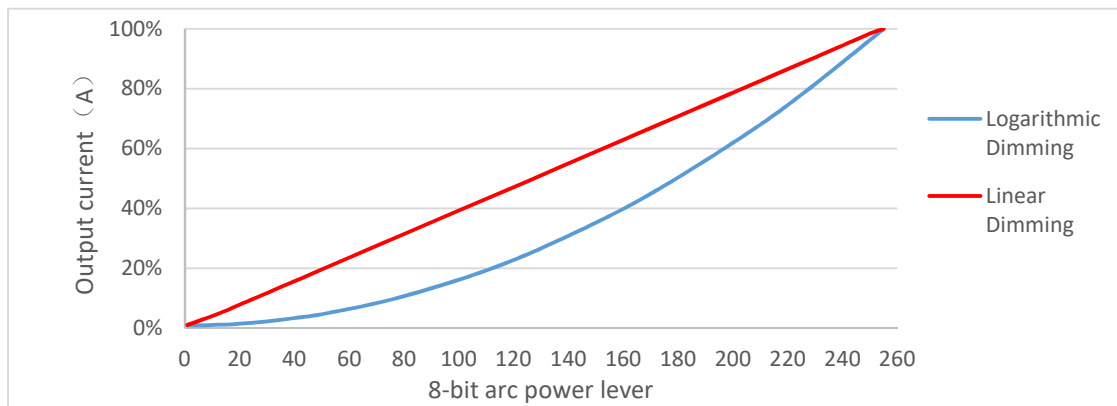

Off-line Programming


Programming mode 1 :

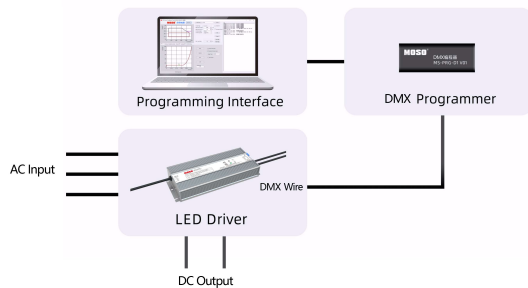

Instructions of DMX programmer:

1. Requires power supply for programming
2. Programming is carried out using the company's standard DMX power supply software 'ConfigureTool.exe'
3. For detailed operational instructions, please refer to the DMX Power Supply Programming Guide


Programming mode 2

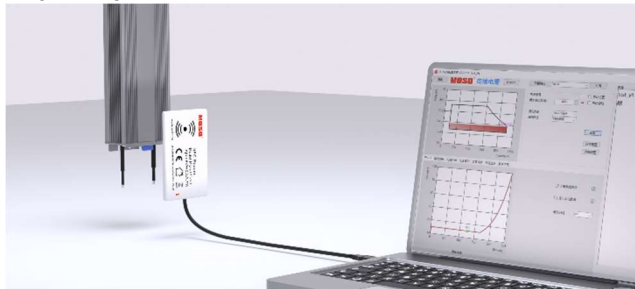

Instructions of NFC programmer:

1. The driver does not need to be powered on during the programming process.
2. Please refer to Programming Instruction Manual details.
3. Applicable to FEIG programmer: ISC PRH101 and CPR30-USB.

Mechanical Outline

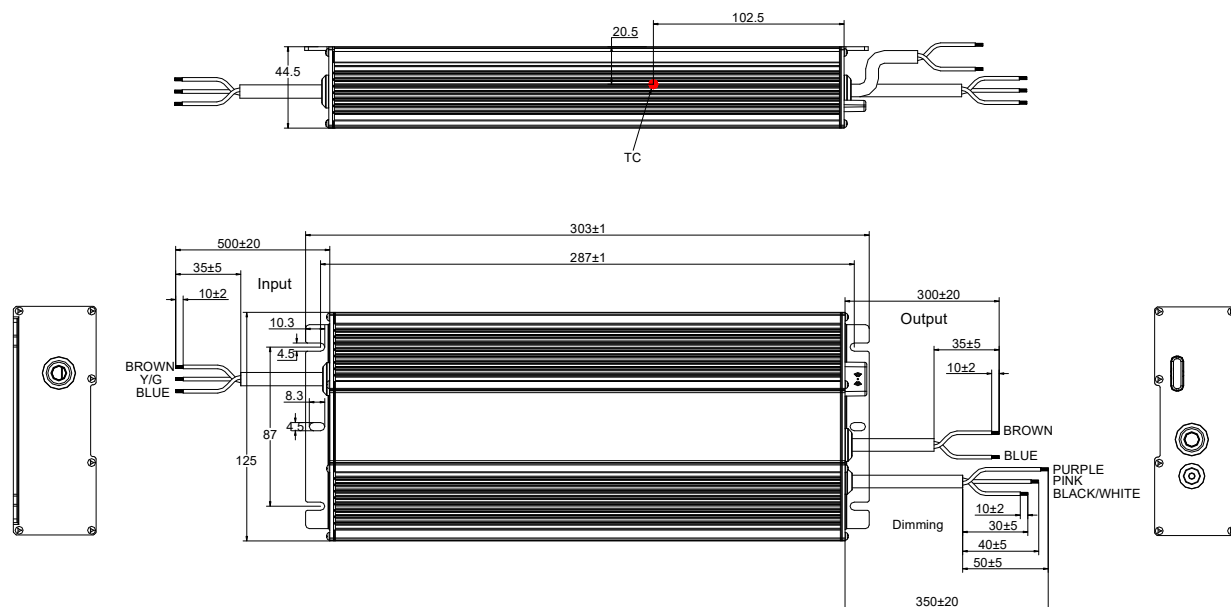

Connections

Wire	Recommended wire Specification	Note
Input	SOW 17AWG*3C □9.5±0.3mm L=500±20mm	CCC+CE+UL
Output	SOW 17AWG*2C ∅9.2±0.3mm L=300±20mm	CCC+CE+UL
Dimming	UL 21996 22AWG*3C ∅5.0±0.2mm L=350±20mm	UL

Label

INPUT L BROWN G Y/G N BLUE		MOSO® N8H-1K0R500 LED DRIVER CC mode U_{out} =600V~ <table><tr><td>INPUT</td><td>200-400V/480V~ 50/60Hz, 6.0A Max. PF: 0.9C-0.95, 1080W 200-400V~ for EU Certification range 200-480V~ for cUL Certification range</td></tr><tr><td>OUTPUT</td><td>200-500V~ 0.38-3.8A, Max. Power: 1000W</td></tr><tr><td>t_a: 90°C</td><td>t_a: 45°C Input: 200-277V~ t_a: 50°C Input: 277-400V/480V~</td></tr></table>	INPUT	200-400V/480V~ 50/60Hz, 6.0A Max. PF: 0.9C-0.95, 1080W 200-400V~ for EU Certification range 200-480V~ for cUL Certification range	OUTPUT	200-500V~ 0.38-3.8A, Max. Power: 1000W	t _a : 90°C	t _a : 45°C Input: 200-277V~ t _a : 50°C Input: 277-400V/480V~	CE UL IP67 110 RoHS FC MADE IN CHINA For LED module only Suitable for Dry, Damp and Wet locations SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD No. 1061, Songbai Road, Xili Town, Nanshan District, Shenzhen, CHINA	OUTPUT BROWN LED + BLUE LED - PURPLE DMXA PINK DMXB BLACK/WHITE COM Integrated SPD
INPUT	200-400V/480V~ 50/60Hz, 6.0A Max. PF: 0.9C-0.95, 1080W 200-400V~ for EU Certification range 200-480V~ for cUL Certification range									
OUTPUT	200-500V~ 0.38-3.8A, Max. Power: 1000W									
t _a : 90°C	t _a : 45°C Input: 200-277V~ t _a : 50°C Input: 277-400V/480V~									

Version

A.1	First release	2025-10-25

Specification for Approval

Product Name: 1000W Non-isolate LED Driver

Product Model: N8H-1K0R500

Rev : A.1

Address: XiLi Songbai Road 1061, Nanshan District, Shenzhen City, Guangdong, China

Tel: 0755-27657000

FAX: 755-27657908

E-mail: info@mosopower.com

Web Site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By

Specification for Approval

Product Name: 1000W Non-isolate LED Driver

Product Model: N8H-1K0R500

Rev: A.1

CUSTOMER AUTHORIZED SIGNATURE		
Tested By	Checked By	Approved By
(Company seal)Return one copy to MOSO with approved signature and company seal.		

Address: XiLi Songbai Road 1061, Nanshan District, Shenzhen City, Guangdong, China

Tel: 0755-27657000

FAX: 755-27657908

E-mail: info@mosopower.com

Web Site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By