


Description

The X7E series is outdoor LED driver that operates in constant current with high PF value, input voltage range 90~305Vac model, the X7E series also provide multiple isolated dimming controls, Dim-to-Off. It also helps clients to improve the management of logistics and stock. The compact metal case and high efficiency enable the driver to operate with high reliability. Overall protection is provided against lightning surge, output over voltage, short circuit and over temperature to ensure low failure rate.

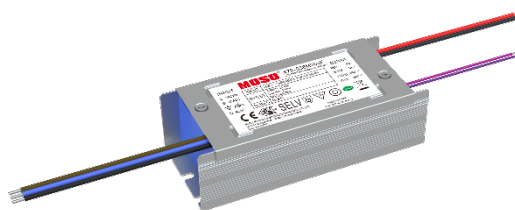

Product Features

- Universal input voltage: 90~305Vac;
- Isolate constant current design;
- The output current is adjustable;
- 3-in-1 dimmable: 0~10Vdc / PWM/ Timer dimming;
- Output and Dimming signal Isolating;
- High surge protection: 4KV line-line, 6KV line-earth(Class I);
- Suitable for luminaires with protection Class I & Class II;
- Protections: Output SCP / OVP / OTP;
- Suitable for dry / damp / wet locations;
- 5 years warranty.

Application

Road and street lighting
 Tunnel lighting
 Area and flood lighting
 High-bay lighting

Models

Model Number	Input Voltage Range (Vac)	MAX Output Power (W)	Output Voltage Range (Vdc)	Full Power Output Current Range (A)	Default Current(A)	Eff. (Typ.)	PF(Typ.)	THD(Typ.)
X7E-026M058F	90~305	26	28-58	0.45~0.62	0.5	88%	0.97	10%

NOTES:

[1]. M means 0-10V/PWM dimming, V means non-dimmable, adjustable output current with potentiometer.

[2]. All specifications are measured at 25

°C ambient temperature, input voltage 230Vac, and the typ

Input Specifications

Parameter	Min	Typ.	Max	Notes
Input Voltage Range	90Vac	100~277Vac	305Vac	
Input Frequency AC	47Hz	50/60Hz	63Hz	
Max Input Current	-	-	0.35A	100Vac & 100% load
Max Input Power	-	-	35W	100Vac & 100% load
Leakage Current	-	-	0.70mA	IEC 60598-1;240Vac/60Hz
Inrush Current	-	-	30A	220Vac, 100% load
Power Factor (PF)	0.95	0.97	-	220-240Vac, 50-60Hz, 70%-100% load
	0.90	-	-	100-277Vac, 50-60Hz, 70%-100% load
Total Harmonic Distortion (THD)	-	10%	15%	100-277Vac, 50-60Hz, 70%-100% load
MCB(B16)	-	35	-	230Vac; 100% load

Output Specifications

Parameter	Min	Typ.	Max	Notes
Output Voltage Range	28Vdc	-	58Vdc	The full power cannot be lower than 42Vdc
Open Circuit Voltage	-	-	80Vdc	
Output Current Range	0.062A	-	0.62A	Adjustable Output Current with programmer
Full Power Current Range	0.45A	-	0.62A	
Current Accuracy	-8% Iset	-	+8% Iset	
Total Output Current Ripple (pk-pk)	-	-	200%	20MHz BW full load & LED load the LED load ripple is slightly different for different leds
Startup Overshoot Current	-	-	10%	220-240Vac full load condition, LED load
Line Regulation	-8%	-	+8%	25°C±10°C ambient temperature, input changes from 100Vac to 277Vac
Load Regulation	-5%	-	+5%	Load varies from 60% to 100% with 230Vac Input at 25°C ±10°C ambient temperature
Turn-on Delay Time	-	-	3s	120Vac, 100% load
	-	-	1s	230Vac, 100% load

General Specifications

parameter	Min	Typ.	Max	Notes
Efficiency@120Vac	84.5%	86%	-	100% load, 25°C ambient temperature
Efficiency@230Vac	86.5%	88%	-	100% load, 25°C ambient temperature
Efficiency@277Vac	86.5%	88%	-	100% load, 25°C ambient temperature
Mean Time Between Failure	-	200Khours	-	25°C±10°C ambient temperature, 230Vac, 80% load condition (MIL-HDBK-217/SR-332)
Lifetime	-	50Khours	-	230Vac & 100% load, T _c =75°C, reference lifetime vs. case temperature curve
Operating Temperature T _a	-40 °C	-	+60°C	Output Power vs. Ambient Temperature curve
Operating T _c for Safety T _{c_s}	-40 °C	-	+85°C	
Operating T _c for Warranty T _{c_w}	-40 °C	-	+75°C	5-year warranty shell temperature, humidity:10% to 90% RH, Non-condensing
Storage Temperature T _a	-40 °C	-	+85 °C	Humidity:5% to 95% RH
Altitude	-60m	-	4000m	
Over Temperature Protection T _c	85°C	95°C	105°C	Decreases output current, returning to normal after over temperature is removed.
Short Circuit Protection	-	-	-	Constant current mode. The output shall return to normal when the fault condition is removed.
Dimensions (L*W*H)	102*50.3*34mm			
Net Weight	270±50g/PCS			
Package (L*W*H)	500*310*125mm; 20PCS/Ctn. ;Gross Weight: 7Kg			

Dimming

Parameter	Min	Typ.	Max	Notes
Absolute Maximum Voltage	-	10V	15V	On the V _{dim} (+) Pin
Source Current on V _{dim} (+)Pin	-	200uA	400uA	
Dimming Range	10% I _{set}	-	100% I _{set}	I _{set} is set to the full power range
Suggest Dimming Input 0-10V	0V	-	10V	
Turn-on Voltage	0.7V	-	1.0V	Only applicable to Dim-to-off
Turn-off Voltage	0.4V	-	0.7V	Only applicable to Dim-to-off
PWM in High Level	9.7V	-	10.3V	
PWM in Low Level	0V	-	0.3V	
PWM in Frequency Range	300Hz	-	2KHz	
PWM in Duty Cycle	1%	-	99%	
Turn-on Duty Cycle	7%	-	10%	Only applicable to Dim-to-off
Turn-Off Duty Cycle	4%	-	7%	Only applicable to Dim-to-off
Timer dimming	-	-	-	3 types, which is set by software
Output lumen compensation	-	-	-	Constant lumen output function

Safety Specification

Parameter	Min	Typ.(Class I/II)	Max	Notes
Dielectric Strength (Input-Output)	-	3750Vac	-	60S, Current not exceeding 5mA
Dielectric Strength (Input- Ground /Case)	-	1560/3750Vac	-	60S, Current not exceeding 5mA
Dielectric Strength (Output- Ground /Case)	-	1160Vac	-	60S, Current not exceeding 5mA
Dielectric Strength (Input-Dimming)	-	3750Vac	-	60S, Current not exceeding 5mA
Dielectric Strength (Dimming- Ground /Case)	-	500Vac	-	60S, Current not exceeding 5mA
Insulation Resistance	10MΩ	-	-	Input-Output, Input-PE/Case, Output-PE/Case, 500Vdc/60S/25°C

Safety Compliance

Safety Category	Standards	Approved	Notes
CCC	GB/T 19510.213, GB/T 19510.1		
CE	EN61347-1, EN61347-2-13, EN62493	√	
ENEC	EN61347-1, EN61347-2-13, EN62384	√	
CB	IEC61347-1, IEC61347-2-13	√	
BIS	IS 15885(PART 2/SEC 13)		
UL	UL 8750		
CUL	CSA C22.2 No.250.13		
KC	K61347-1, K61347-2-13		
PSE	J61347-1, J61347-2-13		
SAA	AS 61347.2.13, AS/NZS 61347.1		
EAC	ГОСТ Р МЭК 61347-1 ГОСТ IEC 61347-2-13		


EMC Compliance

EMC Category	Standards	Approved	Notes
CCC	GB/T 17743, GB 17625.1		
CE	EN 55015	√	
CE	EN 61000-3-2, EN 61000-3-3	√	
CE	EN61000-4-2,3,4,5,6,11	√	
CE	EN 61547	√	
KC	K61547		
KC	K00015		
PSE	J55015		
FCC	FCC part 15		
Surge Shock Immunity	EN61000-4-5		
Ringing Wave			
EAC	ГОСТ IEC 62493, СТБ EH 55015 ГОСТ IEC 61547		
EAC	ГОСТ 30804.3.2 (IEC 61000-3-2) ГОСТ 30804.3.3 (IEC 61000-3-3)		

RoHS


Our products comply with reference to RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU.

Inrush Current

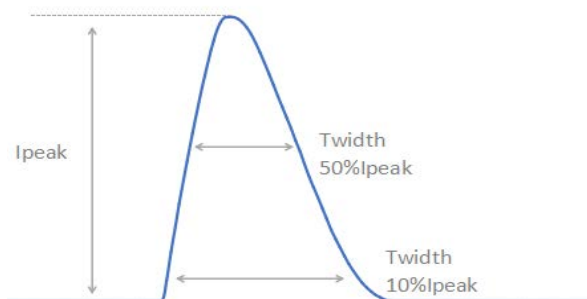


Vin	Ipeak	T(@10% of Ipeak)	T(@50% of Ipeak)
230Vac	17.7A	304us	156us

Output Voltage vs. Output Current

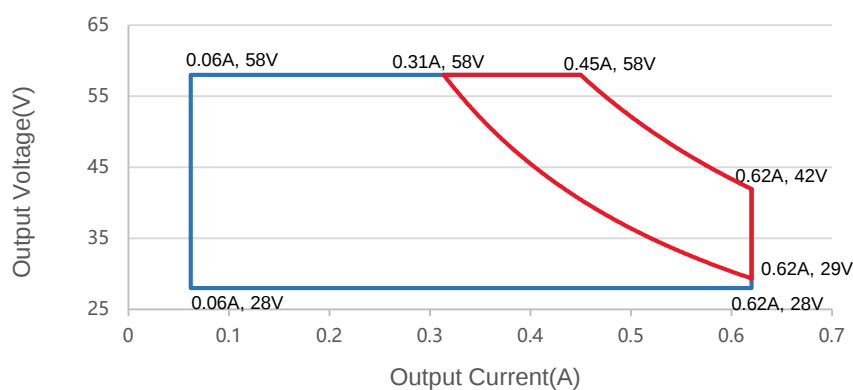


Red curve: good performance area


Output Power vs. Input Voltage

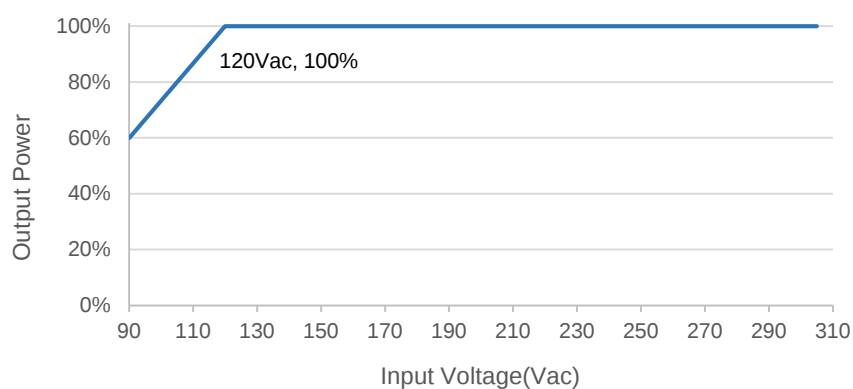


Efficient vs. Load

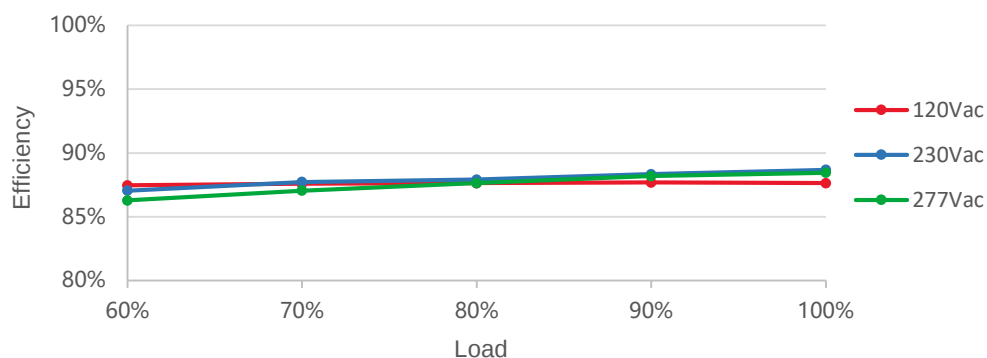


PF vs. Load

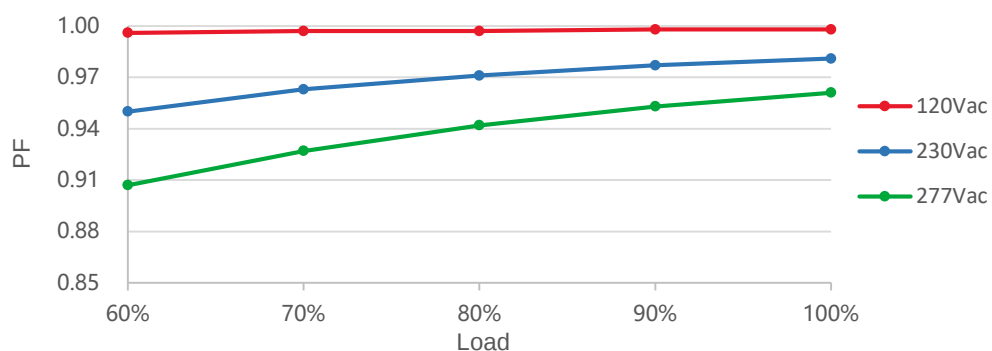


THD vs. Load

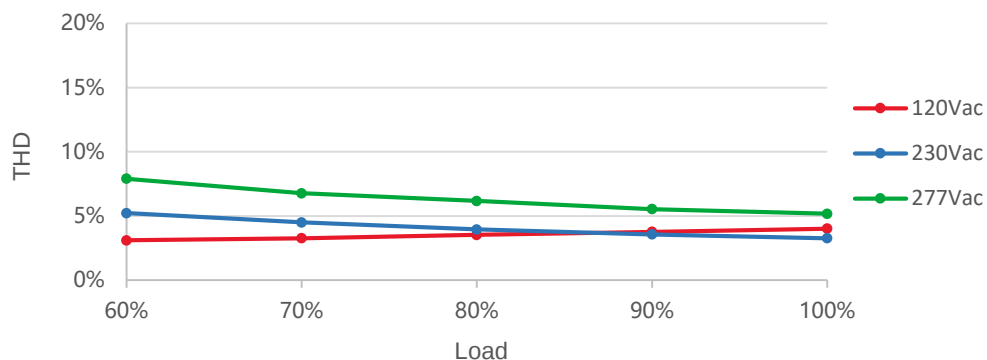


Output Power vs. Ambient Temperature

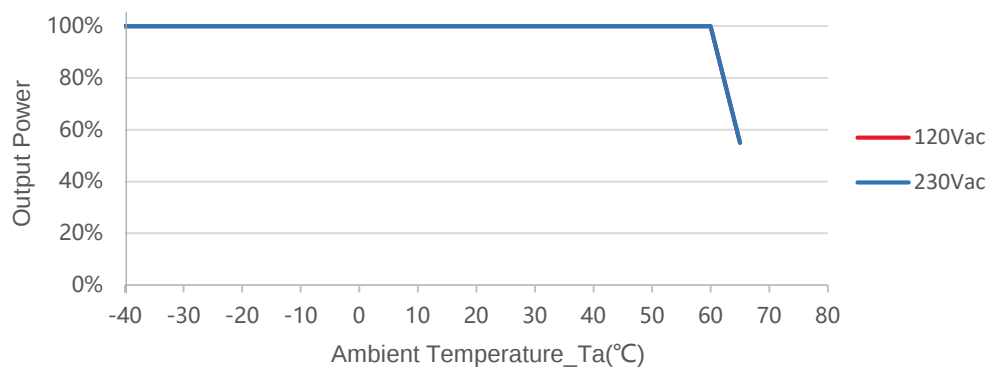

Lifetime vs. Case Temperature

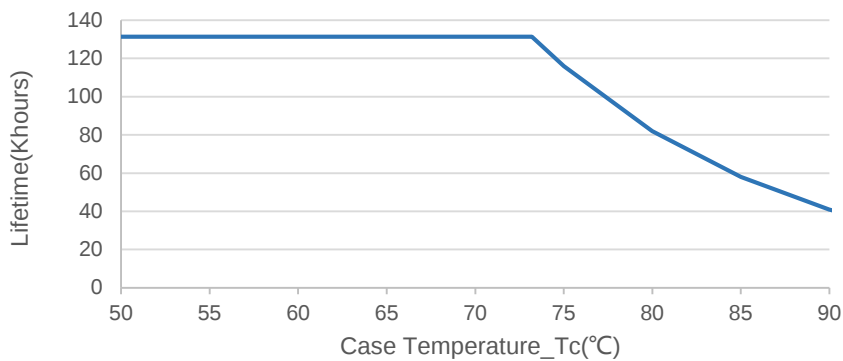

0-10V/PWM Dimming

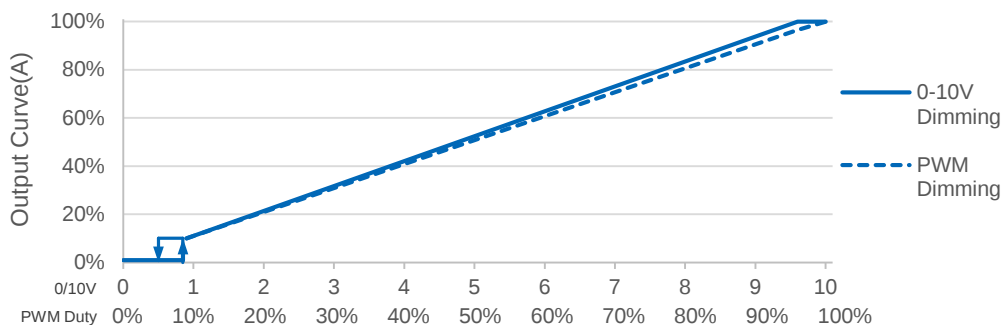

Note: Afterglow may appear after switching off dimming due to the difference of lamp panel. Thus, lighting fixture grounding test is suggested.

Off-line Programming

User-friendly connection of programming without necessary to power on device (suitable for X6, XCP, X6I, X7E Series).

Programming mode 1



Visual Intelligent Programming

1. Set the output parameters through the control signal line 0-3.3V/0-5V/0-9V/0-10V optional.
2. Timer dimming. Set the timer control function, support up to 7 segments;
3. Set output CLO;
4. Read the recorded system parameters; Record the working time working temperature, and software version information of the LED driver.
5. Configure the driving parameters. After setting is completed, then click the configured parameters to complete programming.
6. Download it to the offline programmer.


Programming mode 2



Instructions of one touch programmer:

1. Open the software interface and download the program to the offline programmer;
2. Connect the dimming wire with the programmer, press the programmer button, the programmer will give you a subtle reminder "(Beep)" to tell you the installation completed.

Mechanical Outline

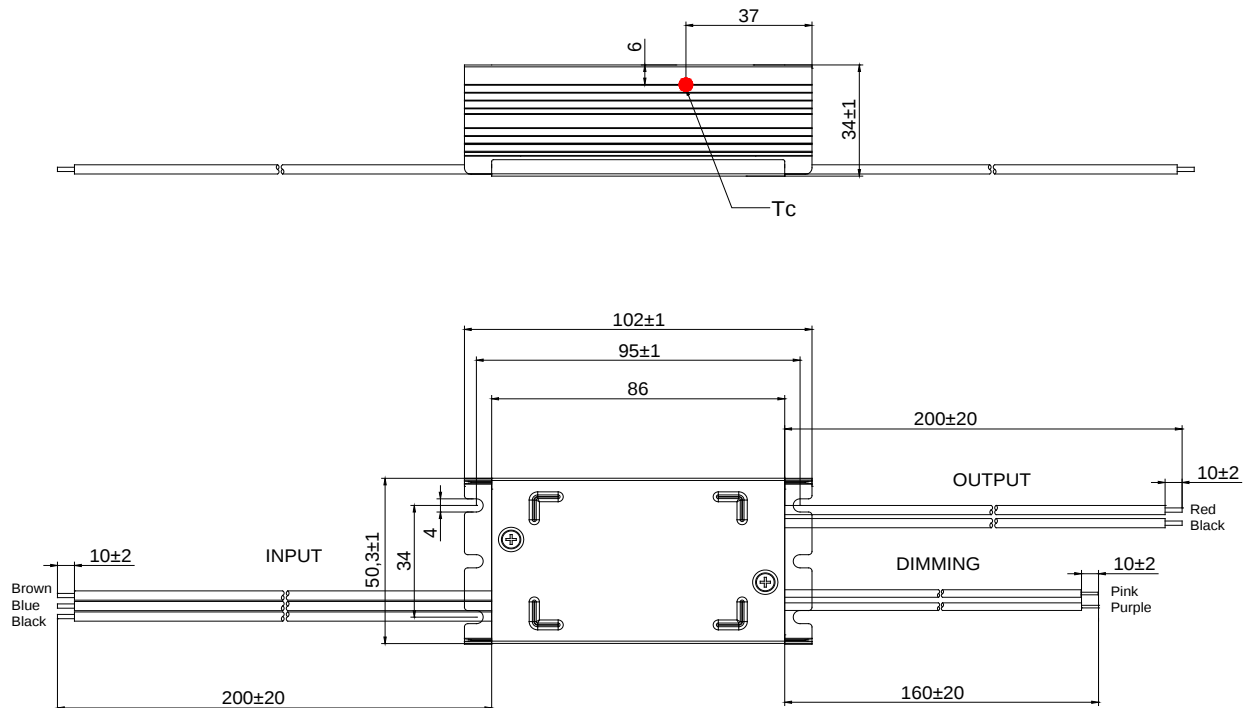

Specification

Input	UL 1672 18AWG L=200±20mm Tin-dip length 10±2mm L: Brown, N: Blue, G: Black	
Output	UL 1672 18AWG L=200±20mm Tin-dip length 10±2mm LED+: Red, LED-: Black	
Dimming	UL 1015 22AWG L=160±20mm Tin-dip length 10±2mm DIM+: Purple, DIM-: Pink,	

Label

INPUT

L BROWN

G BLACK

N BLUE

MOSO[®] X7E-026M058F

LED DRIVER (Constant current type)

OUTPUT

RED Vo +

BLACK Vo -

PURPLE DIM "+"

PINK DIM "-"

INPUT	100-277V~50/60Hz, 0.35A Max. PF: 0.5C-0.96, Max. 35W
OUTPUT	28-58V~ 0.31-0.62A
	Uout Max: 80V~
	Max. Power: 26W
tc: 85°C	ta: 60°C

CE **EN 25** **SELV** **110**

SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD

No.1061, Songbai Road, Xili Town, Nanshan District, Shenzhen, CHINA

MADE IN CHINA

For LED module only

RoHS

Version

A.1	First release	2025-10-16

Specification for Approval

Product Name: 26W LED Driver

Product Model: X7E-026M058F

Rev: A.1

Address: XiLi Songbai Road 1061, Nanshan District, Shenzhen City, Guangdong, China

Tel: 0755-27657000

FAX: 755-27657908

E-mail: info@mosopower.com

Web Site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By

Specification for Approval

Product Name: 26W LED Driver

Product Model: X7E-026M058F

Rev: A.1

CUSTOMER AUTHORIZED SIGNATURE		
Tested By	Checked By	Approved By
(Company seal)Return one copy to MOSO with approved signature and company seal.		

Address:XiLi Songbai Road 1061, Nanshan District, Shenzhen City, Guangdong, China

Tel: 0755-27657000

FAX: 755-27657908

E-mail:info@mosopower.com

Web Site:http://www.mosopower.com

Prepared By	Checked By	Approved By