

## Specification for Approval

Product Name: 200W Linear Non-isolated Driver

Product Model: N7C-200M260A12

Rev: B.2

Address: XILiSongbai Road 1061, Nanshan District, Shenzhen City, Guangdong, China

Tel: 0755-27657000

FAX: 755-27657908

E-mail: [info@mosopower.com](mailto:info@mosopower.com)

Web Site: <http://www.mosopower.com>

| Prepared By | Checked By | Approved By |
|-------------|------------|-------------|
|             |            |             |

## Specification for Approval

Product Name: 200W Linear Non-isolated Driver

Product Model: N7C-200M260A12

Rev: B.2

|   |                   |                    |
|---|-------------------|--------------------|
| <b>CUSTOMER AUTHORIZED SIGNATURE</b>  |                   |                    |
| <b>Tested By</b>  | <b>Checked By</b> | <b>Approved By</b> |
|   |                   |                    |
| (Company seal)Return one copy to MOSO with approved signature and company seal. |                   |                    |

Address:XiLiSongbai Road 1061, Nanshan District, Shenzhen City, Guangdong, China

Tel: 0755-27657000

FAX: 755-27657908

E-mail:[info@mosopower.com](mailto:info@mosopower.com)

Web Site:<http://www.mosopower.com>

|                    |                   |                    |
|--------------------|-------------------|--------------------|
| <b>Prepared By</b> | <b>Checked By</b> | <b>Approved By</b> |
|                    |                   |                    |

## Description

The N7C series is specifically designed for industrial lighting applications, non-isolated design, operating in constant current with high power factor and a universal input voltage range of 108–380Vac. With 0-10V/PWM/ resistance dimming. The compact housing and high efficiency allow the drivers to operate with high reliability, while featuring input surge, output over voltage, short circuit and over temperature protection.



## Product Features

- n Universal input voltage: 108–380Vac;
- n Rated Input voltage: 120–347Vac;
- n Constant current design, Efficiency up to 95%;
- n 3-in-1 dimmable: 0–10V / PWM / Resistor;
- n Dim-to-off without afterglow (optional);
- n High surge protection: DM: 6KV, CM: 6KV;
- n 12V/0.2A auxiliary power supply;
- n Output and Dimming Signal Isolating;
- n Protections: SCP / OVP / OTP;
- n 5 years warranty;

## Application

Linear high bay light  
 Flood light  
 Wall Pack light  
 Shoebox light

## Models

| Model Number   | Input Voltage Range (Vac) | Max Output Power (W) | Output Voltage Range (Vdc) | Output Current Adjustable Range (A) | Default Current(A) | Eff. (Typ.) | PF(Typ.) | THD(Typ.) |
|----------------|---------------------------|----------------------|----------------------------|-------------------------------------|--------------------|-------------|----------|-----------|
| N7C-200M260A12 | 108–380                   | 200                  | 180–260                    | 0.65–0.93                           | 0.83               | 95%         | 0.97     | 10%       |

Notes:

[1]. All specifications are measured at 25°C ambient temperature, input voltage 277Vac, and the typical value tested at full load, if no specific note.

## Input Specifications

| Parameter                       | Min    | Typ.    | Max     | Notes   |
|---------------------------------|--------|---------|---------|---|
| Input Voltage Range             | 108Vac | -       | 380Vac  |   |
| Rated Input voltage             | 120Vac | -       | 347Vac  | Refer to Output Power vs. Input Voltage curve |
| Input Frequency AC              | 47Hz   | 50/60Hz | 63Hz    |   |
| Max Input Current               | -      | -       | 2.4A    | 120Vac & 100% load                            |
| Max Input Power                 | -      | -       | 230W    | 120Vac & 100% load                            |
| Leakage Current                 | -      | -       | 0.75mIU | UL 8750; 347Vac/60Hz                          |
| Inrush Current                  | -      | -       | 55A     | 120Vac, 100% load                             |
| Inrush Current                  |        |         | 100A    | 220Vac, 100% load                             |
| Inrush Current                  |        |         | 140A    | 347Vac, 100% load                             |
| Power Factor (PF)               | 0.90   | 0.97    |         | 120-347Vac , 50/60Hz , 80%-100% load          |
| Total Harmonic Distortion (THD) | -      | 10%     | 20%     | 120-277Vac , 50/60Hz , 80%-100% load          |
| MCB(B16)                        | -      | 9       | -       | 220Vac; 100%load                              |

## Output Specifications

| Parameter                   | Min    | Typ. | Max    | Notes  |
|-----------------------------|--------|------|--------|--|
| Output Voltage Range        | 180Vdc | -    | 260Vdc |  |
| Open Circuit Voltage        | -      | -    | 310Vdc |  |
| Output Current Range        | 0.65A  | -    | 0.93A  | Adjustable output current with potentiometer   |
| Full Power Current Range    | 0.77A  | -    | 0.93A  | $P=U \cdot I=200W$ , 100%load  |
| Current Accuracy            | -8%    | -    | +8%    |  |
| Total Output Current Ripple | -      | 10%  | 15%    | 20MHz BW full load & LED load the LED load ripple is slightly different for different LEDs |
| Startup Overshoot Current   | -      |      | 10%    | 120-347Vac full load condition, LED load   |
| Line Regulation             | -5%    | -    | +5%    | 25°C±10°C ambient temperature, input changes from 120Vac to 347Vac                         |
| Load Regulation             | -5%    | -    | +5%    | Load varies from 70% to 100% with 120-347Vac Input at 25°C±10°C ambient temperature        |
| Turn-on Delay Time          | -      | -    | 1s     | 120Vac, 100% load  |
| Turn-on Delay Time          | -      | -    | 1s     | 277Vac, 100% load  |
| Turn-on Delay Time          | -      | -    | 1s     | 347Vac, 100% load  |

## General Specifications

| Parameter                      | Min   | Typ.      | Max   | Notes   |
|--------------------------------|---|-----------|-------|---|
| Efficiency@120Vac              | 91%   | 92%       | -     | 100% load, No load of auxiliary source  |
| Efficiency@277Vac              | 92%   | 93%       | -     | 100% load, No load of auxiliary source  |
| Efficiency@347Vac              | 93%   | 95%       | -     | 100% load, No load of auxiliary source  |
| Mean Time Between Failure      | -   | 200Khours | -     | 25°C±10°Cambient temperature , 230Vac , 80% load condition (MIL-HDBK-217/SR-332)              |
| Lifetime                       | -   | 50Khours  | -     | 230Vac & 100% load , Tc 80°C , refer to lifetime vs. case temperature curve                   |
| Operating Tc for Safety Tc_s   | -40°C   | -         | +90°C |   |
| Operating Tc for Warranty Tc_w | -40°C   | -         | +80°C | 5-year warranty shell temperature, humidity:10% to 90% RH, Non-condensing                     |
| Storage Temperature Ta         | -40°C   | -         | +85°C | Humidity:5% to 95% RH, Non-condensing   |
| Altitude                       | -60m  | -         | 4000m |   |
| Over Temperature Protection Tc | 90°C  | 95°C      | 100°C | Decreases output current, returning to normal after over temperature is removed.              |
| Short Circuit Protection       | -   | -         | 15W   | Constant current mode. The output shall return to normal when the fault condition is removed. |
| Dimensions (L*W*H)             | 192*53*34mm                                   |           |       |   |
| Net Weight                     | 740±50g/PCS                                   |           |       |   |
| Package (L*W*H)                | 500*310*160mm; 24PCS/Ctn., Gross Weight: 18Kg |           |       |   |

## Dimming

| Parameter                     | Min                    | Typ.  | Max                   | Notes                        |
|-------------------------------|------------------------|-------|-----------------------|------------------------------|
| Absolute Maximum Voltage      | -                      | 10V   | 15V                   | On the Vdim (+) Pin          |
| Source Current on Vdim (+)Pin | -                      | 100uA | 200uA                 |                              |
| Dimming Range                 | 10% I <sub>o max</sub> | -     | 100% I <sub>set</sub> | I <sub>set</sub> =0.65-0.93A |
| Suggest Dimming Input 0-10V   | 0V                     | -     | 10V                   |                              |
| Turn-on Voltage               | 0.9V                   | -     | 1.3V                  |                              |
| Turn-off Voltage              | 0.6V                   | -     | 1.0V                  |                              |
| PWM in High Level             | 9.7V                   | -     | 10.3V                 |                              |
| PWM in Low Level              | 0V                     | -     | 0.3V                  |                              |
| PWM in Frequency Range        | 1KHz                   | -     | 2KHz                  |                              |
| PWM in Duty Cycle             | 1%                     | -     | 99%                   |                              |
| Turn-on Duty Cycle            | 10%                    | -     | 13%                   |                              |
| Turn-Off Duty Cycle           | 6%                     | -     | 10%                   |                              |
| Resistor Range                | 0                      | -     | 100KΩ                 |                              |

## Safety Specification

| Parameter                             | Min  | Typ.    | Max  | Notes  |
|---------------------------------------|------|---------|------|--|
| Dielectric Strength ( Input-Ground )  | -    | 1700Vac | -    | 60s , Current not exceeding 5mA                        |
| Dielectric Strength ( Input-Dimming ) | -    | 1700Vac | -    | 60s , Current not exceeding 5mA                        |
| Grounding Resistance                  | -    | -       | 0.1Ω | 25°C±10°C Ambient Temperature, pass 30A Current, 120s. |
| Insulation Resistance                 | 10MΩ | -       | -    | Input -PE, 500Vdc/60s/25°C                             |

## Safety Compliance

| Safety Category | Standards                        | Approved | Notes |
|-----------------|----------------------------------|----------|-------|
| CCC             | GB19510.1,GB19510.14             |          |       |
| CE              | EN61347-1, EN61347-2-13, EN62493 |          |       |
| ENEC            | EN61347-1, EN61347-2-13, EN62384 |          |       |
| CB              | IEC61347-1, IEC61347-2-13        |          |       |
| BIS             | IS 15885(PART 2/SEC 13)          |          |       |
| UL              | UL 8750                          | √        |       |
| CUL             | CSA C22.2 No.250.13              | √        |       |
| KC              | K61347-1, K61347-2-13            |          |       |
| PSE             | J61347-1, J61347-2-13            |          |       |
| SAA             | AS/NZS IEC 61347.2.13            |          |       |
| SAA             | AS/NZS 61347.1                   |          |       |


## EMC Compliance

| EMC Category         | Standards                  | Approved | Notes   |
|----------------------|----------------------------|----------|---------|
| CCC                  | GB/T 17743, GB 17625.1     |          |         |
| CE                   | EN 55015                   |          |         |
| CE                   | EN 61000-3-2, EN 61000-3-3 |          |         |
| CE                   | EN61000-4-2,3,4,5,6,11     |          |         |
| CE                   | EN 61547                   |          |         |
| KC                   | K61547                     |          |         |
| KC                   | K00015                     |          |         |
| PSE                  | J55015                     |          |         |
| FCC                  | FCC part 15                | √        | CLASS A |
| Surge Shock Immunity | ANSI/C82.77-5-2017         |          |         |
|                      | IEC/EN 61000-4-5           |          |         |
| Ringing Wave         | IEC/EN 61000-4-12          |          |         |
|                      | ANSI/IEEE C62.41.2         |          |         |

## RoHS


Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU.

Inrush Current

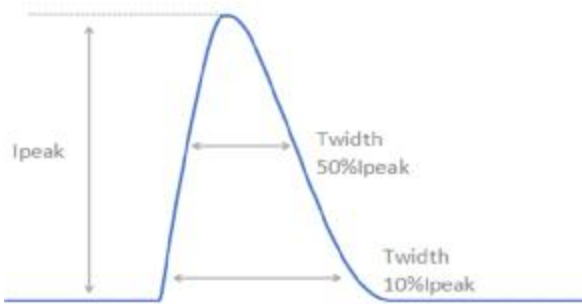


| $V_{in}$ | $I_{peak}$ | $T(@10\% \text{ of } I_{peak})$ | $T(@50\% \text{ of } I_{peak})$ |
|----------|------------|---------------------------------|---------------------------------|
| 220Vac   | 100A       | 280 $\mu$ s                     | 130 $\mu$ s                     |

Output Voltage vs. Output Current

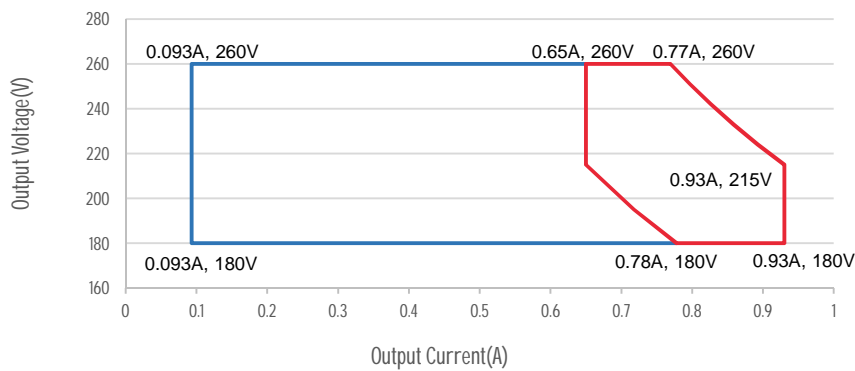


Red curve: good performance area


Output Power vs. Input Voltage

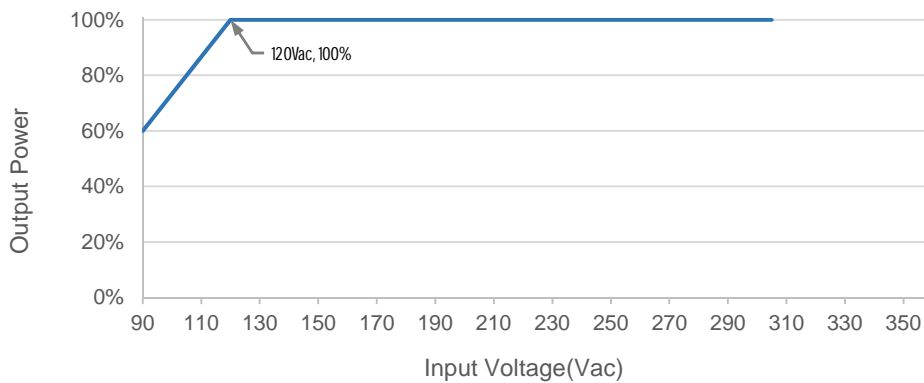


Efficiency vs. Load

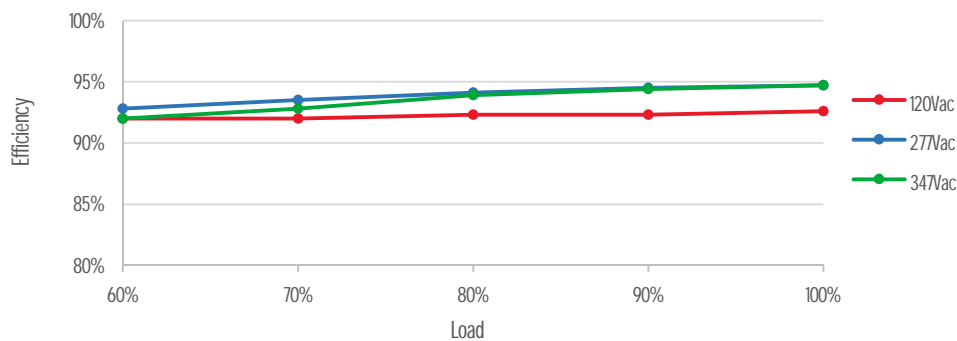


PF vs. Load

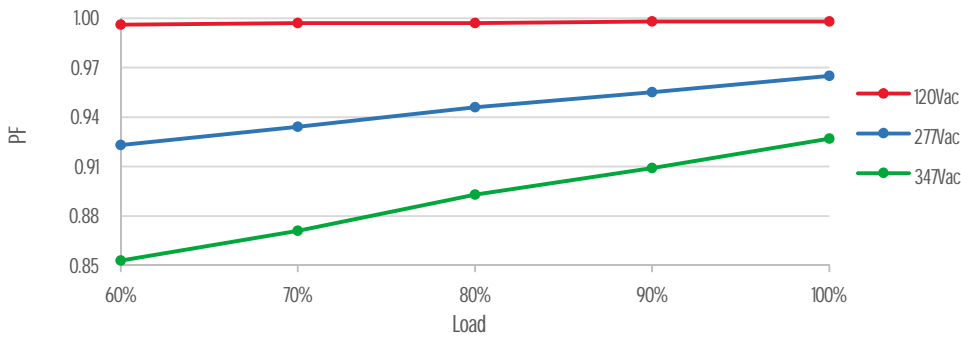


THD vs. Load

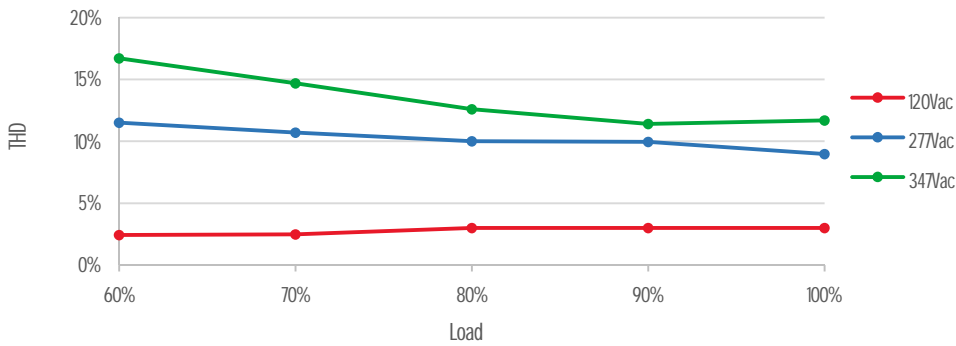


Output Power vs. Case Temperature

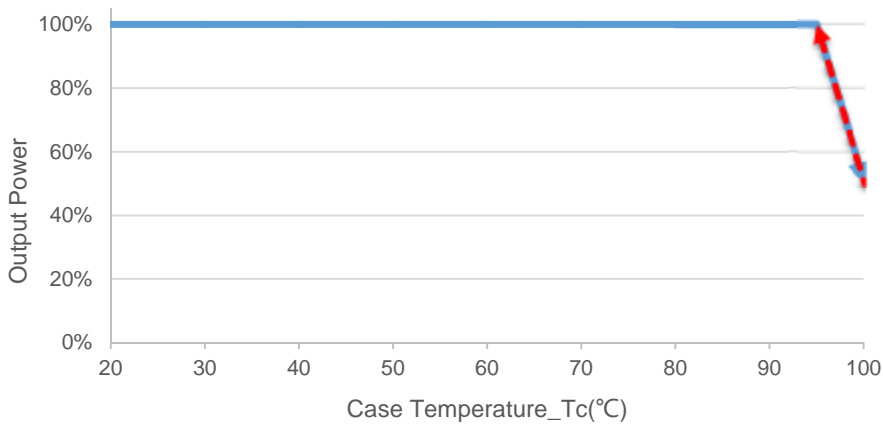


### Lifetime vs. Case Temperature

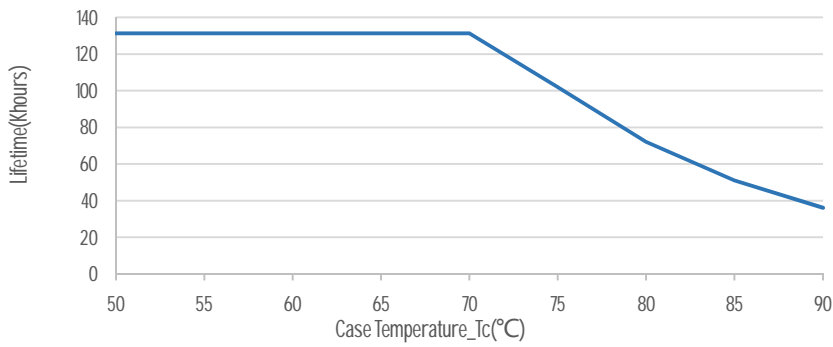

### 0-10V/PWM/Resistor Dimming

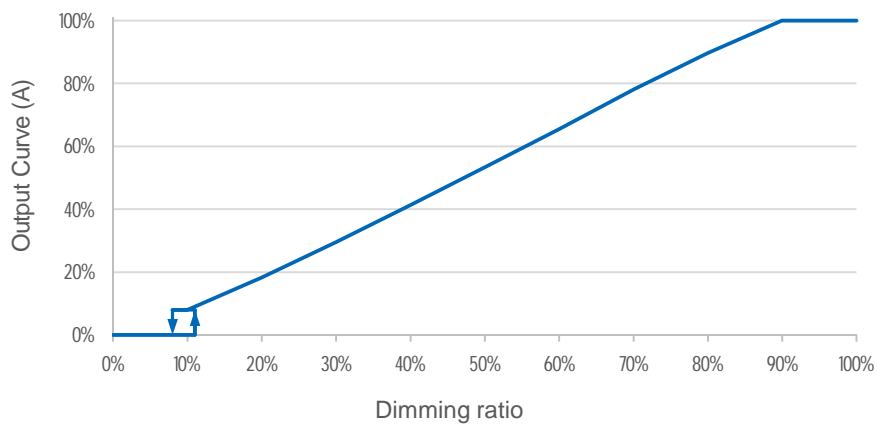

Mechanical Outline

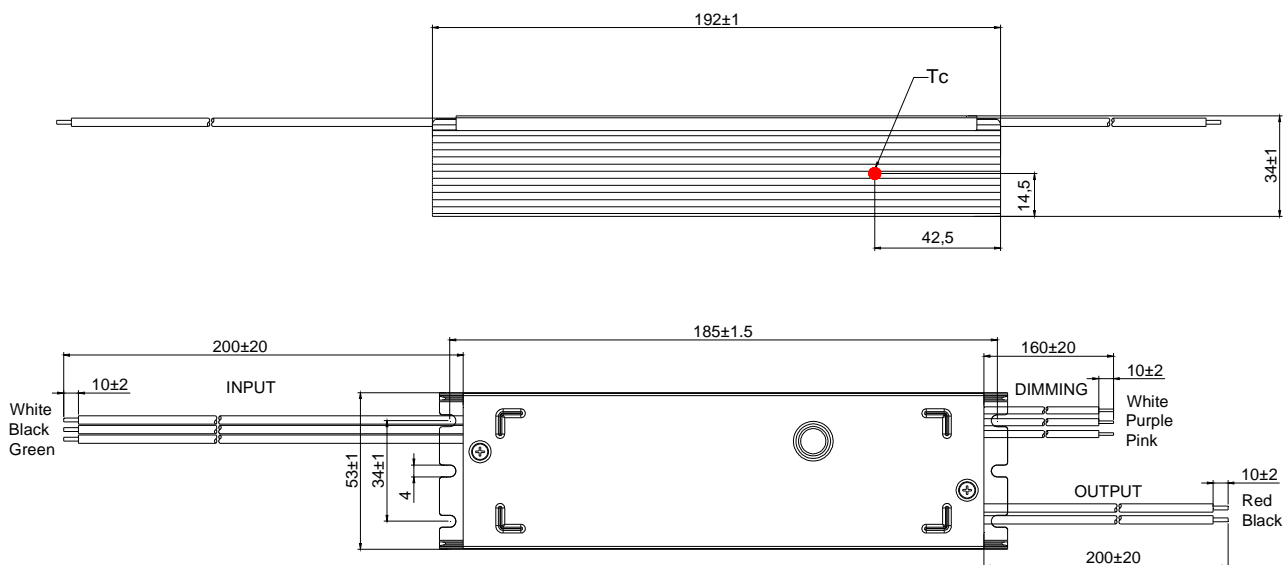

Notes:

- [1]. In order to meet the requirements of the "derating curve" and "maximum ambient temperature of 50 °C", it is necessary to add auxiliary heat dissipation devices with a recommended heat dissipation area of 380cm<sup>2</sup> and the volume is 115cm<sup>3</sup>; It is also necessary to add thermal conductive silicone grease between the heat sink and LED driver to ensure a tight fit with the auxiliary heat sink.
- [2]. The pressure resistance of LED beads and aluminum substrate should be greater than 2KVac.

Specification

|         |  |    |
|---------|--|----|
| Input   | UL 1015 18AWG L=200±20mm Tin-dip length 10±2mm | UL |
| Output  | UL 1015 18AWG L=200±20mm Tin-dip length 10±2mm | UL |
| Dimming | UL 1015 22AWG L=160±20mm Tin-dip length 10±2mm | UL |

Version

|     |               |            |
|-----|---------------|------------|
| A.1 | First release | 2024-02-29 |
| B.2 | ECL202403028  | 2024-03-13 |
|     |               |            |
|     |               |            |
|     |               |            |
|     |               |            |