

Specification for Approval

Product Name: 320W Linear Non-isolated

Product Model: N7C-320M260A12

Rev: C.2

Address:XiLiSongbai Road 1061, Nanshan District, Shenzhen City, Guangdong, China

Tel: 0755-27657000

FAX: 755-27657908

E-mail:info@mosopower.com

Web Site:http://www.mosopower.com

| Prepared By | Checked By | Approved By |
|-------------|------------|-------------|
| | | |

Specification for Approval

Product Name: 320W Linear Non-isolated Driver

Product Model: N7C-320M260A12

Rev: C.2

| | | |
|---|-------------------|--------------------|
| CUSTOMER AUTHORIZED SIGNATURE | | |
| Tested By | Checked By | Approved By |
| | | |
| (Company seal)Return one copy to MOSO with approved signature and company seal. | | |

Address:XiLiSongbai Road 1061, Nanshan District, Shenzhen City, Guangdong, China

Tel: 0755-27657000

FAX: 755-27657908

E-mail:info@mosopower.com

Web Site:<http://www.mosopower.com>

| | | |
|--------------------|-------------------|--------------------|
| Prepared By | Checked By | Approved By |
| | | |

Description

The N7C series is specifically designed for industrial lighting applications, non-isolated design, operating in constant current with high power factor and a universal input voltage range of 108-380Vac. With 0-10V/PWM/ resistance dimming. The compact housing and high efficiency allow the drivers to operate with high reliability, while featuring input surge, output over voltage, short circuit and over temperature protection.



Product Features

- n Universal input voltage: 108-380Vac;
- n Rated Input voltage: 120-347Vac;
- n Constant current design, Efficiency up to 96%;
- n 3-in-1 dimmable: 0-10V / PWM / Resistor;
- n Dim-to-off without afterglow (optional);
- n High surge protection: DM: 6KV, CM: 6KV;
- n 12V/0.2A auxiliary power supply;
- n Output and Dimming Signal Isolating;
- n Protections: SCP / OVP / OTP;
- n 5 years warranty;

Application

- Linear high bay light
- Flood light
- Wall Pack light
- Shoebox light

Models

| Model Number | Input Voltage Range (Vac) | Max Output Power (W) | Output Voltage Range (Vdc) | Output Current Adjustable Range (A) | Default Current(A) | Eff. (Typ.) | PF(Typ.) | THD(Typ.) |
|----------------|---------------------------|----------------------|----------------------------|-------------------------------------|--------------------|-------------|----------|-----------|
| N7C-320M260A12 | 108-380 | 320 | 180-260 | 1.04-1.48 | 1.33 | 96% | 0.97 | 10% |

Notes:

[1]. All specifications are measured at 25°C ambient temperature, input voltage 277Vac, and the typical value tested at full load, if no specific note.

Input Specifications

| Parameter | Min | Typ. | Max | Notes |
|---------------------------------|--------|---------|---------|---|
| Input Voltage Range | 108Vac | - | 380Vac | |
| Rated Input voltage | 120Vac | - | 347Vac | Refer to Output Power vs. Input Voltage curve |
| Input Frequency AC | 47Hz | 50/60Hz | 63Hz | |
| Max Input Current | - | - | 3.8A | 120Vac & 100% load |
| Max Input Power | - | - | 360W | 120Vac & 100% load |
| Leakage Current | - | - | 0.75mIU | UL 8750; 347Vac/60Hz |
| Inrush Current | - | - | 60A | 120Vac, 100% load |
| Inrush Current | - | - | 100A | 220Vac, 100% load |
| Inrush Current | - | - | 155A | 347Vac, 100% load |
| Power Factor (PF) | 0.90 | 0.97 | | 120-347Vac , 50/60Hz , 80%-100% load |
| Total Harmonic Distortion (THD) | - | 10% | 20% | 120-277Vac , 50/60Hz , 80%-100% load |
| MCB(B16) | - | 5 | - | 220Vac; 100%load |

Output Specifications

| Parameter | Min | Typ. | Max | Notes |
|---------------------------------|--------|------|--------|--|
| Output Voltage Range | 180Vdc | - | 260Vdc | |
| Open Circuit Voltage | - | - | 310Vdc | |
| Output Current Range | 1.04A | - | 1.48A | Adjustable output current with potentiometer |
| Full Power Current Range | 1.23A | - | 1.48A | $P=U \cdot I=320W$, 100%load |
| Current Accuracy | -8% | - | +8% | |
| Total Output Current Ripple | - | 10% | 15% | 20MHz BW full load & LED load the LED load ripple is slightly different for different LEDs |
| Startup Overshoot Current | - | - | 10% | 120-347Vac full load condition, LED load |
| Auxiliary Source Output Voltage | 10.8V | 12V | 13.8V | |
| Auxiliary Source Output Current | - | - | 200mA | |
| Line Regulation | -5% | - | +5% | 25°C±10°C ambient temperature, input changes from 120Vac to 347Vac |
| Load Regulation | -5% | - | +5% | Load varies from 70% to 100% with 120-347Vac Input at 25°C±10°C ambient temperature |
| Turn-on Delay Time | - | - | 1s | 120Vac, 100% load |
| Turn-on Delay Time | - | - | 1s | 277Vac, 100% load |
| Turn-on Delay Time | - | - | 1s | 347Vac, 100% load |

General Specifications

| Parameter | Min | Typ. | Max | Notes |
|--------------------------------|--|-----------|-------|---|
| Efficiency@120Vac | 92% | 93% | - | 100% load, No load of auxiliary source |
| Efficiency@277Vac | 93% | 94% | - | 100% load, No load of auxiliary source |
| Efficiency@347Vac | 94% | 96% | - | 100% load, No load of auxiliary source |
| Mean Time Between Failure | - | 200Khours | - | 25°C±10°C ambient temperature , 230Vac , 80% load condition (MIL-HDBK-217/SR-332) |
| Lifetime | - | 50Khours | - | 230Vac & 100% load , Tc 80°C , refer to lifetime vs. case temperature curve |
| Operating Tc for Safety Tc_s | -40°C | - | +90°C | |
| Operating Tc for Warranty Tc_w | -40°C | - | +80°C | 5-year warranty shell temperature, humidity: 10% to 90% RH, Non-condensing |
| Storage Temperature Ta | -40°C | - | +85°C | Humidity: 5% to 95% RH, Non-condensing |
| Altitude | -60m | - | 4000m | |
| Over Temperature Protection Tc | 90°C | 95°C | 100°C | Decreases output current, returning to normal after over temperature is removed. |
| Short Circuit Protection | - | - | 15W | Constant current mode. The output shall return to normal when the fault condition is removed. |
| Dimensions (L*W*H) | 237*53*34mm | | | |
| Net Weight | 780g±50g/PCS | | | |
| Package (L*W*H) | 500*370*150 mm; 20 PCS/Ctn., Gross Weight: 16 Kg | | | |

Dimming

| Parameter | Min | Typ. | Max | Notes |
|-------------------------------|----------------------|-------|-----------------------|------------------------------|
| Absolute Maximum Voltage | - | 10V | 15V | On the Vdim (+) Pin |
| Source Current on Vdim (+)Pin | - | 100uA | 200uA | |
| Dimming Range | 10% I _{max} | - | 100% I _{set} | I _{set} =1.04-1.48A |
| Suggest Dimming Input 0-10V | 0V | - | 10V | |
| Turn-on Voltage | 1.0V | - | 1.3V | |
| Turn-off Voltage | 0.6V | - | 1.0V | |
| PWM in High Level | 9.7V | - | 10.3V | |
| PWM in Low Level | 0V | - | 0.3V | |
| PWM in Frequency Range | 1KHz | - | 2KHz | |
| PWM in Duty Cycle | 1% | - | 99% | |
| Turn-on Duty Cycle | 10% | - | 13% | |
| Turn-Off Duty Cycle | 6% | - | 10% | |
| Resistor Range | 0 | - | 100KΩ | |

Safety Specification

| Parameter | Min | Typ. | Max | Notes |
|---------------------------------------|------|---------|------|--|
| Dielectric Strength (Input-Ground) | - | 1700Vac | - | 60s , Current not exceeding 5mA |
| Dielectric Strength (Input-Dimming) | - | 1700Vac | - | 60s , Current not exceeding 5mA |
| Grounding Resistance | - | - | 0.1Ω | 25°C±10°C Ambient Temperature, pass 30A Current, 120s. |
| Insulation Resistance | 10MΩ | - | - | Input -PE, 500Vdc/60s/25°C |

Safety Compliance

| Safety Category | Standards | Approved | Notes |
|-----------------|----------------------------------|----------|-------|
| CCC | GB19510.1,GB19510.14 | | |
| CE | EN61347-1, EN61347-2-13, EN62493 | | |
| ENEC | EN61347-1, EN61347-2-13, EN62384 | | |
| CB | IEC61347-1, IEC61347-2-13 | | |
| BIS | IS 15885(PART 2/SEC 13) | | |
| UL | UL 8750 | √ | |
| CUL | CSA C22.2 No.250.13 | √ | |
| KC | K61347-1, K61347-2-13 | | |
| PSE | J61347-1, J61347-2-13 | | |
| SAA | AS/NZS IEC 61347.2.13 | | |
| SAA | AS/NZS 61347.1 | | |


EMC Compliance

| EMC Category | Standards | Approved | Notes |
|----------------------|----------------------------|----------|---------|
| CCC | GB/T 17743, GB 17625.1 | | |
| CE | EN 55015 | | |
| CE | EN 61000-3-2, EN 61000-3-3 | | |
| CE | EN61000-4-2,3,4,5,6,11 | | |
| CE | EN 61547 | | |
| KC | K61547 | | |
| KC | K00015 | | |
| PSE | J55015 | | |
| FCC | FCC part 15 | √ | CLASS A |
| Surge Shock Immunity | ANSI/C82.77-5-2017 | | |
| | IEC/EN 61000-4-5 | | |
| Ringing Wave | IEC/EN 61000-4-12 | | |
| | ANSI/IEEE C62.41.2 | | |

RoHS


Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU.

Inrush Current

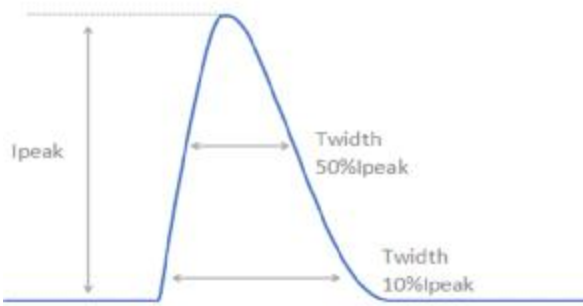


| V_{in} | I_{peak} | $T(@10\% \text{ of } I_{peak})$ | $T(@50\% \text{ of } I_{peak})$ |
|----------|------------|---------------------------------|---------------------------------|
| 220Vac | 100A | 320 μ s | 150 μ s |

Output Voltage vs. Output Current

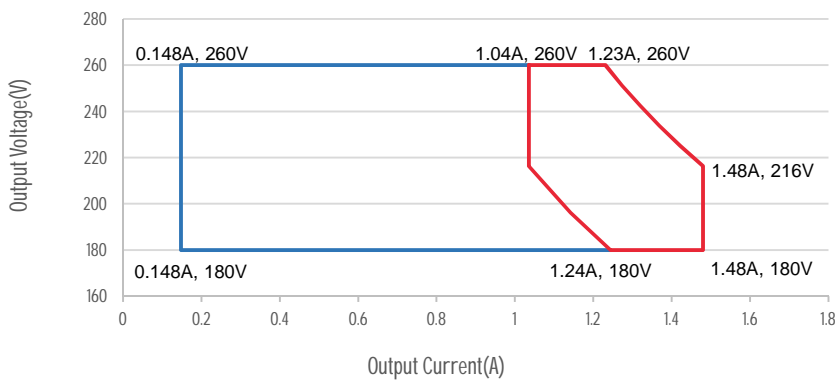


Red curve: good performance area


Output Power vs. Input Voltage

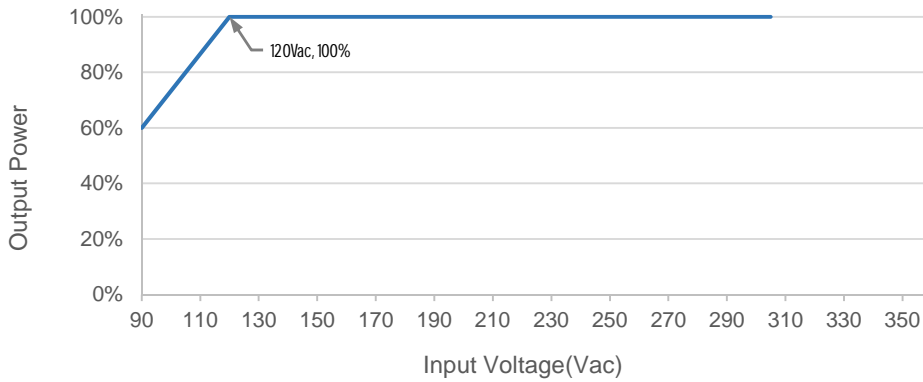


Efficiency vs. Load

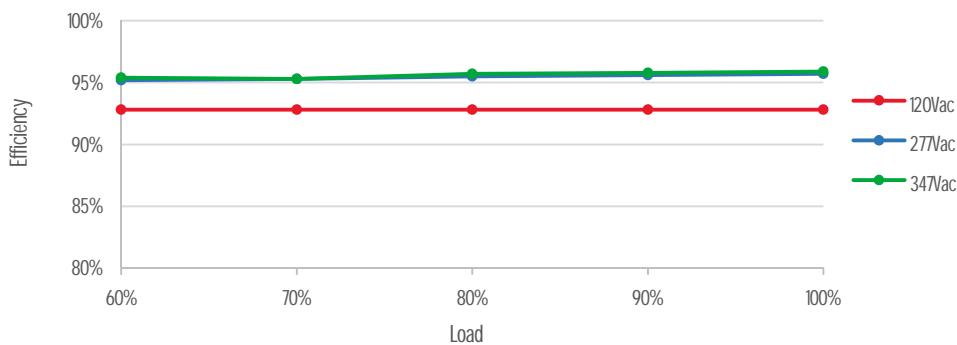


PF vs. Load

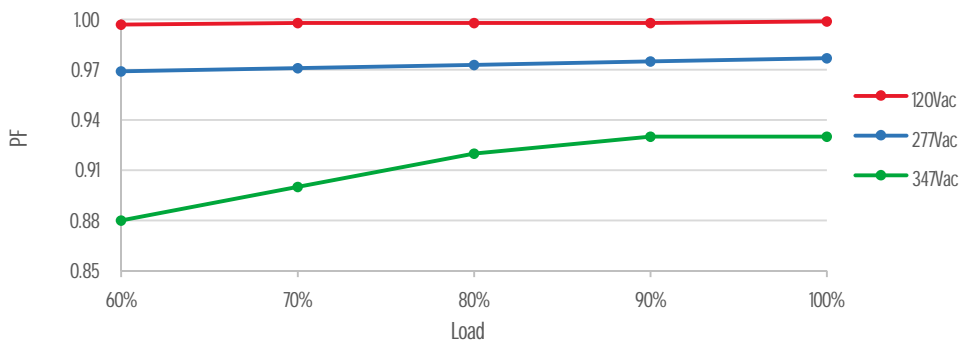


THD vs. Load

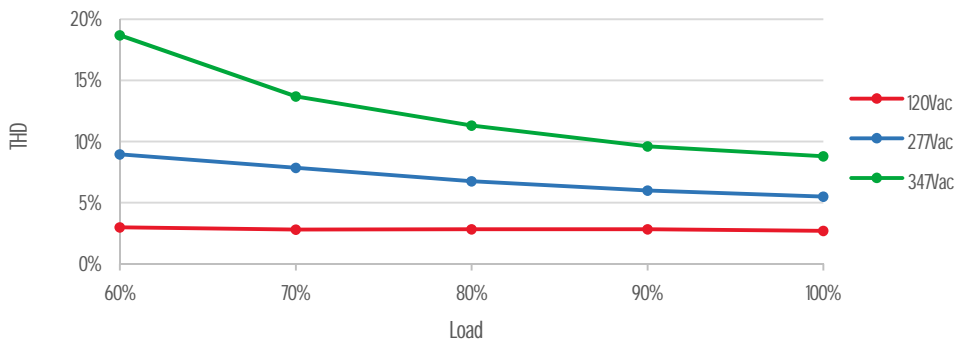


Output Power vs. Case Temperature

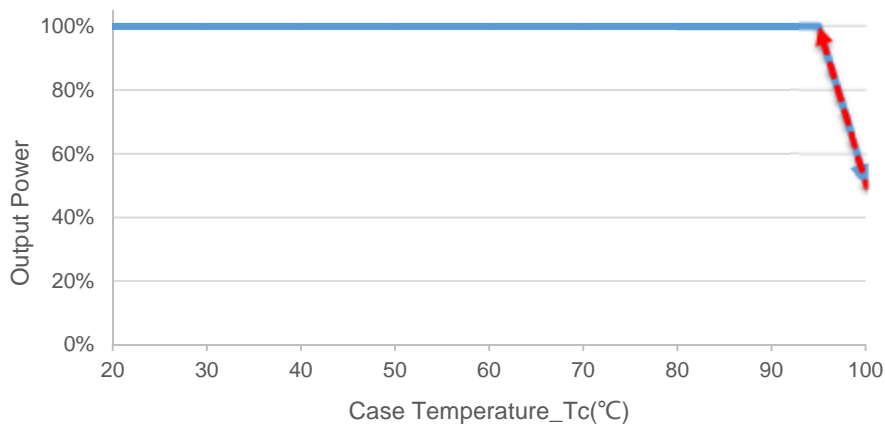


Lifetime vs. Case Temperature

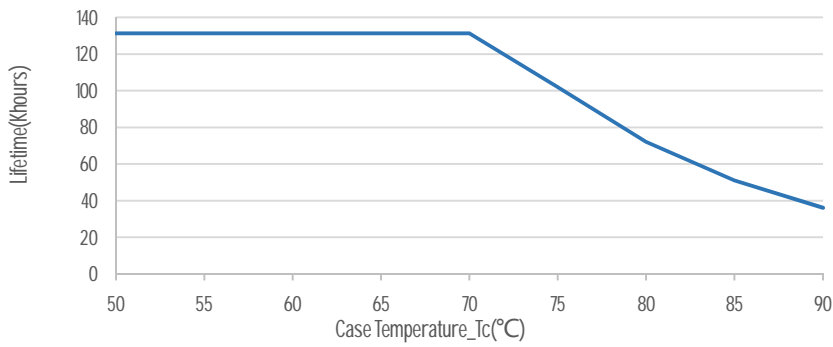

0-10V/PWM/Resistor Dimming

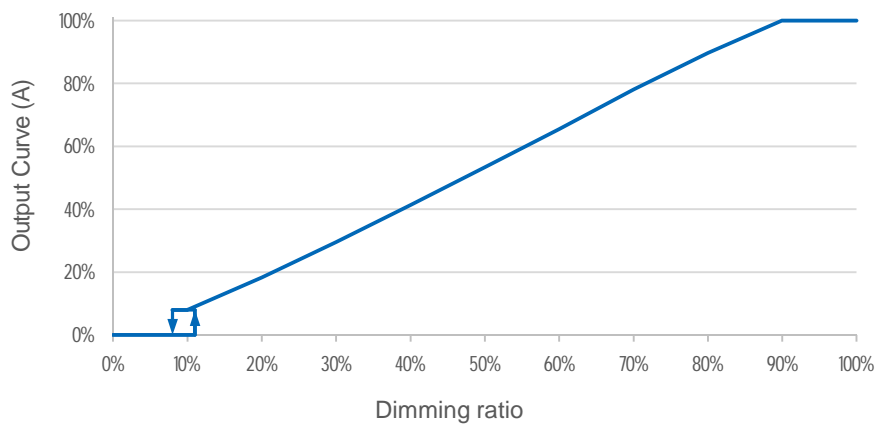

Mechanical Outline

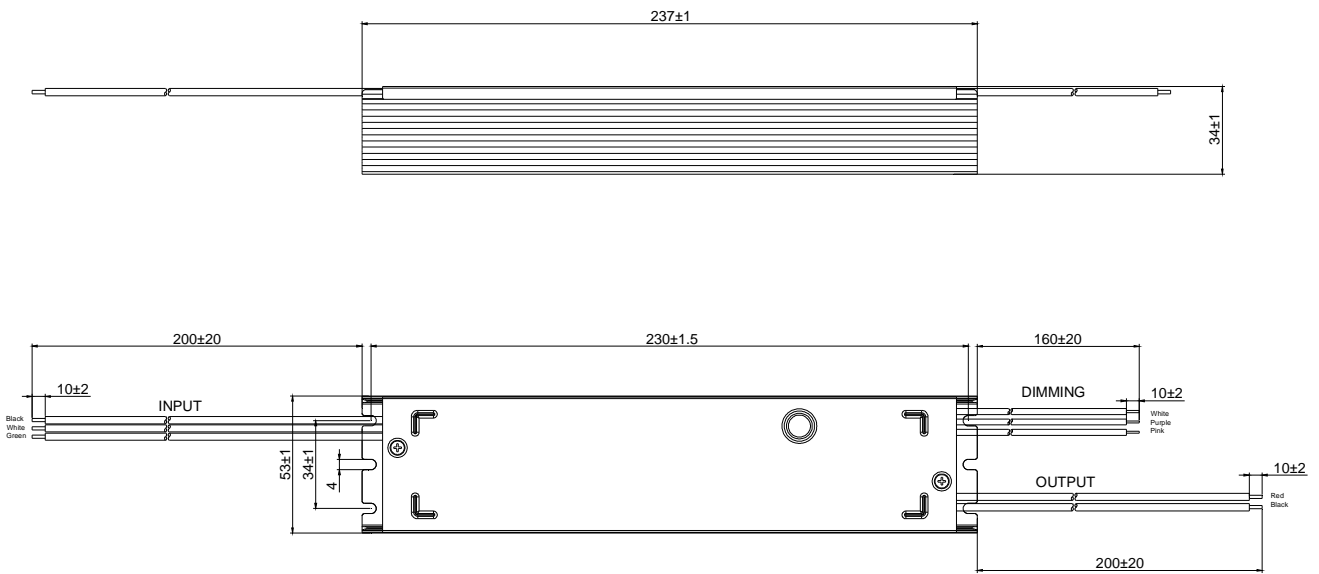

Notes:

- [1]. In order to meet the requirements of the "derating curve" and "maximum ambient temperature of 50 °C", it is necessary to add auxiliary heat dissipation devices with a recommended heat dissipation area of 380cm² and the volume is 115cm³; It is also necessary to add thermal conductive silicone grease between the heat sink and LED driver to ensure a tight fit with the auxiliary heat sink.
- [2]. The pressure resistance of LED beads and aluminum substrate should be greater than 2KVac.

Specification

| | | |
|---------|--|----|
| Input | UL 1015 18AWG L=200±20mm Tin-dip length 10±2mm | UL |
| Output | UL 1015 18AWG L=200±20mm Tin-dip length 10±2mm | UL |
| Dimming | UL 1015 22AWG L=160±20mm Tin-dip length 10±2mm | UL |

Version

| | | |
|-----|---------------|------------|
| A.1 | First release | 2024-02-27 |
| B.2 | ECL202403028 | 2024-03-13 |
| C.2 | ECL202404017 | 2024-04-10 |
| | | |
| | | |
| | | |
| | | |