

Specification for Approval

Product Name: 26W Constant Current Driver

Product Model: X6-026M052L ☒

X6-026V052L ☐

Rev: A.1

Address: XiLiSongbai Road 1061,
Nanshan District, Shenzhen City,
Guangdong Province, P.R.China

Post Code: 518108

TEL: 0755-27657000

FAX: 0755-27657908

E-mail: wcx@mosopower.com

Web site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By

Specification for Approval

Produce Name: 26W Constant Current Driver

Product Model: X6-026M052L ☒

X6-026V052L ☐

Rev: A.1

CUSTOMER AUTHORIZED SIGNATURE		
Tested By	Checked By	Approved By
(Company seal)Return one copy to MOSO with approved signature and company seal.		

XiLiSongbai Road 1061,
Address: Nanshan District, Shenzhen City, Post Code: 518108
Guangdong Province, P.R.China
TEL: 0755-27657000 FAX: 0755-27657908
E-mail: wcx@mosopower.com Web site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By

[illegible]



Product Feature:

- Input voltage range: 90~305Vac;
- Constant current design;
- Output current adjustable by Built-in potentiometer;
- THD<10%;
- 3-in-1 dimmable: 0~10Vdc, PWM , Resistor;
- Output and Dimming Signal Isolating, Dim to off;
- Standby power<0.5W;
- Surge protection:4KV line-line, 6KV line-earth;
- Protections: OVP, SCP;
- IP67 design for indoor and outdoor applications;
- 5 years warranty.

Application

- Suitable for LED roadway lighting, industrial lighting, etc.

DESCRIPTION


The X6-26W is constant-current output IP67 LED driver that operates from 90-305Vac input with excellent power factor and low THD. It is created for industrial lights, tunnel and street lights. The high efficiency of these drivers and compact metal case enable them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage and short circuit protection.

Models

Model Number	Input voltage range (Vac)	Max Output Power (W)	Output Voltage Range (Vdc)	Default output current (A)	Output current adjust range(A)	Typical Efficiency	Typical THD	Typical PF
								230Vac
X6-026Y052L	90-305	26	28-52	0.5	0.25-0.5	87%	6%	0.97

Notes:

1. Y=V means no dimmable, Y=M means 0-10V/PWM dimming.
Model -A means forward dimming, and model -B means reverse dimming
2. All specifications are measured at 25℃ ambient temperature, input voltage 230Vac/50Hz, and the typical value tested by full load, if no specific note.

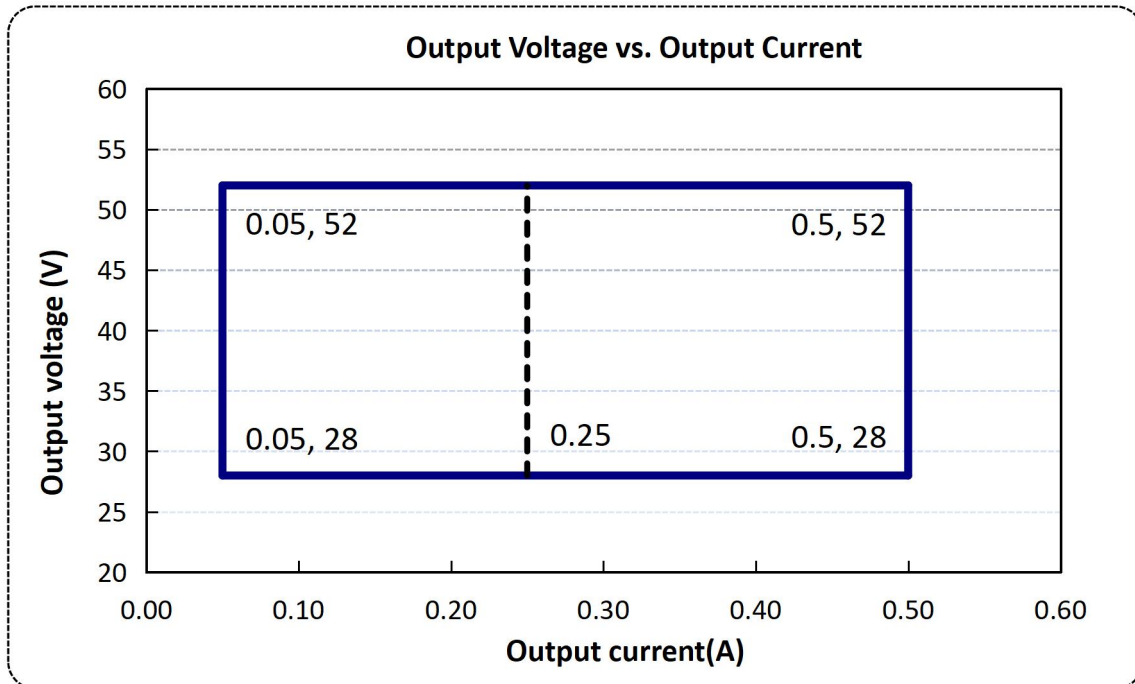OPERATING AREA I-V
X6-026Y052L


Notes: The area to the right of the dotted line is the adjustable range of the output current

INPUT SPECIFICATIONS

Parameter	Min.		Typ.		Max.		Notes
Input Voltage	90Vac		100-277Vac		305Vac		
Input Frequency	47Hz		50/60		63Hz		
Leakage Current	-		-		0.75mA		277Vac/60Hz
Input AC Current	-		-		0.4A		100-277Vac with full load
Inrush Current	-		-		0.15A ² S		230Vac input with full load, Ta=25°C (cold start)
Power Factor	0.97		0.99		-		120Vac, 60Hz, full load
	0.95		0.97		-		230Vac, 50Hz, 100% load (Ps: Input 220Vac, 50Hz, Output 41.8V&0.24A, PF>0.9)
	0.93		0.95		-		277Vac, 50Hz, full load
THD	-		6%		10%		100-240Vac 50-60Hz, 70%-100% load
	-				15%		277Vac, 50Hz/60Hz, 70%-100% load
Max. NO. of PSUs on Circuit Breaker	B10	16	B16	25	B25	39	230Vac 100% load
	C10	26	C16	41	C25	65	

OUTPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-8%	-	+8%	
Output Current set range(A) X6-026Y052L	0.25	-	0.5	
Total Output Current Ripple(pk-pk)	-	150%	200%	20MHz BW, full load & LED Load, ripple is different with difference LED load.
Startup Overshoot Current	-	5%	10%	100~277Vac & full load, LED Load
No Load Output Voltage(V) X6-026Y052L	-	-	75	
Line Regulation	-3%	-	+3%	25°C±10°C ambient temperature, input voltage changes from 100Vac to 277Vac.
Load Regulation	-5%	-	+5%	25°C±10°C ambient temperature, 230Vac input, load changes from 60% to 100%.
Turn-on Delay Time	-	-	3S	120Vac, 100% load
	-	0.5S	1S	230Vac, 100% load
Standby Power	-	-	0.5W	@230Vac/50Hz, Dimming Off

GENERAL SPECIFICATIONS

Parameter		Min.	Typ.	Max.	Notes
Efficiency @120Vac X6-026Y052L		84%	86%		Measured at full load and 25°C ambient temperature
Efficiency @230Vac X6-026Y052L		85%	87%		Measured at full load and 25°C ambient temperature
Efficiency @277Vac X6-026Y052L		85%	87%		Measured at full load and 25°C ambient temperature
Dielectric Strength	Input-Output	-	3750Vac	-	5mA/60S
	Input-PE	-	1875Vac	-	
	Output- PE	-	1600Vac	-	
Grounding Resistance		-	-	0.1Ω	25A/60S at 25°C ambient temperature
Insulation Resistance		10MΩ	-	-	Input-Output, Input-PE, Output-PE, 500Vdc/60S/25°C/70%RH
MTBF		-	200000 Hours	-	230Vac/25°C, 80% load (MIL-HDBK-217F)
Lifetime		-	50000Hours	-	230Vac&100% load, 75°C case temperature, refer to lifetime VS Tc curve for details
Operating Temperature		-40°C		60°C	
Operating Case Temperature for Safety Tc_s		-40°C	-	+85°C	
Operating Case Temperature for Warranty Tc_w		-40°C	-	+75°C	5 Years Warranty Humidity: 10% to 95% RH

Storage Temperature	-40℃	-	+85℃	Humidity: 10% to 100% RH
Dimensions (L×W×H)mm	L119*W65*H34			
Net Weight	470±50g/PCS			
Package	L488mm*W298mm*H200mm; 15PCS/Ctn, Gross Weight: 9Kg			

Note: All specifications are tested by Cree XLamp XP-G2 and typical measured at 230Vac and 25℃ unless otherwise stated.

DIMMING

Parameter		Min.	Typ.	Max.	Notes
0~10V Absolute Maximum Voltage on the Vdim (+) Pin		-	10V	-	
0~10V Source Current on Vdim(+)Pin		-	100uA	200uA	
Dimming Output Range	X6-026M052L	10% I _{max}	-	100% I _{max}	I _{max} =0.5A
Recommended Dimming Range for 0-10V		0V	-	10V	Default 0-10V/PWM dimming
PWM_in High Level		9.7V		10.3V	
PWM_in Low Level		0V		0.3V	
PWM_in Frequency Range		300Hz		2KHz	
PWM_in Duty Cycle		1%		99%	

SAFETY STANDARDS


Safety Category	Country / Territory	Standards	Whether have Certification
CCC	China	GB19510.1, GB19510.14	
CE	Europe	EN61347-1, EN61347-2-13	
		EN62493	
ENEC		EN62384	
CB	CB Countries	IEC61347-1, IEC61347-2-13	
BIS	India	IS 15885(PART 2/SEC 13)	
UL	USA	UL 8750	√
CUL	Canada	CSA C22.2 No.250.13	
KC	South Korea	K61347-1, K61347-2-13	
PSE	Japan	J61347-1, J61347-2-13	
SAA	Australia	AS/NZS IEC 61347.2.13	
		AS/NZS 61347.1	

EMC COMPLIANCE


EMC Category	Country / Territory	Standards	Whether have Certification
CCC	China	GB/T 17743, GB 17625.1	
CE	Europe	EN 55015	
		EN 61000-3-2, EN 61000-3-3	
		EN61000-4-2,3,4,5,6,11	
		EN 61547	
KC	South Korea	K61547	
		K00015	
PSE	Japan	J55015	
FCC	USA	FCC part 15	√

NOTE:


This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

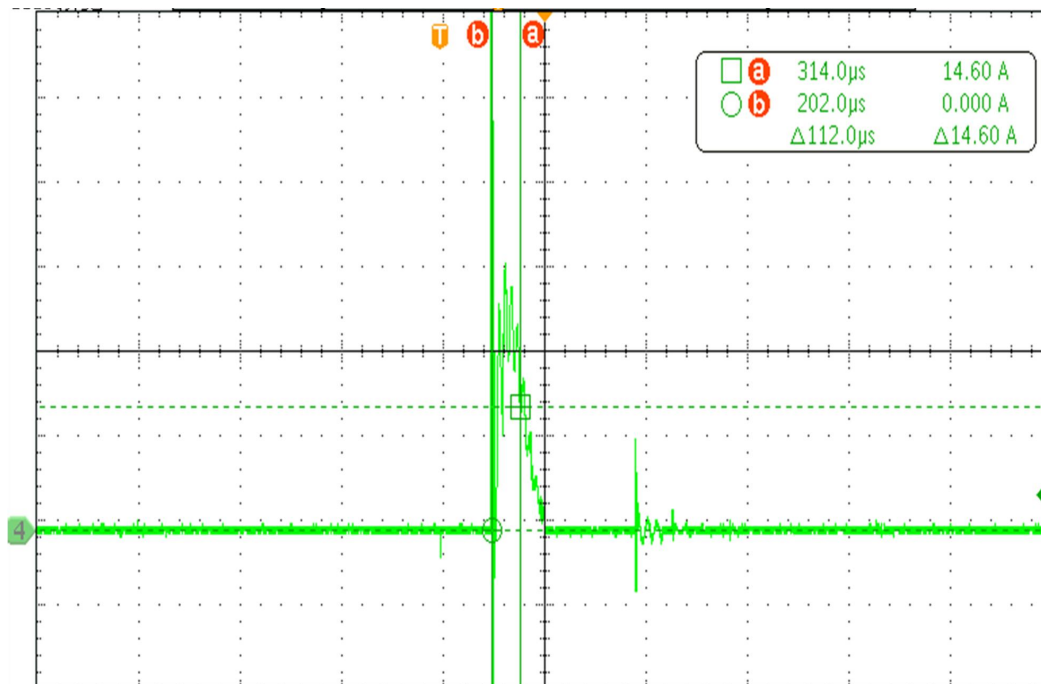INRUSH CURRENT WAVEFORM


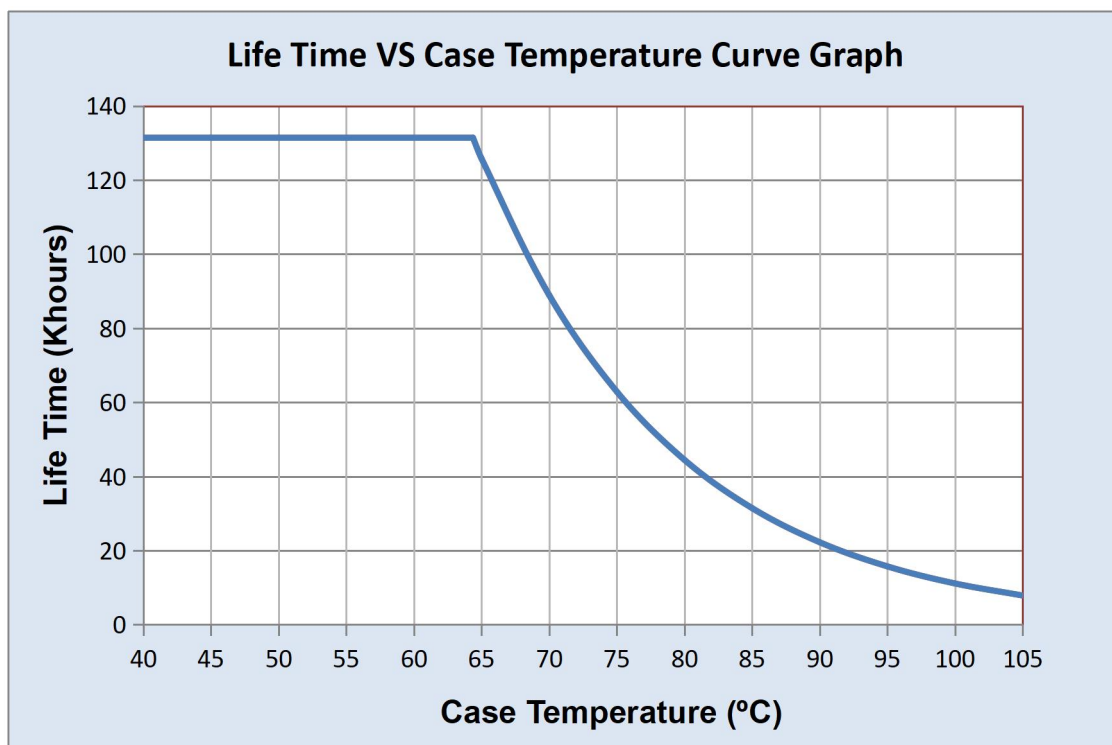
DERATING CURVE

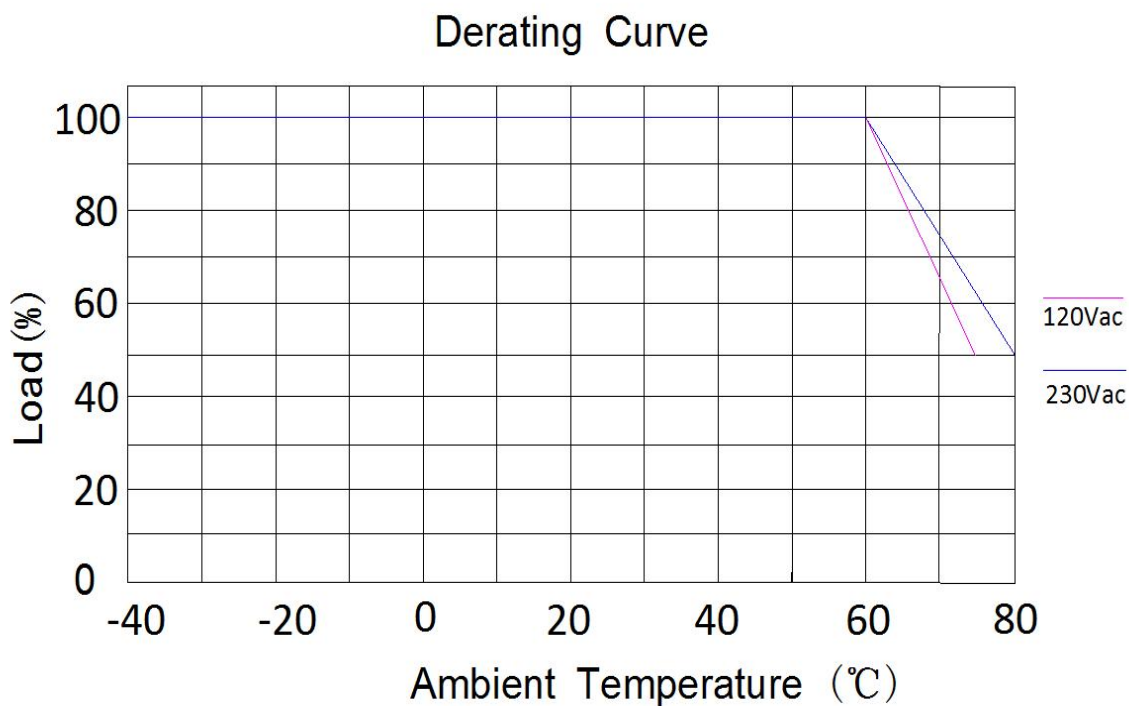


OUTPUT POWER VS INPUT VOLTAGE

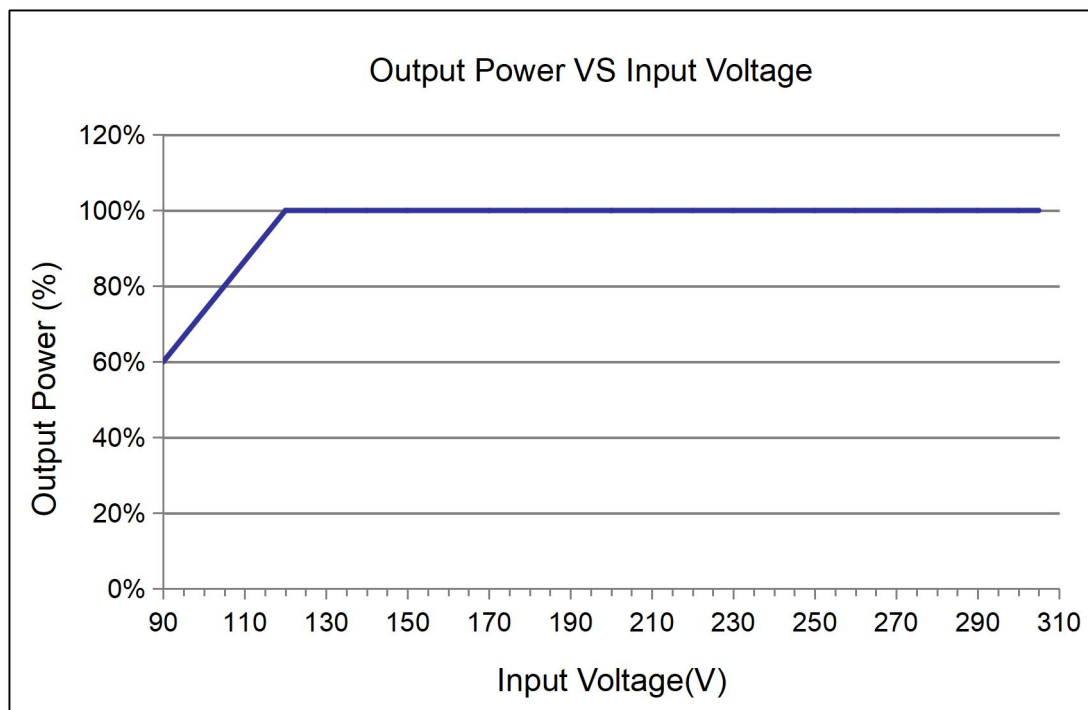


LIFETIME VS CASE TEMPERATURE




EFFICIENCY VS LOAD

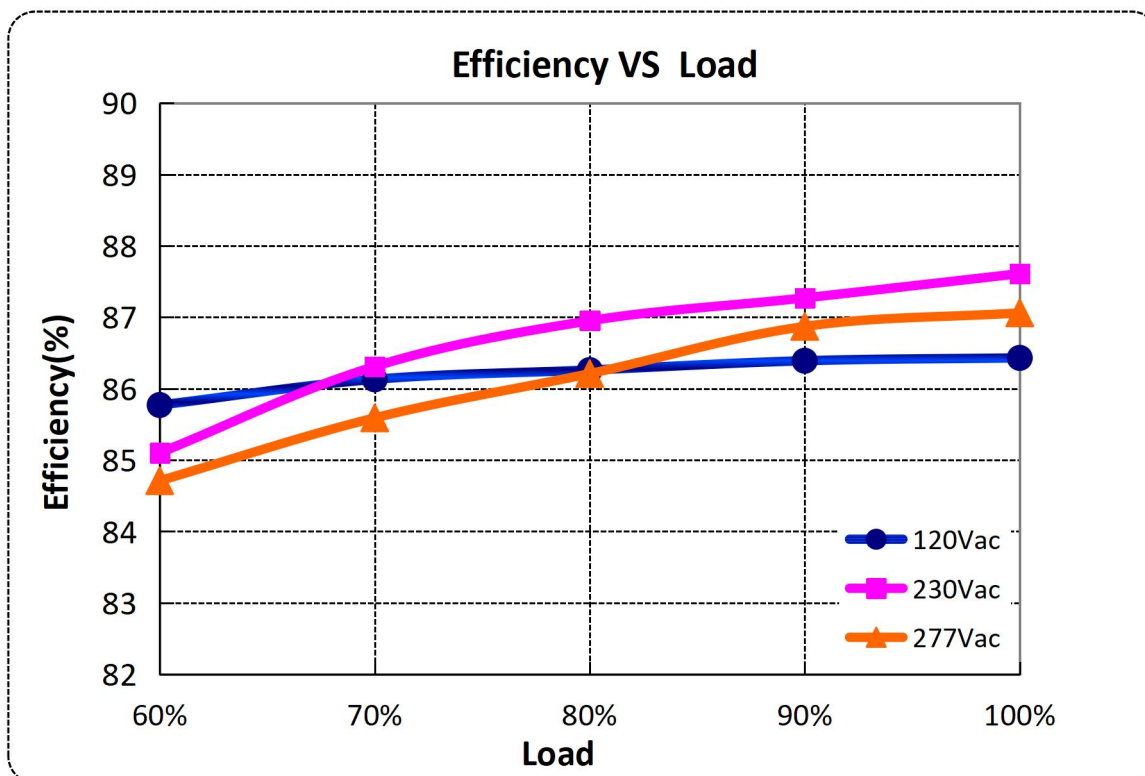


POWER FACTOR VS LOAD

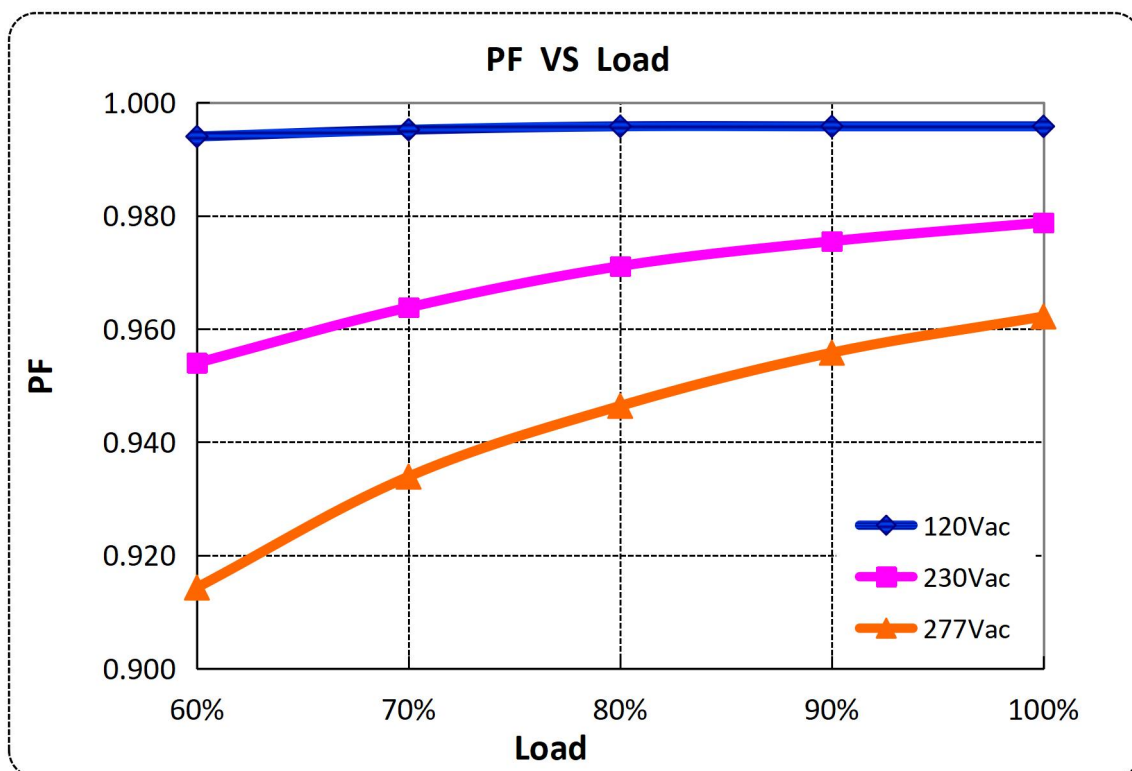

TOTAL HARMONIC DISTORTION

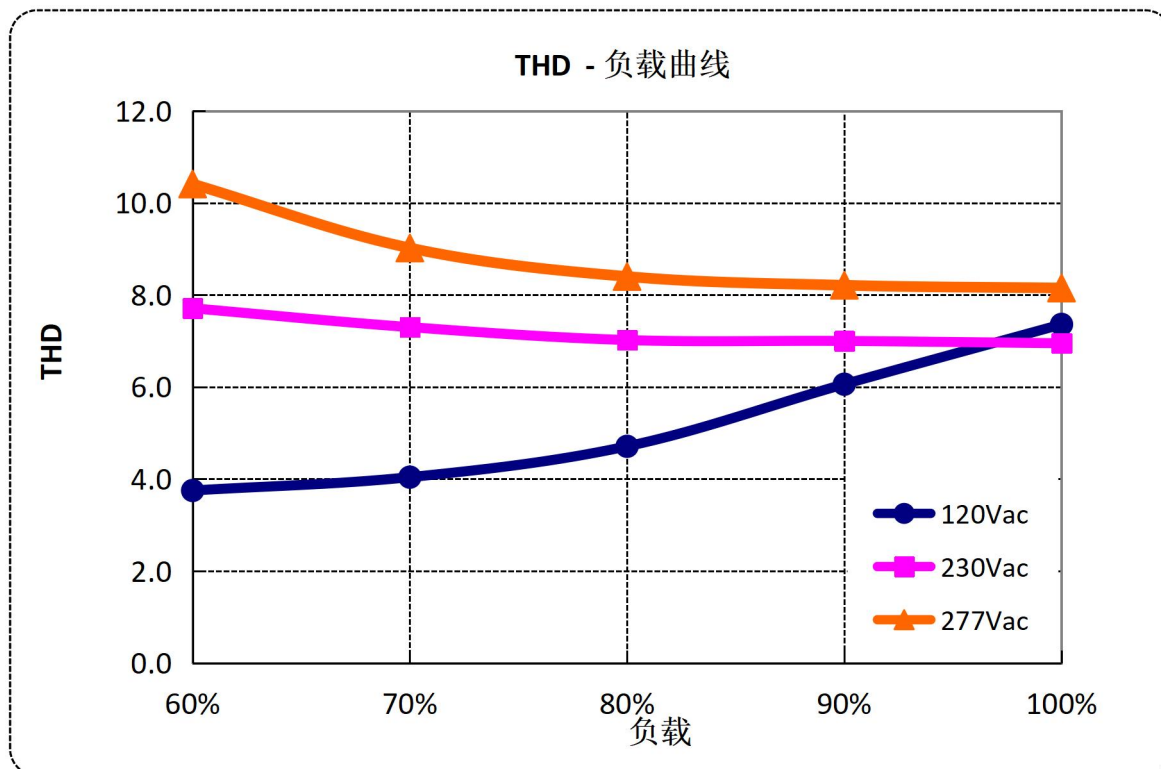

0-10V/PWM DIMMING CURVE

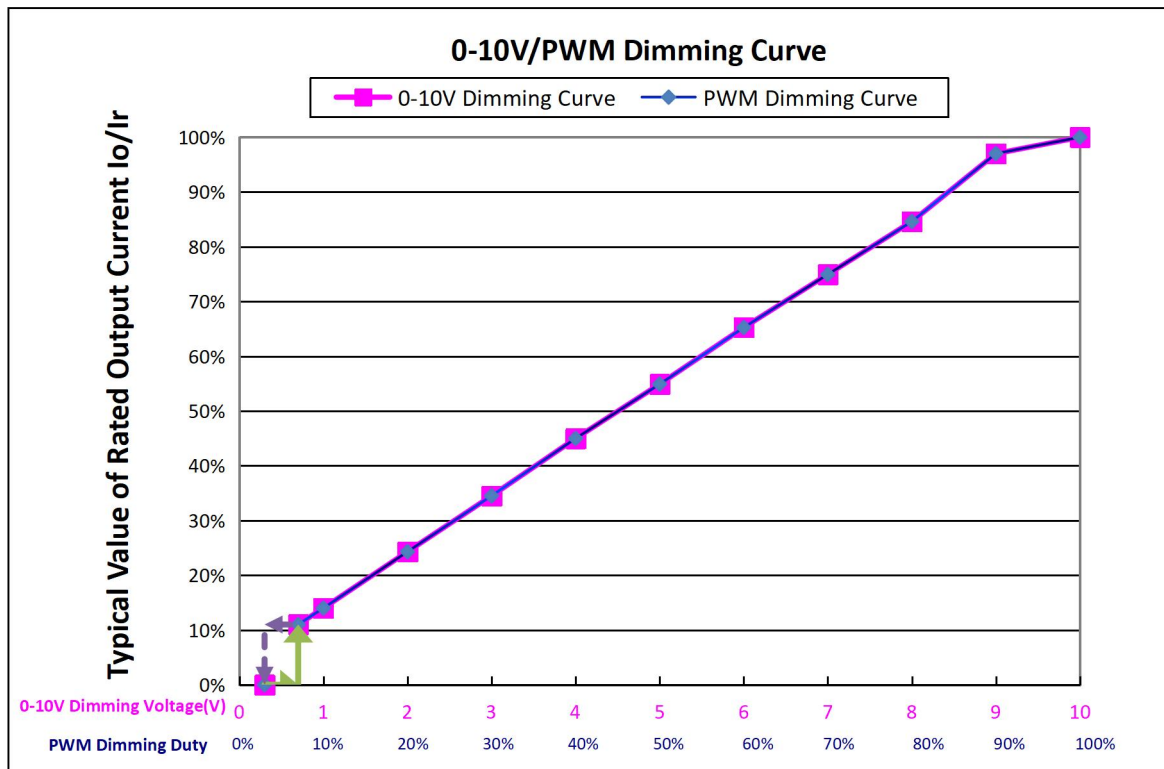


NOTE: Dimming off mode is to reduce the output voltage. After dimming off, the power output still has residual voltage. The opening voltage of the lamp should be higher than the residual voltage.

PROTECTIONS

Parameter	Notes
Short Circuit Protection	Constant current mode and auto recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Output over Voltage Protection	Run into protection model when output voltage exceeds limit, and return to normal when the fault is eliminated and restart the power supply.

MECHANICAL OUTLIN

X6-026M052L

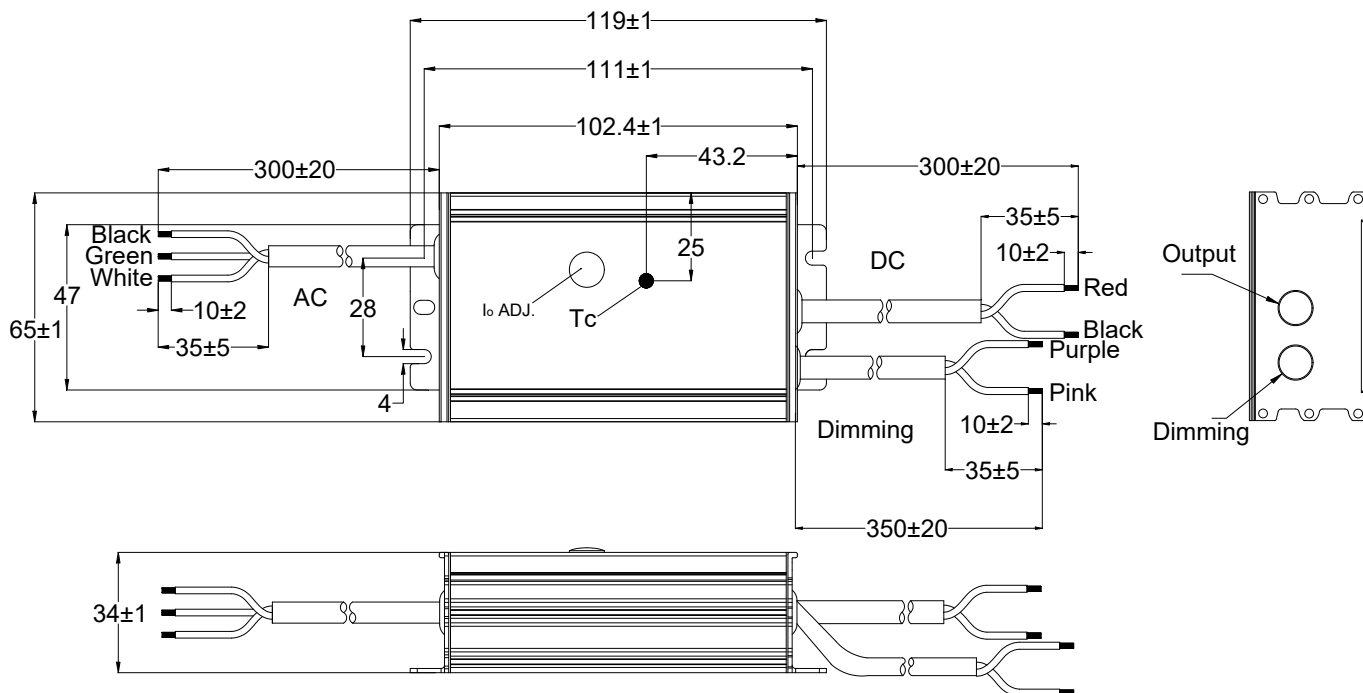

Wire	Specification	Note
Input	UL SJOW 18AWG *3C L=300±20mm	UL
Output	UL SJOW 18AWG *2C L=300±20mm	UL
Dimming	UL 2733 22AWG *2C L=350±20mm	Y=M

LABEL



CASE LABEL

