

## Specification for Approval

Product Name : 150W Constant Voltage LED Driver  
Product Model: V6E-150B036  
Rev. A.1  
Sample Date: -

CUSTOMER AUTHORIZED SIGNATURE		
Tested By	Checked By	Approved By
(Company seal)Return one copy to MOSO with approved signature and company seal.		

Prepared By	Checked By	Approved By







### Product Features:

- ◆ Input voltage: 176~264Vac;
- ◆ Constant voltage output;
- ◆ High power factor >0.97(230Vac& full load);
- ◆ THD<10%;
- ◆ Surge immunity: DM 6KV, CM 10KV;
- ◆ Protection: Input UVP, Output SCP, OVP, OTP, OCP;
- ◆ IP67, glue potted, suitable for dry / wet / damp locations;
- ◆ 5 years warranty.

### Application

- ◆ Suitable for landscape lighting.

### DESCRIPTION

The V6E-150 series is a 150W constant-voltage, the LED driver that operates from 176~264Vac input with excellent power factor and low THD. It is designed for landscape lighting. The high efficiency of the driver and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, under voltage, output over current, over voltage, short circuit, and over temperature.

### MODELS

Model Number	Max Output Power(W)	Output Voltage (Vdc)	Output Current Range (A)	Typical Efficiency	Typical PF	Typical THD
V6E-150B036	150	36	0~4.17	93%	0.97	10%

### Notes:

All performance parameters are measured at 25°C ambient temperature, 230Vac input, full load conditions, except for those specified

**INPUT SPECIFICATIONS**

Parameter	Min.		Typ.		Max.		Notes	
Input Voltage	176Vac		200-240Vac		264Vac			
Input Frequency	47Hz		50/60		63Hz			
Leakage Current	-		-		0.70mA		240Vac/60Hz	
Input AC Current	-		-		1.0A		200-240Vac & full load	
Inrush Current	-		-		75 A		Cold start, 10%Ipeak, 230Vac & full load,	
Power Factor	0.96				-		220-240Vac & 50-60Hz & full load	
	0.95						220-240Vac & 50-60Hz& 75% load	
	0.90						220-240Vac & 50-60Hz&50% load	
THD	-				10%		220-240Vac,50-60Hz, 50%~100% load	
Max. No. of PSUs on CIRCUIT BREAKER	B10	5	B16	7	B20	9	B25	11
	C10	8	C16	12	C20	15	C25	18

**OUTPUT SPECIFICATIONS**

Parameter	Min.	Typ.	Max.	Notes
Output Voltage Tolerance	-2%	-	+2%	
Total Output Voltage Ripple(pk-pk)	-2%	-	2%	Full load, Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor.
Output overshoot	-5%	-	+5%	200~240Vac & Full Load
Line Regulation	-0.5%	-	+0.5%	25°C±10°C ambient temperature, input voltage changes from 200Vac to 240Vac.
Load Regulation	-1%	-	+1%	25°C±10°C ambient temperature, 230Vac input, load changes from 50% to 100%.
Turn-on Delay Time	-	-	0.5S	230Vac,100% load
Temperature Coefficient	-	±0.03%/°C	-	-40°C ~ +60°C

**GENERAL SPECIFICATIONS**

Parameter		Min.	Typ.	Max.	Notes
Efficiency@230Vac V6E-150B036		91.0%	93.0%	-	100% load, 25°C ambient temperature
		90.0%	92.5%	-	75% load, 25°C ambient temperature
		89.0%	90.5%	-	50% load, 25°C ambient temperature
Dielectric Strength	Input-Output	-	3750Vac	-	5mA/60S
	Input-PE	-	1875Vac	-	
	Output- PE	-	500Vac	-	
Grounding Resistance		-	-	0.1Ω	25A/60S
Insulation Resistance		10MΩ	-	-	Input-Output,Input-PE,Output-PE,500Vdc/60S/25°C/70%RH
MTBF			200Khrs	-	230Vac,25°C,80% load (MIL-HDBK-217F@SR332)
Lifetime		-	50000Hours	-	230Vac&100% load,75°C case temperature, refer to lifetime VS Tc curve for details
Ambient Temperature		-40°C		+60°C	
Operating Case Temperature for Safety Tc_s		-40°C	-	+90°C	
Operating Case Temperature for Warranty Tc_w		-40°C	-	+75°C	5 years warranty case temperature Humidity: 10% to 100% RH
Storage Temperature		-40°C	-	+90°C	Humidity: 10% to 100% RH
Dimensions (L*W*H)mm		L162.5xW67.2xH37			
Net Weight		750±50g/PCS			
Package		L500mm*W310mm*H160mm 15PCS/Ctn			

**SAFTY STANDARDS**

Safety Category	Country / Territory	Standards	Approved
CCC	China	GB19510.1, GB19510.14	√
CE	Europe	EN61347-1, EN61347-2-13	√
		EN62493	√
ENEC		EN62384	
CB	CB Countries	IEC61347-1, IEC61347-2-13	
BIS	India	IS 15885(PART 2/SEC 13)	
UL	USA	UL 8750	
CUL	Canada	CSA C22.2 No.250.13	
KC	South Korea	K61347-1, K61347-2-13	
PSE	Japan	J61347-1, J61347-2-13	
SAA	Australia	AS/NZS IEC 61347.2.13	
		AS/NZS 61347.1	


### EMC COMPLIANCE

EMC Category	Country / Territory	Standards	Approved
CCC	China	GB/T 17743, GB 17625.1	√
CE	Europe	EN 55015	√
		EN 61000-3-2, EN 61000-3-3	√
		EN61000-4-2,3,4,5,6,11	√
		EN 61547	√
KC	South Korea	K61547	
		K00015	
PSE	Japan	J55015	
FCC	USA	FCC part 15	


### NOTE:

This LED driver meets the EMI specifications above, but as a component of a luminaire, end customer need to identify the EMI performance of a luminaire including LED driver, other devices connected to the driver and on the luminaire itself.

### INRUSH CURRENT WAVEFORM

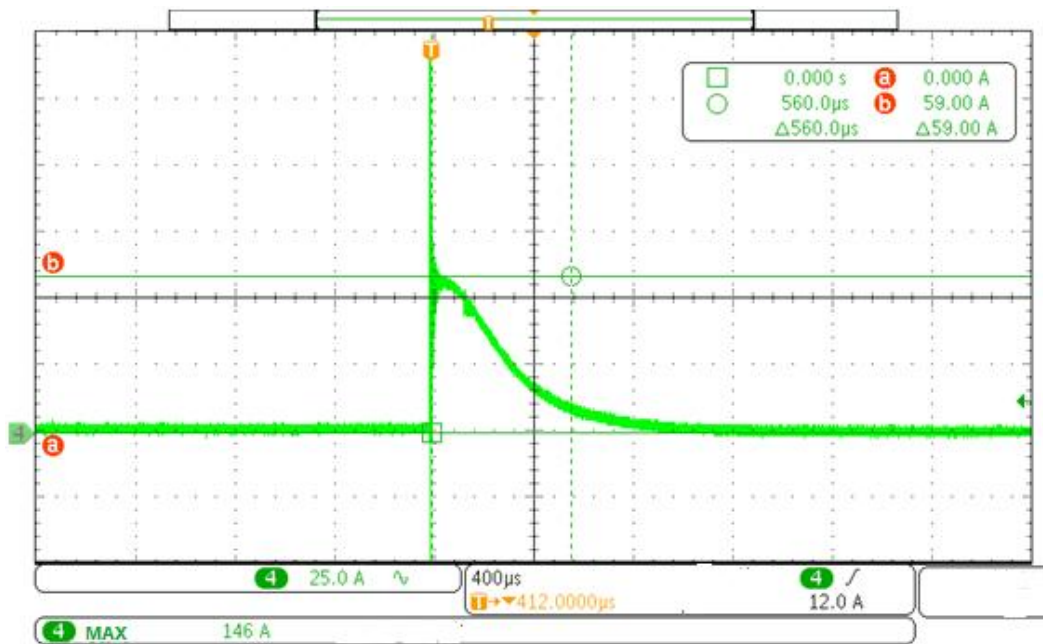


### Life Time VS Temperature Curve

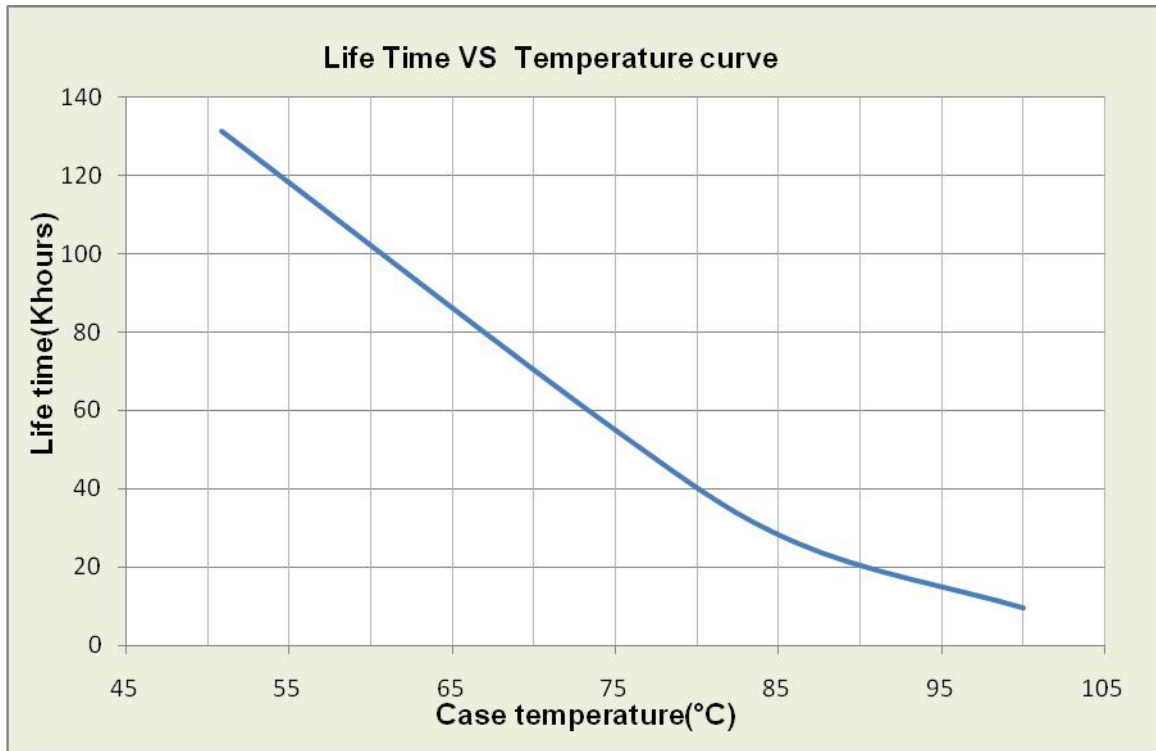


### DERATING CURVE

#### Derating Curve

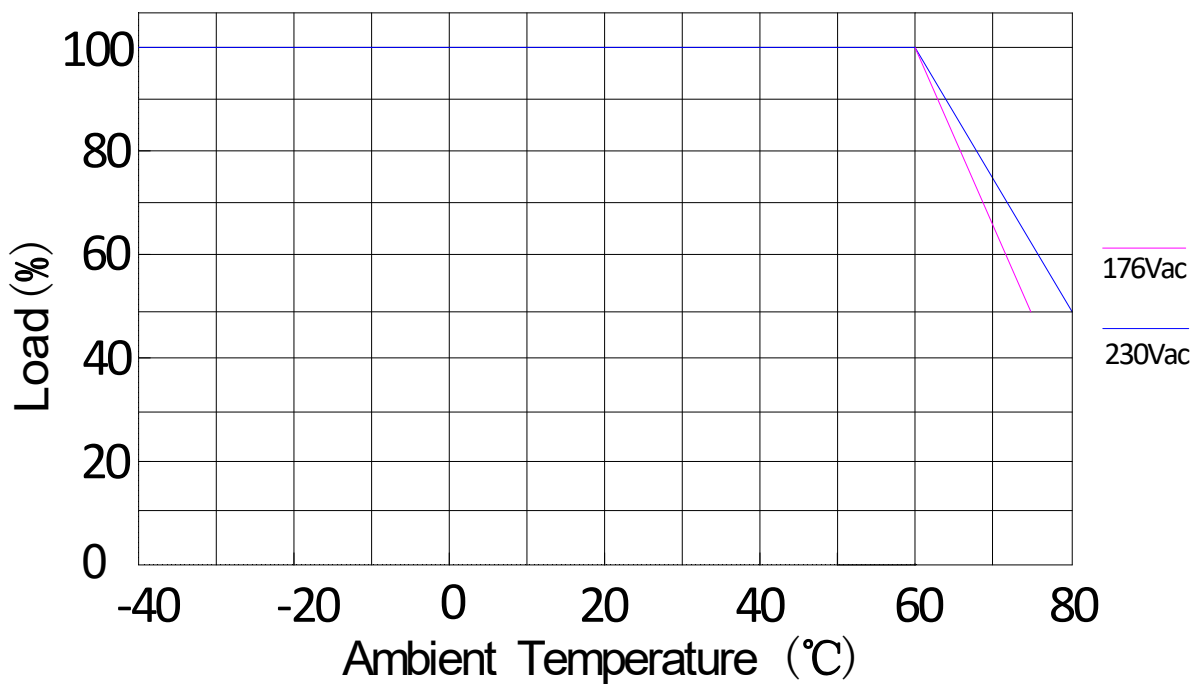





## EFFICIENCY VS LOAD

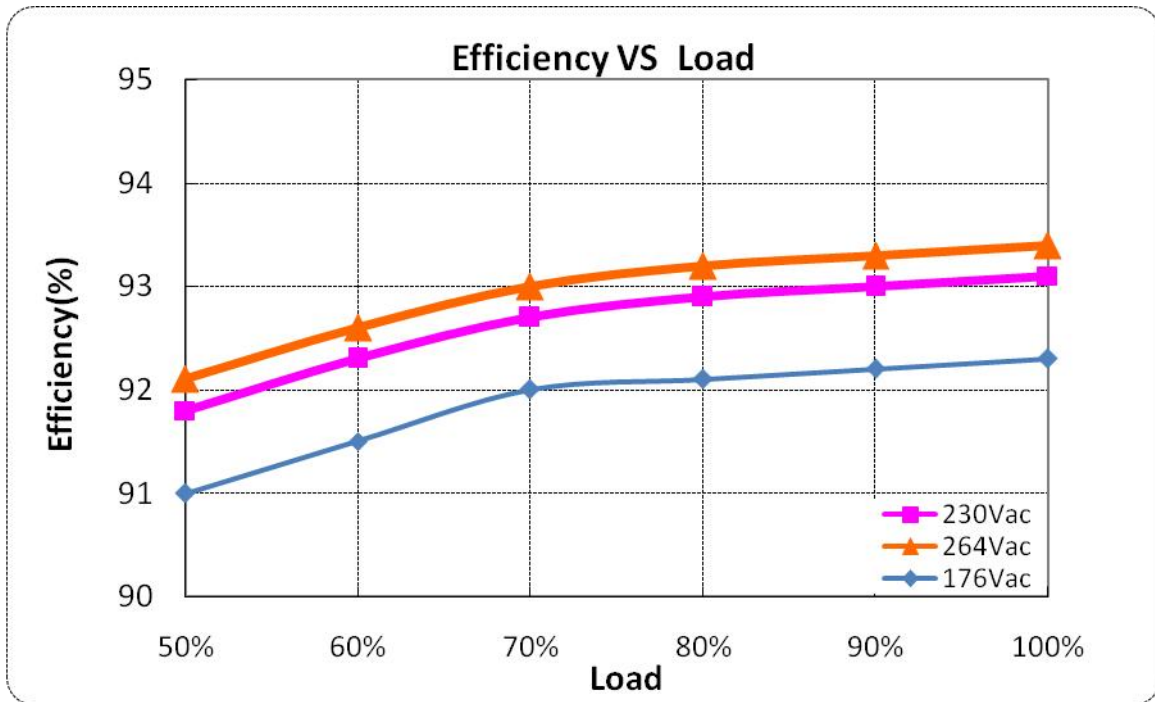

## POWER FACTOR VS LOAD

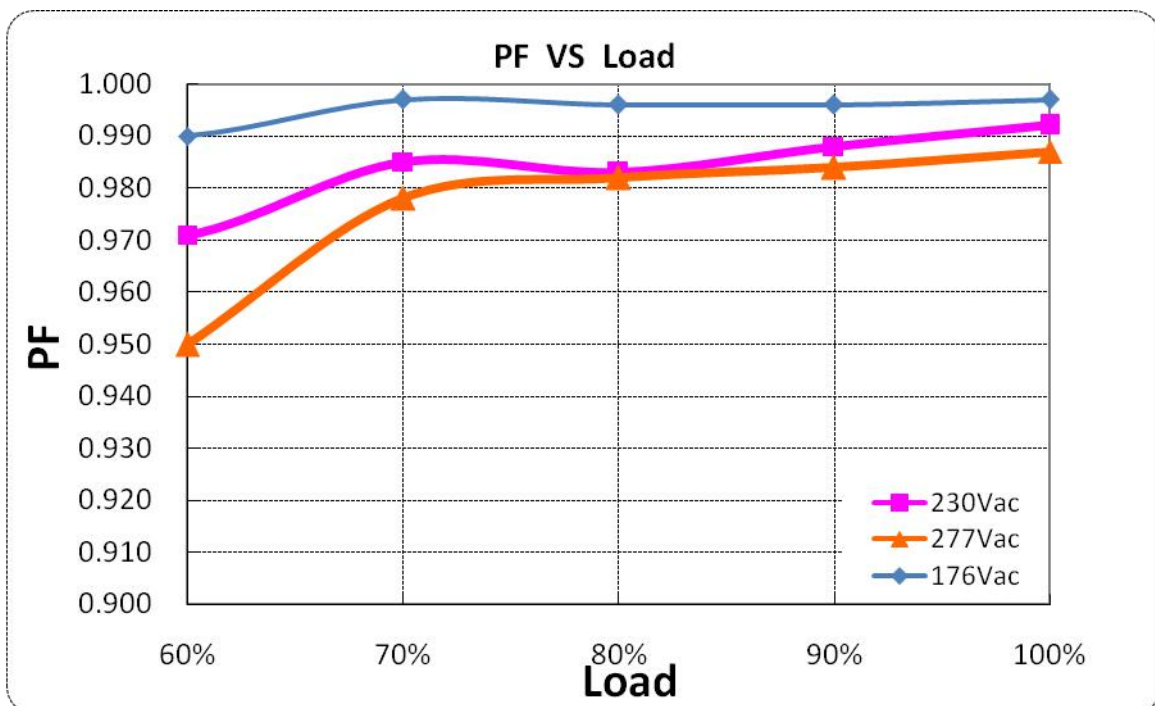


### TOTAL HARMONIC DISTORTION

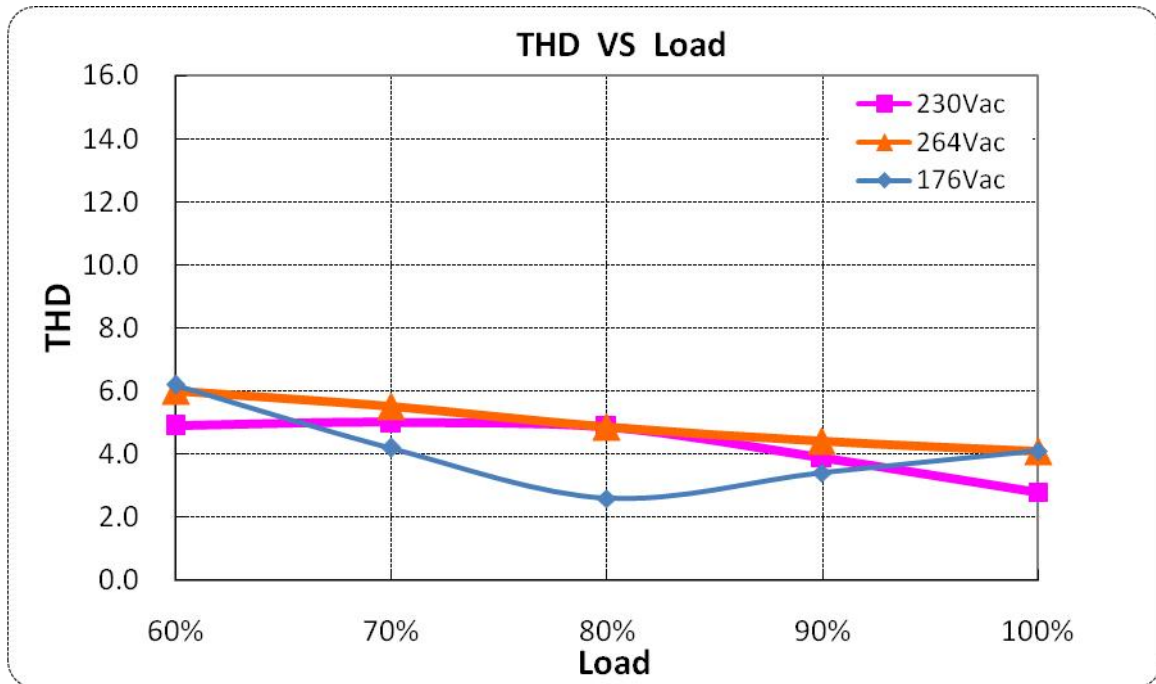

### PROTECTIONS


Parameter	Min.	Typ.	Max.	Notes
Input under voltage protection	156V		176V	The product will shut down when input under voltage
Over temperature protection	Turn off the output. Returning to normal after over temperature is removed.			
Short circuit protection	Hiccup mode. The output shall return to normal when the fault condition is removed.			
Over current protection	>2.5 times load into hiccup mode, The output shall return to normal when the fault condition is removed.			
Over voltage protection	Turn off the output voltage, when the fault is removed, restart and resume.			

### MECHANICAL OUTLINE

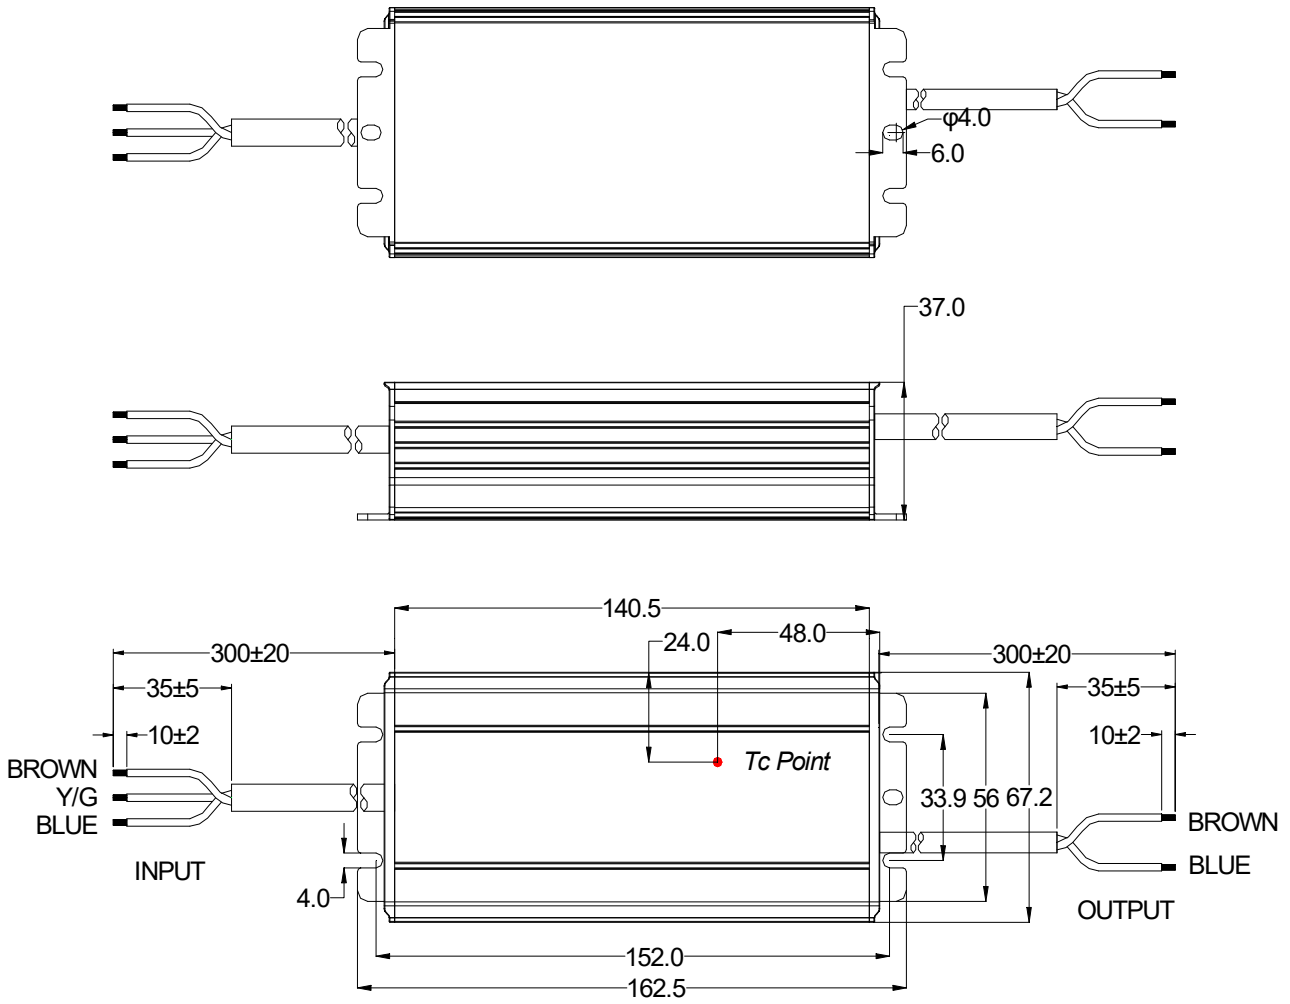

Wire	Specification			Note
Input	CCC+VDE	3*1.0mm <sup>2</sup>	L=300±20mm	CCC/CE
Output	CCC+VDE	2*1.0mm <sup>2</sup>	L=300±20mm	CCC/CE

### TABLE

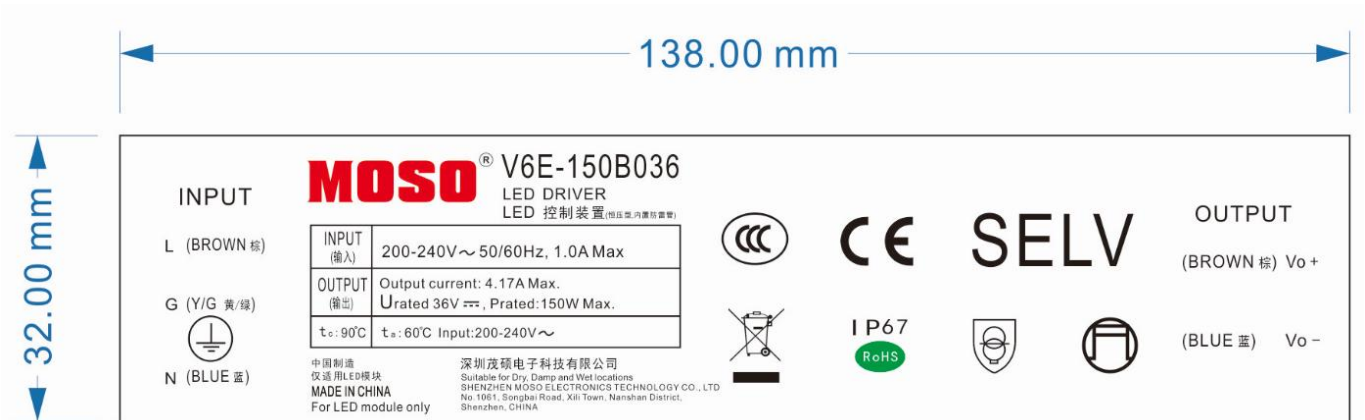

### ROHS

Our products comply with RoHS Directive (EU) 2015/863