

Specification for Approval

Product Name: 350W Constant Voltage LED Driver
Product Model: V6E-350B036
Rev. B.2

CUSTOMER AUTHORIZED SIGNATURE		
Tested By	Checked By	Approved By
(Company seal)Return one copy to MOSO with approved signature and company seal.		

XiLiSongbai Road 1061, Nanshan
Address: District, Shenzhen City, Guangdong Post Code: 518108
Province, P.R.China
TEL: 0755-27657000 FAX: 0755-27657908
E-mail: info@mosopower.com Web site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By



Product Features:

- ◆ Input voltage: 176~264Vac;
- ◆ Constant voltage output;
- ◆ High power factor >0.97(230Vac& full load);
- ◆ THD<10%;
- ◆ Protection: InputUVP, output SCP, OVP, OTP, OCP;
- ◆ Surge immunity: DM6KV,CM10KV;
- ◆ IP67, glue potted, suitable for dry / wet / damp locations;
- ◆ 5 years warranty.

Application

- ◆ Suitable for landscape lighting.

DESCRIPTION

The V6E-350 series is a 350W constant-voltage, the LED driver that operates from 176~264Vac input with excellent power factor and low THD. It is designed for landscape lighting. The high efficiency of the driver and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, under voltage, output over current, over voltage, short circuit, and over temperature.

MODELS

Model Number	Max Output Power(W)	Output Voltage (Vdc)	Output Current Range (A)	Typical Efficiency	Typical PF	Typical THD
V6E-350B036	350	36	0~9.80	93%	0.98	10%

Notes:

1. All performance parameters are measured at 25°C ambient temperature, 230Vac input, full load conditions, except for those specified;
2. The drivers are not allowed to work in over-load condition, otherwise warranty will expire.

INPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes			
Input Voltage	176Vac	200-240Vac	264Vac				
Input Frequency	47Hz	50/60	63Hz				
Leakage Current	-	-	0.70mA	240Vac/60Hz			
Input AC Current	-	-	2.5A	200-240Vac & full load			
Inrush Current	-	-	5.5 A ² S	Cold start, 10%I _{peak} , 230Vac & full load			
Power Factor	0.96	0.98	-	220-240Vac , 50-60Hz&full load			
	0.95	0.97	-	220-240Vac , 50-60Hz& 75% load			
	0.90	0.93	-	220-240Vac , 50-60Hz& 50% load			
THD	-	10%	15%	220-240Vac,50-60Hz, 80%~100% load			
	-	15%	20%	220-240Vac,50-60Hz, 50%~80% load			
Max. No. of PSUs on CIRCUIT BREAKER	B10	1	B16	1	B25	2	230Vac
	C10	1	C16	2	C25	4	

OUTPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Output Voltage Tolerance	-2%	-	+2%	Full load
Total Output Voltage Ripple(pk-pk)	-2%		+2%	Full load, Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor.
Outputovershoot	-5%	-	+5%	When the power is on
Line Regulation	-0.5%	-	+0.5%	25°C±10°C ambient temperature, input voltage changes from 200Vac to 240Vac.
Load Regulation	-2%	-	+2%	25°C±10°C ambient temperature, 230Vacinput, load changes from50% to 100%.
Turn-on Delay Time	-	-	0.5S	230Vac,100% load

GENERAL SPECIFICATIONS

Parameter		Min.	Typ.	Max.	Notes
Efficiency@230Vac		92%	93.5%	-	40%~100% load
Dielectric Strength	Input-Output	-	3750Vac	-	5mA/60S
	Input-PE	-	1875Vac	-	
	Output-PE	-	500Vac	-	
Grounding Resistance		-	-	0.1Ω	25°C ± 10°C Ambient Temperature, pass 25A Current, 60s.
Insulation Resistance		10MΩ	-	-	Input-Output, Input-PE, Output-PE, 500Vdc/60S/25°C/70%RH
MTBF		-	200Khrs	-	25°C ± 10°C ambient temperature · 230Vac · 80% load condition (MIL-HDBK-217/SR-332)
Lifetime		-	50000Hours	-	230Vac & 100% load, 75°C case temperature, refer to lifetime VS Tc curve for details
Ambient Temperature		-40°C		+55°C	
Operating Case Temperature for Safety Tc _s		-40°C	-	+90°C	
Operating Case Temperature for Warranty Tc _w		-40°C	-	+75°C	5 years warranty case temperature Humidity: 10% to 100% RH
Storage Temperature		-40°C	-	+90°C	Humidity: 10% to 100% RH
Dimensions (L*W*H)mm		L224.5*W96.9*H41.8			
Net Weight		1700±100g/PCS			
Package		L610*W370*H160mm; 10PCS/Ctn.; Gross Weight: 18.8kg			

SAFTY STANDARDS

Safety Category	Country / Territory	Standards	Approved
CCC	China	GB19510.1, GB19510.14	√
CE	Europe	EN61347-1, EN61347-2-13	√
		EN62493	√
		EN62384	
CB	CB Countries	IEC61347-1, IEC61347-2-13	
BIS	India	IS 15885(PART 2/SEC 13)	
UL	USA	UL 8750	
CUL	Canada	CSA C22.2 No.250.13	
KC	South Korea	K61347-1, K61347-2-13	
PSE	Japan	J61347-1, J61347-2-13	
SAA	Australia	AS/NZS IEC 61347.2.13	
		AS/NZS 61347.1	


EMC COMPLIANCE

EMC Category	Country / Territory	Standards	Approved
CCC	China	GB/T 17743, GB 17625.1	√
CE	Europe	EN 55015	√
		EN 61000-3-2, EN 61000-3-3	√
		EN61000-4-2,3,4,5,6,11	√
		EN 61547	√
KC	South Korea	K61547	
		K00015	
PSE	Japan	J55015	
FCC	USA	FCC part 15	

NOTE:


This LED driver meets the EMI specifications above, but as a component of a luminaire, end customer need to identify the EMI performance of a luminaire including LED driver, other devices connected to the driver and on the luminaire itself.

INRUSH CURRENT WAVEFORM

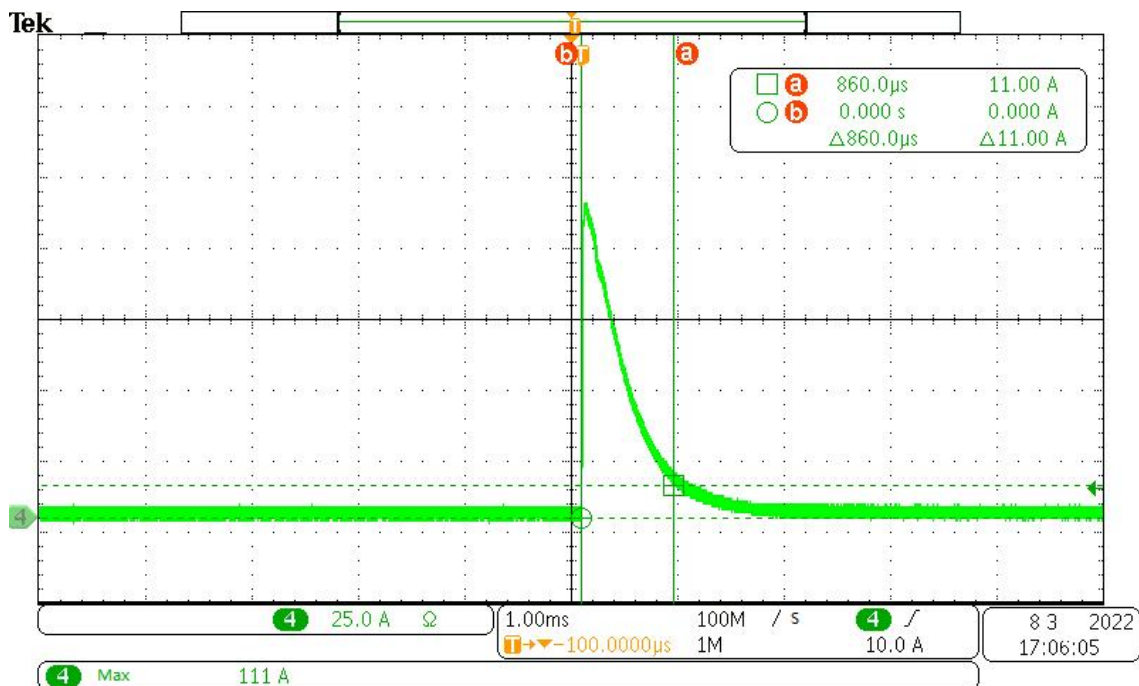


DERATING CURVE


Derating Curve

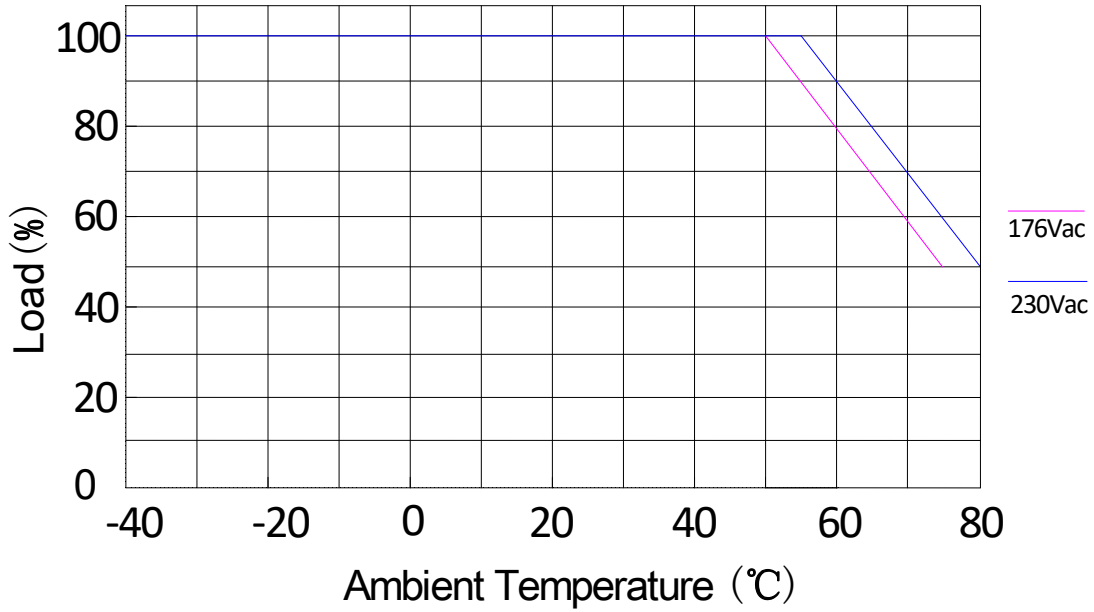


OUTPUT POWER VS INPUT VOLTAGE CURVE

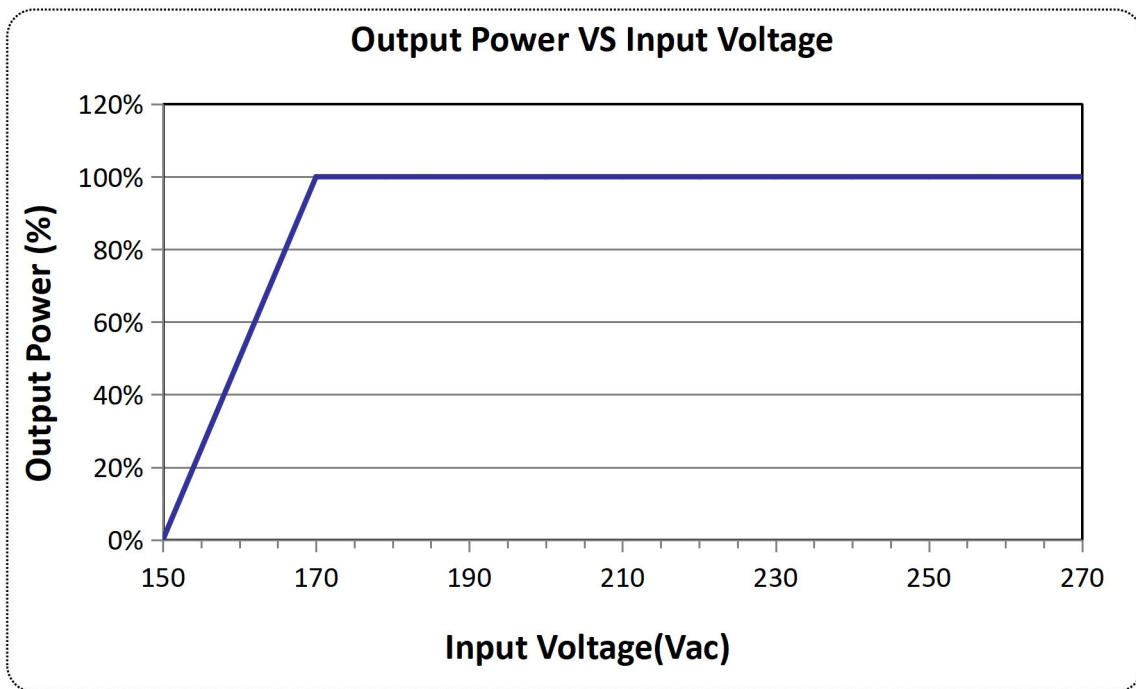


LIFETIME VS CASE TEMPERATURE

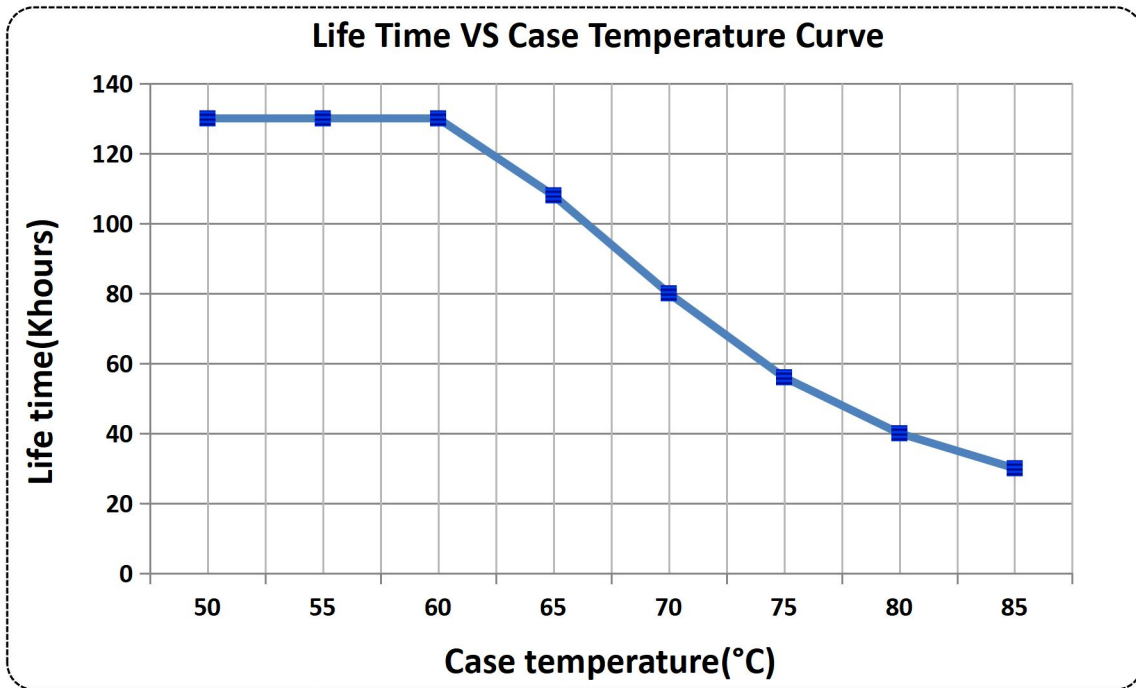


EFFICIENCY VS LOAD

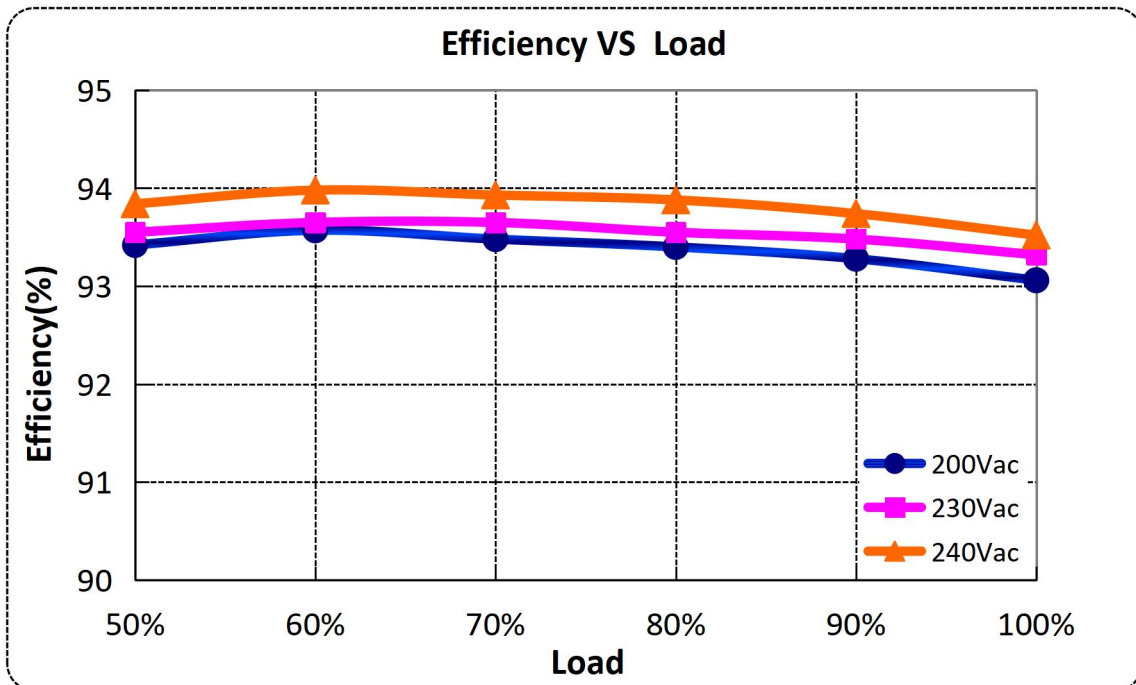

POWER FACTOR VS LOAD

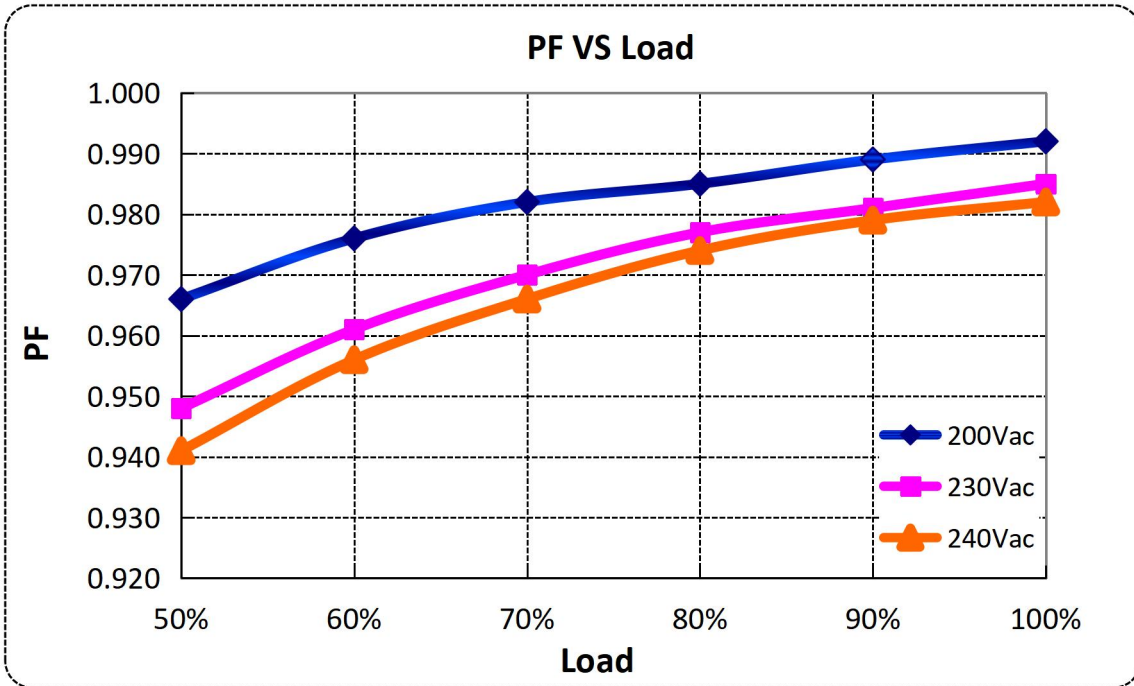


TOTAL HARMONIC DISTORTION

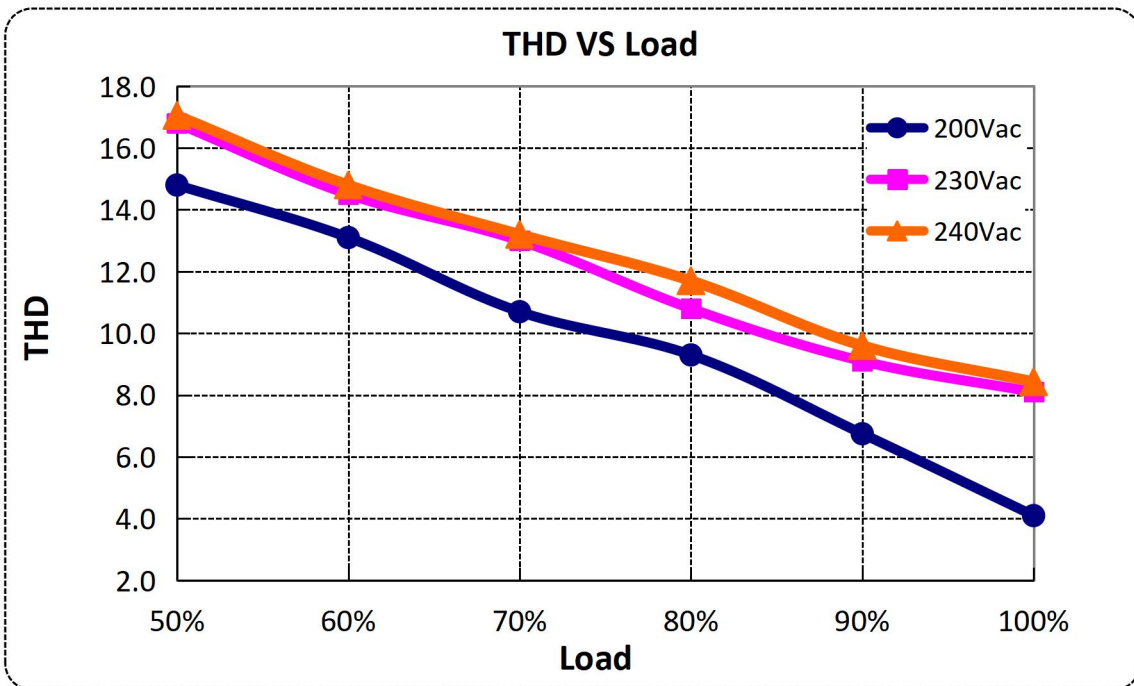

PROTECTIONS

Parameter	Min.	Typ.	Max.	Notes
Input under voltage protection	156Vac /50Hz	-	176Vac /50Hz	Turn off the output or hiccup when the input voltage falls below protection voltage.
Over temperature protection	Output drop current. Returning to normal after over temperature is removed.			
Short circuit protection	Hiccup mode. The output shall return to normal when the fault condition is removed.			
Over current protection	Hiccup mode. The output shall return to normal when the fault condition is removed.			
Over voltage protection	Turn off the output voltage, when the fault is removed, restart and resume.			

MECHANICAL OUTLINE

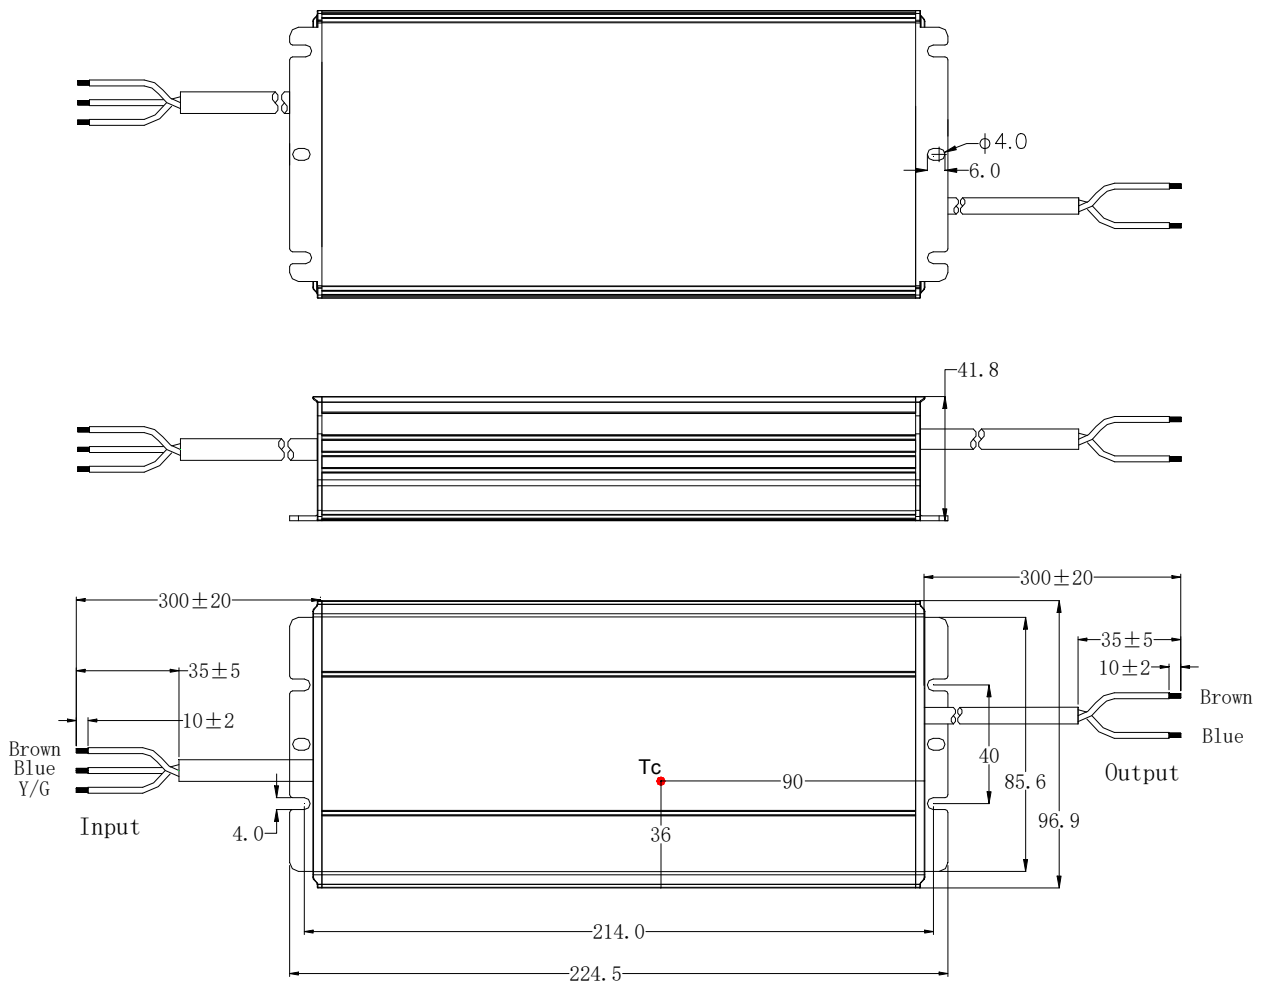

Wire	Specification	Note
Input	CCC+VDE 3*1.0mm ² OD: 7.15mm L=300±20mm	CCC/CE
Output	CCC+VDE 2X1.5 mm ² OD: 9.6mm L=300±20mm	CCC/CE

LABEL

44.50 mm

200.00 mm

INPUT

L (BROWN 棕)

G (Y/G 黄/绿)

N (BLUE 蓝)

MOSO[®] V6E-350B036

LED DRIVER
LED 控制装置 (恒压恒流驱动装置)

INPUT (输入)	200-240V~50/60Hz, 2.5A Max.
OUTPUT (输出)	Output current: 9.8A Max. Urated 36V~ , Prated: 350W Max.
t _c : 90°C	t _a : 55°C Input: 200-240V~

中国制造
 仅适用LED模块
 MADE IN CHINA
 For LED module only

深圳茂硕电子科技有限公司
 SHENZHEN MOSO ELECTRONIC'S TECHNOLOGY CO., LTD
 No.1061, Songbai Road, Xili Town, Nanshan District,
 Shenzhen, CHINA

CCC

CE

SELV

IP67

RoHS

OUTPUT

(BROWN 棕) Vo +

(BLUE 蓝) Vo -

ROHS

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU.