



Product Features

- Universal input voltage / Full range: 90~305Vac;
- Constant power design, output current programming adjustable;
- (M types) off-line programmable, (V types) output current adjustable by built-in potentiometer;
- 3-in-1 dimmable: 0~10Vdc, PWM, Positive and negative logic, Timer dimming, Dim-to-off;
- (M types)Constant lumen output ,daily log;
- Self adapting-midnight dimming;
- Output and Dimming Signal Isolating;
- Surge protection: 6KV line-line, 10KV line-earth;
- Protections: SCP, OVP, OTP;
- IP67 design for indoor and outdoor applications;
- Suitable for dry / damp / wet locations;
- 5 years warranty.

Application:

- Suitable for LED roadway lighting, Industrial lighting, landscape lighting, etc.

DESCRIPTION

The X6-240W series is a 240W outdoor off-line programmable LED driver that operates in constant current with high PF value and universal input voltage range of 90~305Vac. Monitored off-line by dimming cable connected with an USB kit programming device, the fully programmed drivers offer all dimming, dim-to-off, constant lumen output options and a wide range of output current in a single driver, providing maximum flexibility with customized operating settings and intelligent control options for lighting manufacturers, as one driver can be programmed for many different luminaire designs. X6 provides built-in timer dimming schedules that further increase the energy savings and CO₂ reductions achieved with LED lighting. It also helps customers to improve logistics and inventory management. The compact metal case and high efficiency enables the driver to operate with high reliability and extend product life. Overall protection is provided against lightning surge, output over voltage, short circuit, and over temperature, to ensure low failure rate.

MODELS

| Model Number [1] | Max Output Power (W) | Output Voltage Range (Vdc) | Full Power Output Voltage Range(Vdc) | Full Power Current Adjustable Range (A) [2] | Default Output Current Setting(A) | Typical Efficiency [3] | Power Factor |
|------------------|----------------------|----------------------------|--------------------------------------|---|-----------------------------------|------------------------|--------------|
| | | | | | | | 230Vac |
| X6-240Y041 | 240 | 20-41 | 32-41 | 5.86-7.50 | 6.70 | 92% | 0.97 |

Notes:


[1]. Y can be M or V. Y=M means dimmable and off-line programmable, The adjustable lout range: 10%-100% I_{max};

Y=V means non-dimmable and output current adjusted by built-in potentiometer.

[2]. Output current adjustable range with constant power at max output power;

[3]. All specifications are measured at 25°C ambient temperature, input voltage 230Vac, and the typical value tested by full load, if no specific note.

OPERATING AREA I-V

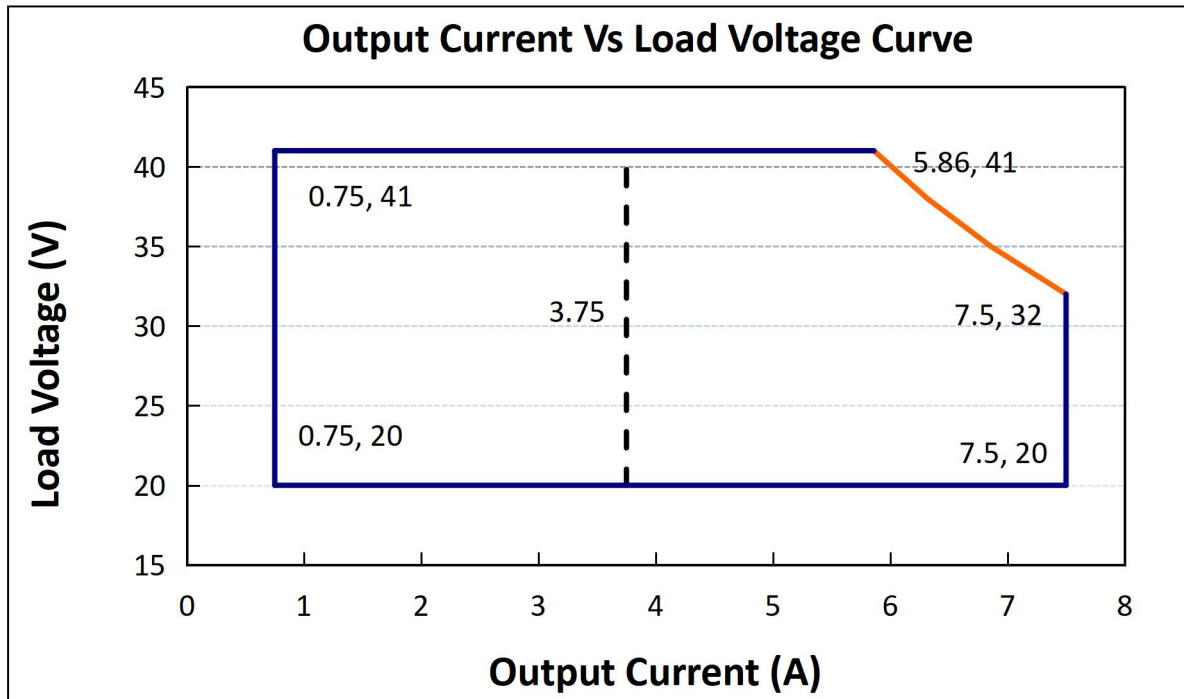

Notes: The drivers are not allowed to work in over-load condition, otherwise warranty will expire.

Y=V is suitable for the right area of the dotted line; Y=M is suitable for the solid line contain area.

INPUT SPECIFICATIONS

| Parameter | Min. | Typ. | Max. | Notes | | | |
|-------------------------------------|-------|------------|--------|------------------------------------|-----|---|--------|
| Input Voltage | 90Vac | 100-277Vac | 305Vac | | | | |
| Input Frequency | 47Hz | 50/60 | 63Hz | | | | |
| Leakage Current | - | - | 0.70mA | 277Vac/60Hz | | | |
| Input AC Current | - | - | 3.3A | 100-277Vac & full load | | | |
| Inrush Current | - | - | 75A | 230Vac & full load | | | |
| Standby Power Consumption | | | 2W | | | | |
| Power Factor | 0.97 | 0.99 | - | 120Vac, 50-60Hz, full load | | | |
| | 0.95 | 0.97 | | 230Vac, 50-60Hz, full load | | | |
| | 0.92 | 0.95 | | 277Vac, 50-60Hz, full load | | | |
| THD | - | 5% | 10% | 100-240Vac, 50-60Hz, 70%-100% load | | | |
| | - | - | 15% | 277Vac, 50-60Hz, 70%-100% load | | | |
| Max. NO. of PSUs on CIRCUIT BREAKER | B10 | 1 | B16 | 2 | B25 | 2 | 230Vac |
| | C10 | 2 | C16 | 3 | C25 | 4 | |

OUTPUT SPECIFICATIONS

| Parameter | Min. | Typ. | Max. | Notes |
|---|---------|------|--------|---|
| Output Current Tolerance | -5%Iset | - | 5%Iset | |
| Output Current Setting Range (A) X6-240Y041 | 3.75A | - | 7.50A | The 'M type' adjustable lout range: 10%-100% I _{max} , |
| Output Current Setting Range with Constant Power X6-240Y041 | 5.86A | - | 7.50A | |
| Total Output Current Ripple(pk-pk) | - | 5% | 10% | 20MHz BW, full load& LED load, the ripple would be tiny different under different LED load. |
| Startup Overshoot Current | - | - | 10% | 100~277Vac & 100% Load, load is LED |
| No Load Output Voltage(V) X6-240Y041 | - | - | 50V | |
| Line Regulation | -1% | - | 1% | 25°C±10°C ambient temperature, input voltage changes from 100Vac to 277Vac. |
| Load Regulation | -3% | - | 3% | 25°C±10°C ambient temperature, Input Voltage 230Vac, load changes from 60% to 100%. |
| Turn-on Delay Time | - | 1S | 2S | 120Vac, 100% load |
| | - | - | 0.5S | 230Vac, 100% load |

GENERAL SPECIFICATIONS

| Parameter | Min. | Typ. | Max. | Notes |
|--|----------------|----------------|---------|--|
| Efficiency @120Vac I _o =5.86A I _o =7.50A | 88.0% 88.0% | 90.0% 90.0% | | Measured at full load and 25°C ambient temperature |
| Efficiency @230Vac I _o =5.86A I _o =7.50A | 90.0% 90.0% | 92.0% 92.0% | - | Measured at full load and 25°C ambient temperature |
| Efficiency @277Vac I _o =5.86A I _o =7.50A | 90.5% 90.5% | 92.5% 92.5% | | Measured at full load and 25°C ambient temperature |
| Dielectric Strength | Input-Output | - | 3750Vac | Max 5mA/60S |
| | Input-PE | - | 1600Vac | |
| | Output-PE | - | 1600Vac | |
| Grounding Resistance | - | - | 0.1Ω | 25A/60S, under 25°C±10°C ambient temperature |
| Insulation Resistance | 10MΩ | - | - | Input-Output, Input-PE, Output-PE, 500Vdc/60S/25°C/70%RH |
| MTBF | - | 200000Hrs | - | 25°C±10°C ambient temperature, 230Vac, 80% load (MIL-HDBK-217F) |
| Lifetime | - | 50000Hrs | - | 230Vac&100% load, 75°C case temperature, refer to lifetime curve for details |
| Ambient Temperature | -40°C | | +60°C | Reference derating curve |
| Operating Case Temperature for Safety T _{c_s} | -40°C | - | +90°C | |
| Operating Case Temperature for | -40°C | - | +75°C | 5 years warranty case temperature |

| | | | | |
|----------------------|--|---|-------|-------------------------|
| Warranty Tc_s | | | | Humidity: 10% to 95% RH |
| Storage Temperature | -40°C | - | +85°C | Humidity: 5% to 100% RH |
| Dimensions (LxWxH)mm | L208.6*W68*H39 | | | |
| Net Weight | 1050±100g/PCS | | | |
| Package | L502mm*W372mm*H222mm; 15PCS/Ctn, Gross Weight: 16.2Kg | | | |

DIMMING

| Parameter | | Min. | Typ. | Max. | Notes |
|--|------------|---------|-------|----------|--|
| 0~10V Absolute Maximum Voltage on the Vdim (+) Pin | | - | 10V | - | |
| 0~10V Source Current on Vdim(+)Pin | | - | 200uA | 400uA | |
| Dimming Output Range | X6-240M041 | 10%Imax | - | 100%Imax | I _{max} =7.50A |
| | X6-240M041 | 0.75A | - | 7.50A | |
| Recommended Dimming Range for 0-10V | | 0V | - | 10V | Default 0-10V/ PWM Dimming(0-10V,0-9V,0-5V,0-3.3V Positive and Reverse Logic can be customized as request) |
| PWM_in High Level | | 9.7V | - | 10.3V | |
| PWM_in Low Level | | 0V | - | 0.3V | |
| PWM_in Frequency Range | | 300Hz | - | 2KHz | |
| PWM_in Duty Cycle | | 1% | - | 99% | |

SAFETY STANDARDS

| Safety Category | Country / Territory | Standards | Approved |
|-----------------|---------------------|--|----------|
| CCC | China | GB19510.1, GB19510.14 | √ |
| CE | Europe | EN61347-1, EN61347-2-13 | √ |
| | | EN62493 | √ |
| ENEC | | EN62384 | √ |
| CB | CB Countries | IEC61347-1, IEC61347-2-13 | √ |
| BIS | India | IS 15885(PART 2/SEC 13) | √ |
| UL | USA | UL 8750 | √ |
| CUL | Canada | CSA C22.2 No.250.13 | √ |
| KC | South Korea | K61347-1, K61347-2-13 | |
| PSE | Japan | J61347-1, J61347-2-13 | |
| SAA | Australia | AS/NZS IEC 61347.2.13 | √ |
| | | AS/NZS 61347.1 | √ |
| EAC | Russia | ГОСТ Р МЭК 61347-1-2011 ГОСТ IEC 61347-2-13-2013 ГОСТ IEC 62493-2014 СТБ EH 55015-2006 ГОСТ IEC 61547-2013 ГОСТ 30804.3.2-2013 (IEC 61000-3-2:2009) ГОСТ 30804.3.3-2013 (IEC 61000-3-3:2008) | √ |

Insulation

| | | | | |
|-------------|-------------|--------|------------|-------|
| Insulation | Input/Mains | DIMING | LED Output | Case |
| Input/Mains | / | Double | Double | Basic |
| DIMING | Double | / | Basic | Basic |
| LED Output | Double | Basic | / | Basic |
| Case | Basic | Basic | Basic | / |


EMC COMPLIANCE

| EMC Category | Country / Territory | Standards | Approved |
|--------------|---------------------|----------------------------|----------|
| CCC | China | GB/T 17743, GB 17625.1 | √ |
| CE | Europe | EN 55015 | √ |
| | | EN 61000-3-2, EN 61000-3-3 | √ |
| | | EN61000-4-2,3,4,5,6,11 | √ |
| | | EN 61547 | √ |
| KC | South Korea | K61547 | |
| | | K00015 | |
| PSE | Japan | J55015 | |
| FCC | USA | FCC part 15 | √ |


NOTE:

This LED driver meets the EMI specifications above, but as a component of a luminaire, the end customer need to identify the EMI performance of a luminaire including the LED driver, other devices connected to the driver, and on the luminaire itself.


INRUSH CURRENT WAVEFORM

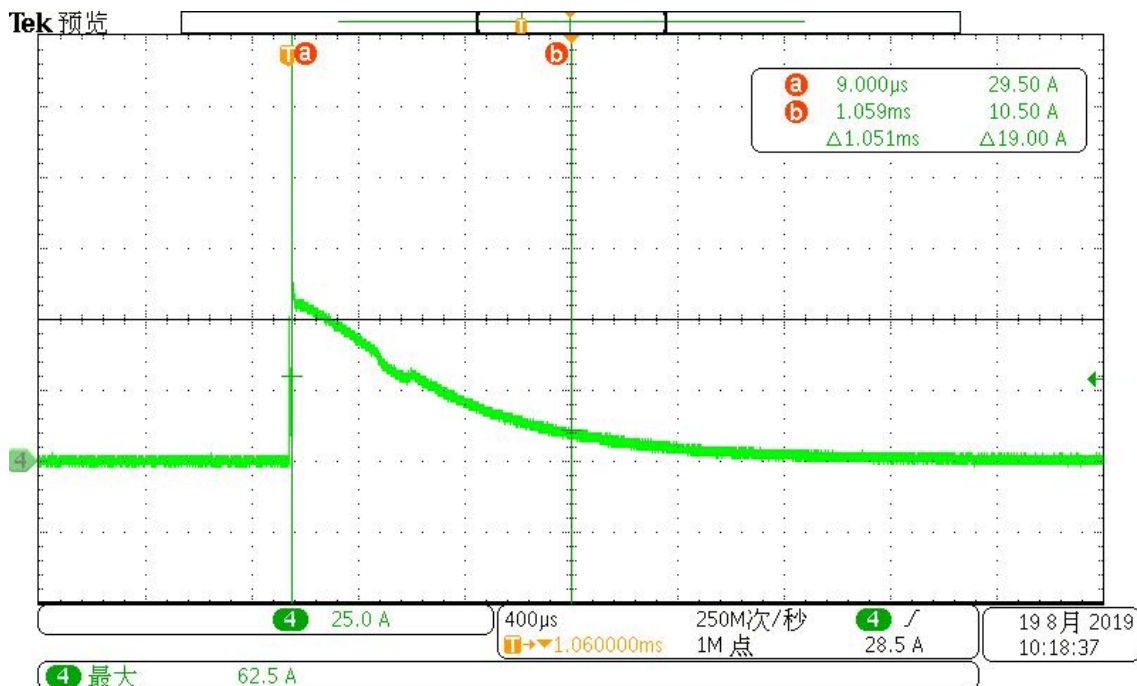


DERATING CURVE

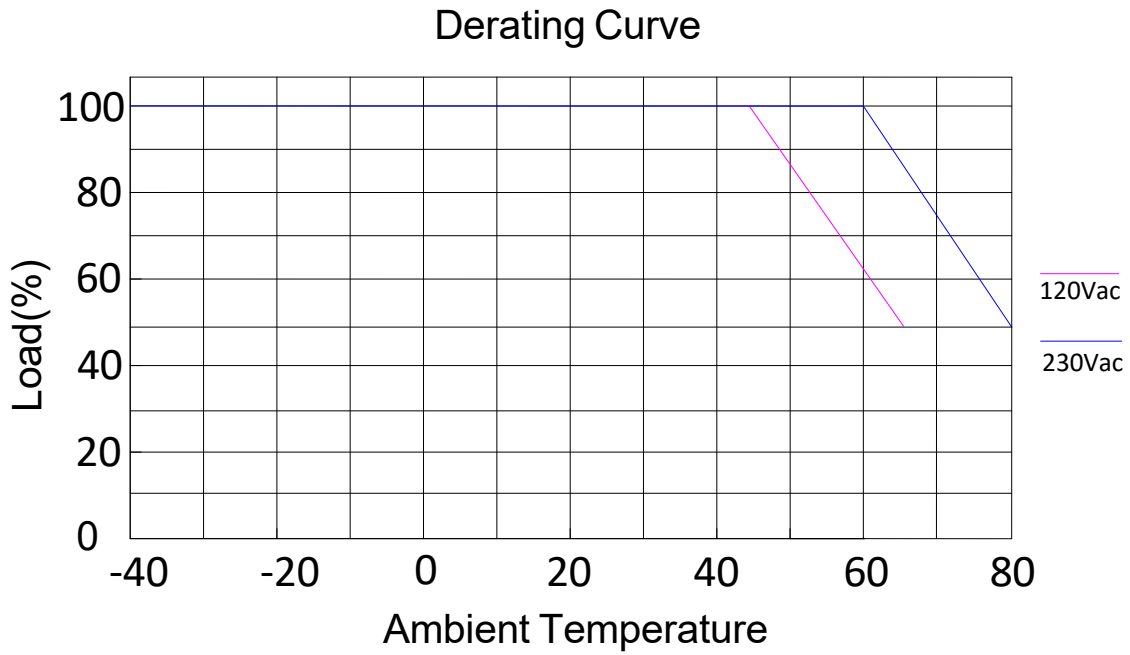

OUTPUT POWER VS INPUT VOLTAGE

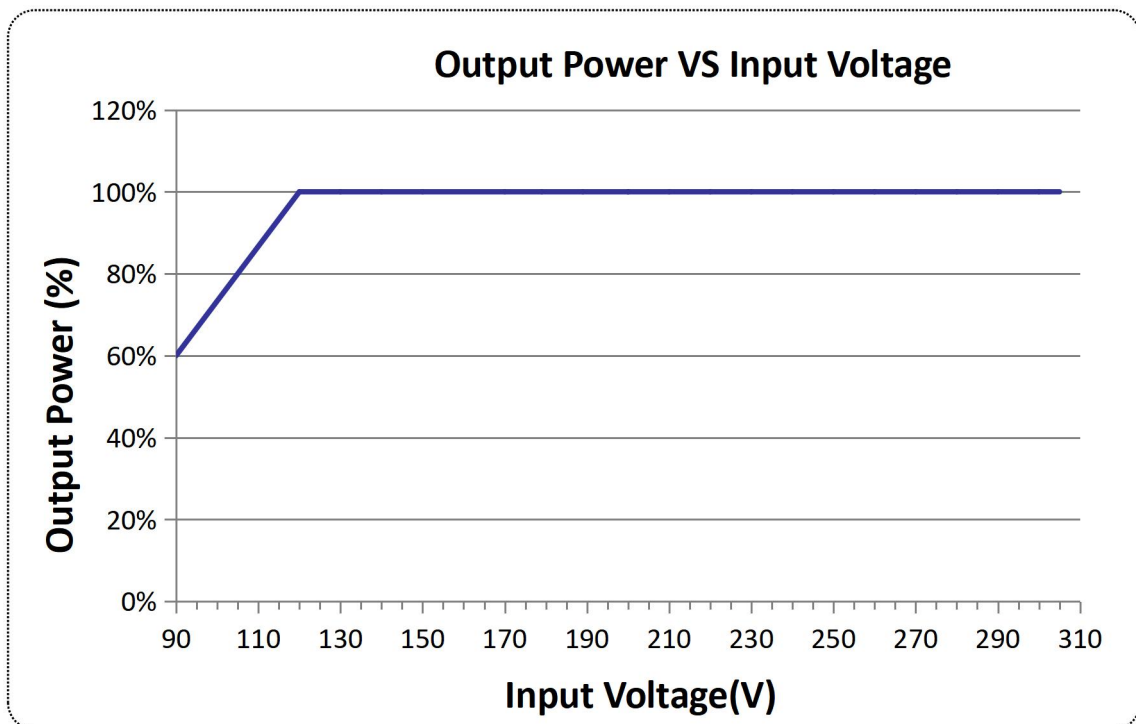


LIFETIME VS CASE TEMPERATURE

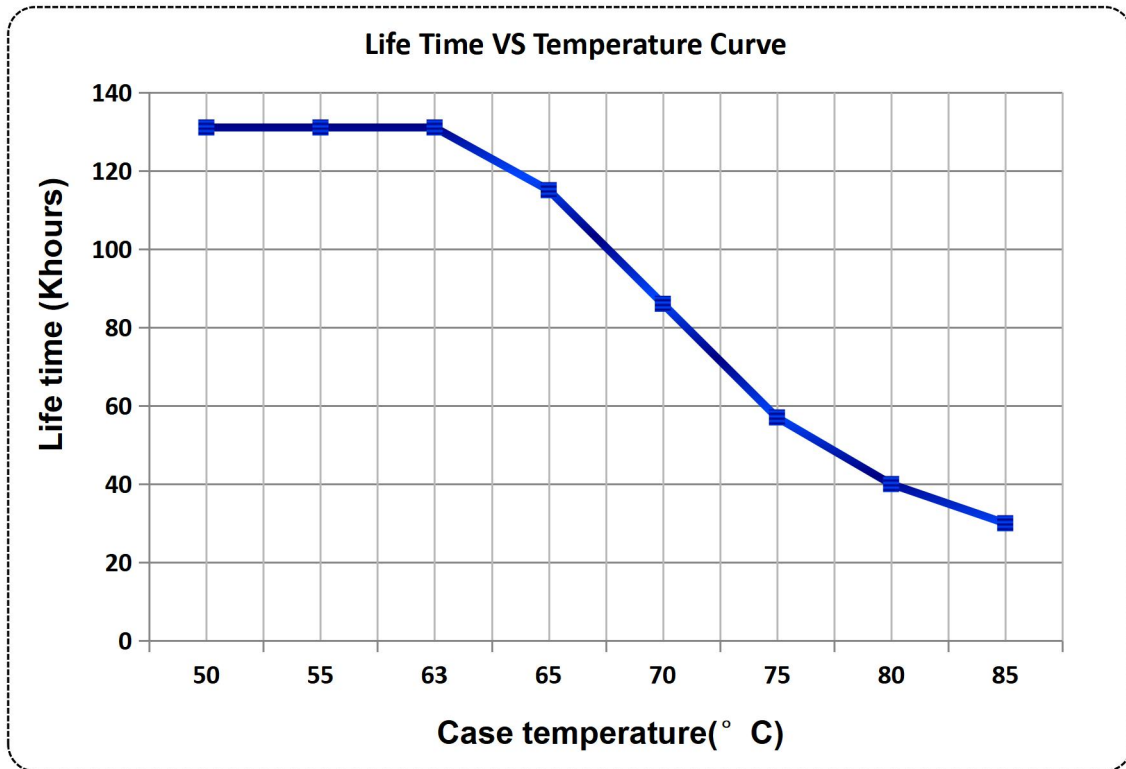


EFFICIENCY VS LOAD


X6-240Y041 (I_o=5.86A)

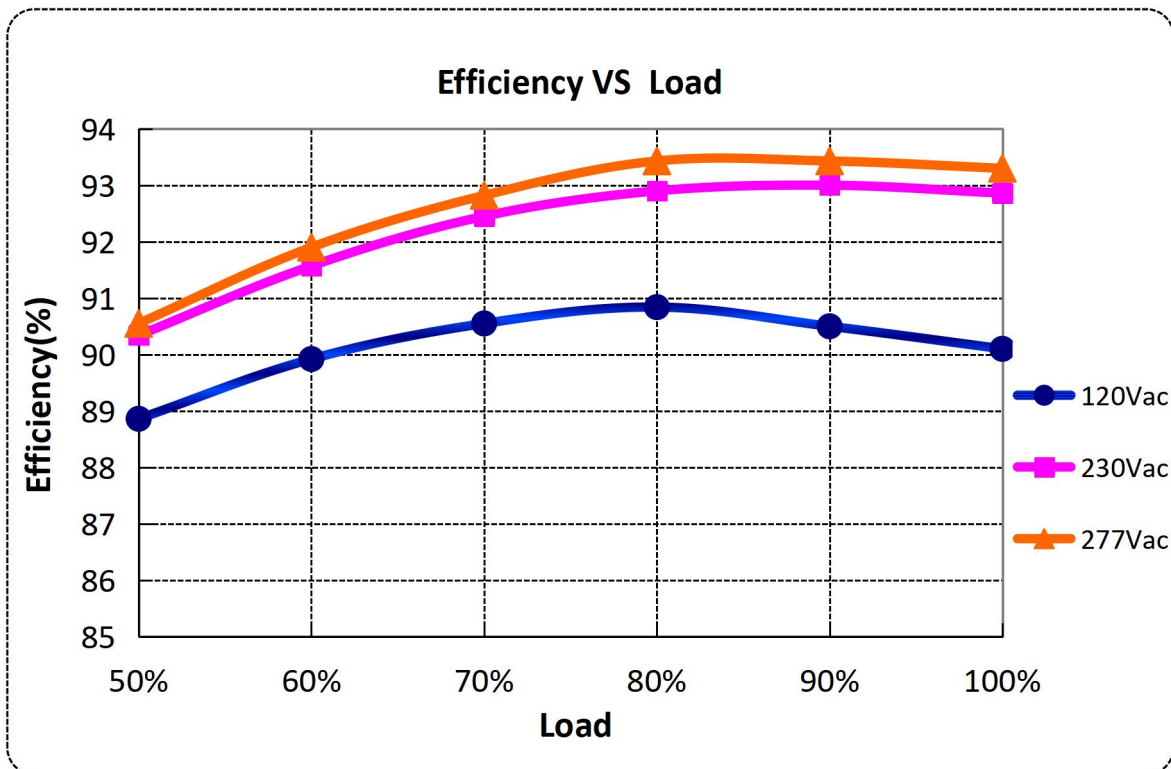


X6-240Y041 (I_o=7.50A)

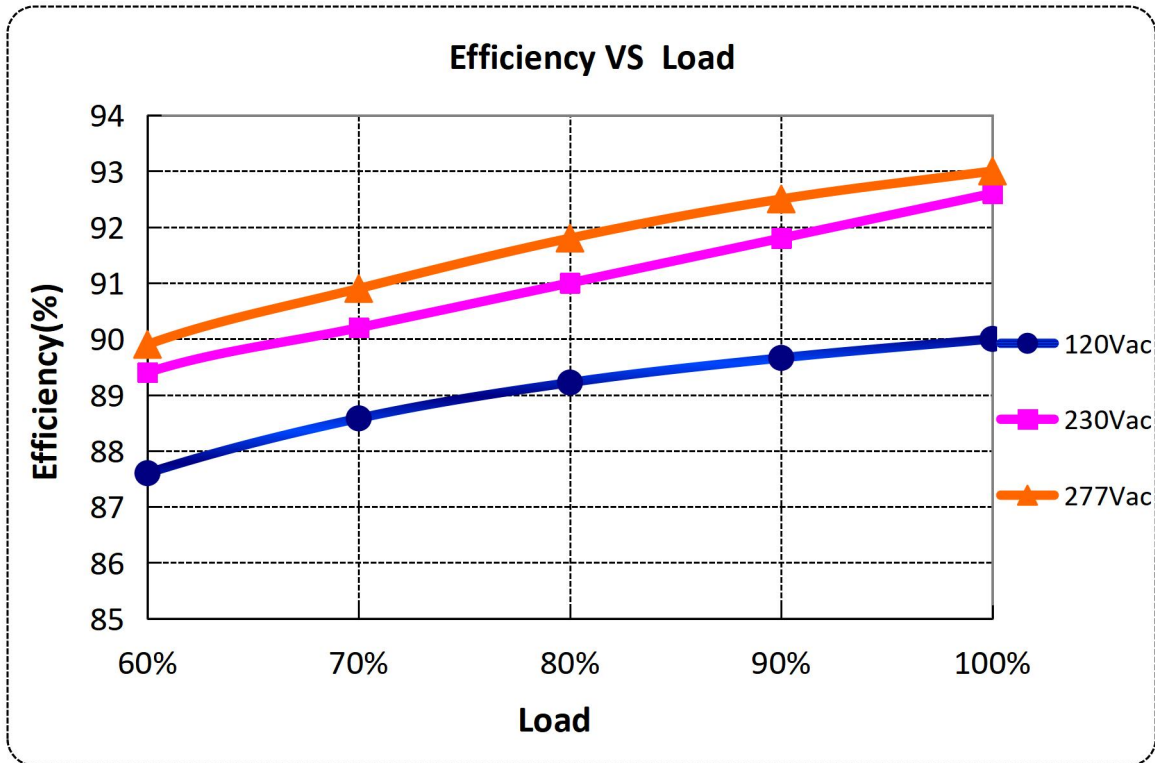

POWER FACTOR VS LOAD

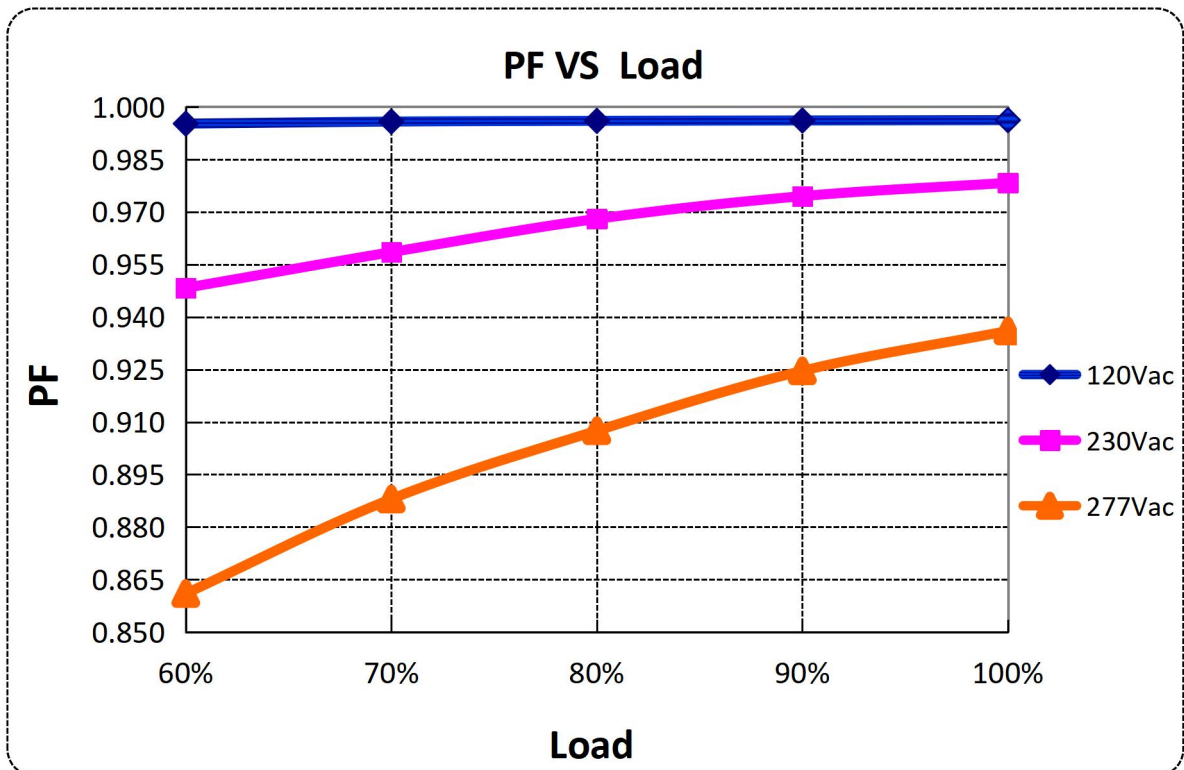


TOTAL HARMONIC DISTORTION

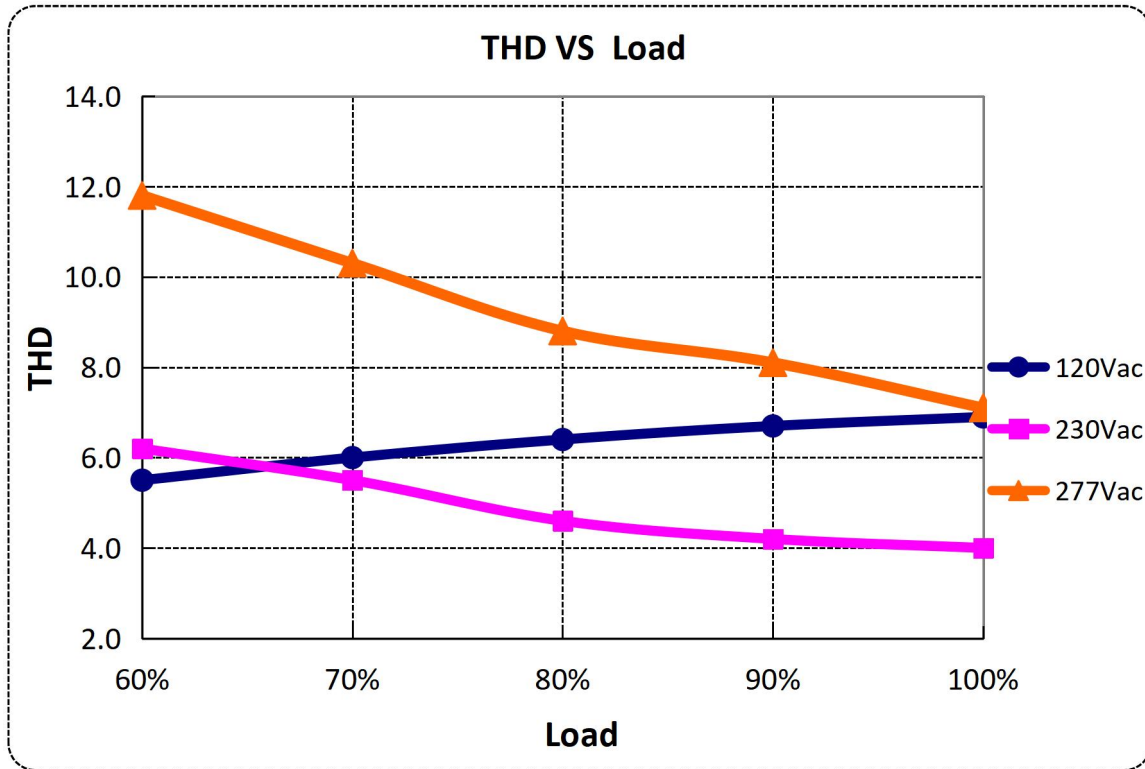

PROTECTIONS

| Parameter | Notes |
|-----------------------------|---|
| Over Temperature Protection | Decreases output current, returning to normal after over temperature is removed. |
| Short Circuit Protection | Constant current and auto recovery. No damage will occur when any output is short-circuited. The output shall return to normal when the fault condition is removed. |
| Over Voltage Protection | Run into protection mode when output voltage exceeds limit, and return to normal when the fault is eliminated and restart the power supply. |


0-10V/PWM DIMMING

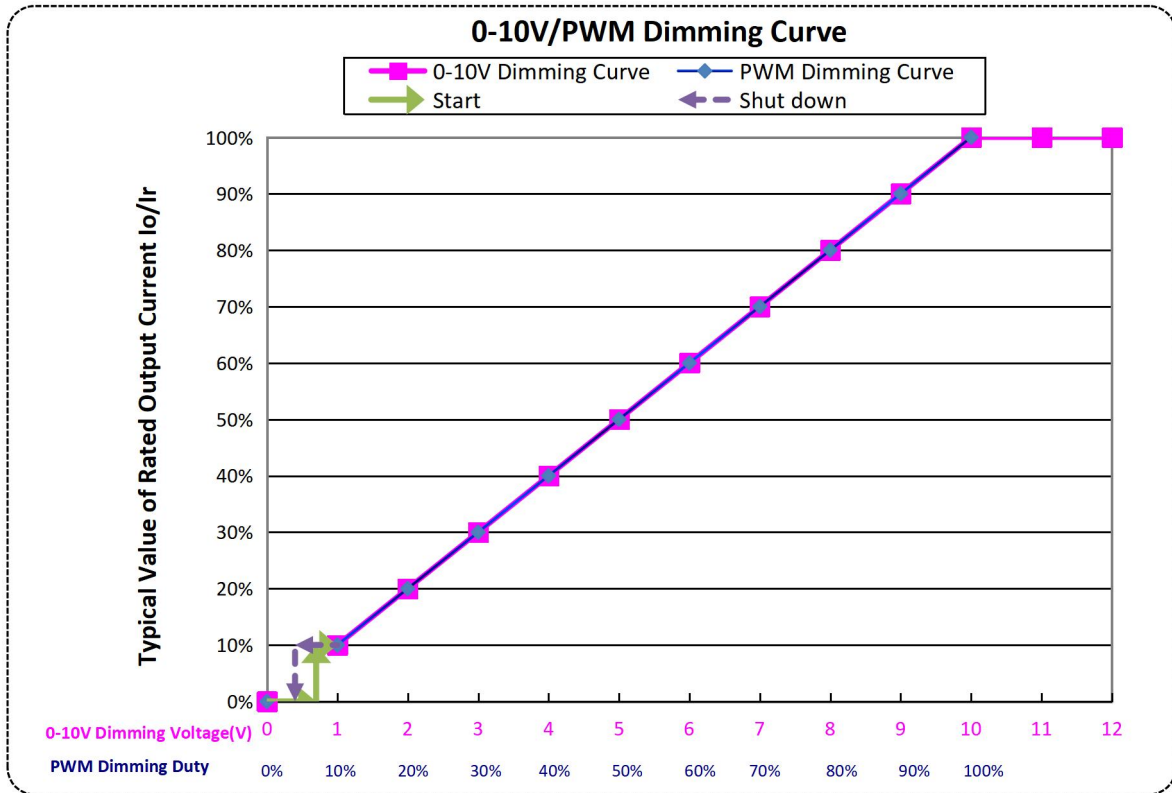





Note: The dim to off model is realized by decreasing the output voltage, the power supply still has a residual voltage when dim to off, so the start up voltage of the lamp should be higher than residual voltage.

MECHANICAL OUTLINE

X6-240M041

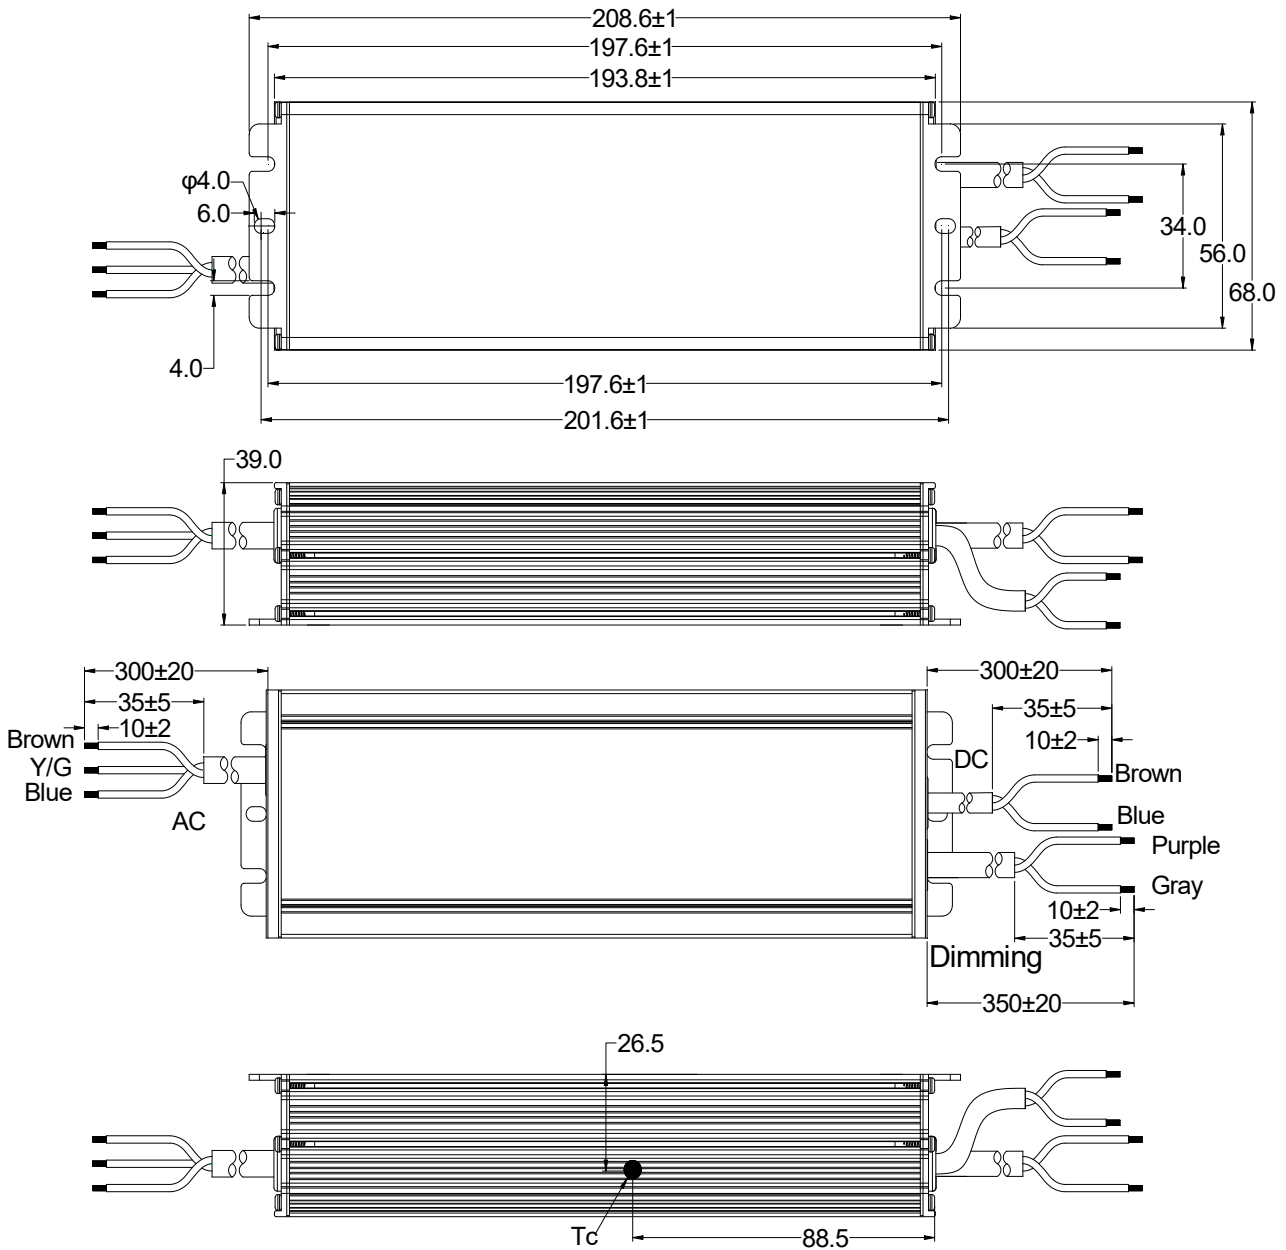

X6-240V041

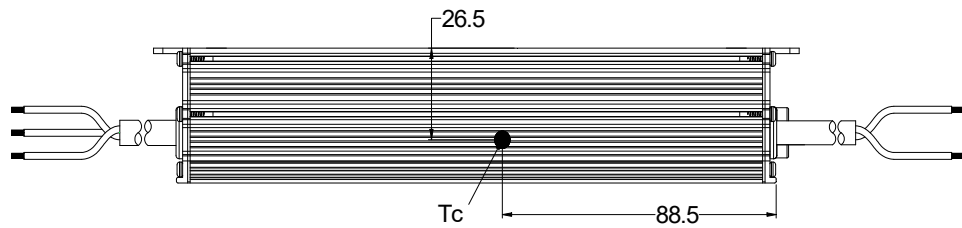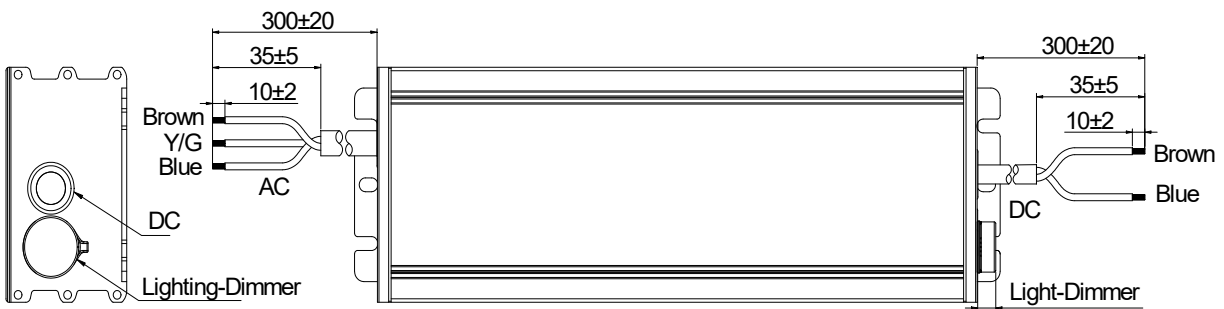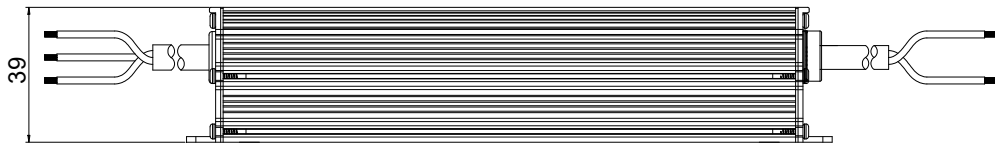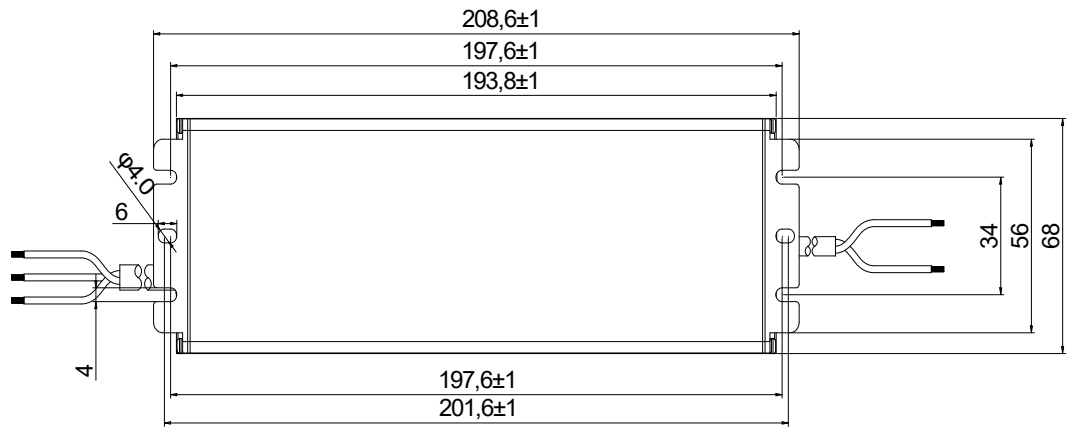

| Wire | Specification | Note |
|---------|------------------------------|-----------|
| Input | SJOW 17AWG *3C L=300±20mm | CCC/CE/UL |
| Output | SJOW 17AWG *2C L=300±20mm | CCC/CE/UL |
| Dimming | UL 2733 22AWG *2C L=350±20mm | Y=M |

LABEL

X6-240M041

45.50 mm

183.00 mm

| | | | | | | | | | |
|--------------------------------------|--|---|--|----------------|---|-----------------------|--|--|---|
| INPUT | X6-240M041 LED DRIVER LED 控制装置(恒流型) | | OUTPUT | | | | | | |
| L (BROWN 棕) | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%; text-align: center;">INPUT (输入)</td> <td>100-240V~50/60Hz, 3.3A Max. PF:0.95 277V~ 50/60Hz, 1.0A Max (277V~ for North America only)</td> </tr> <tr> <td style="text-align: center;">OUTPUT (输出)</td> <td>20-41V--- 0.75-7.5A Max.(最大电压): 50V--- Max.Power(最大功率):240W</td> </tr> <tr> <td style="text-align: center;">t_c: 90°C</td> <td>t_a: 50°C Input:100-200V~ t_a: 60°C Input:200-240V~,277V~</td> </tr> </table> | INPUT (输入) | 100-240V~50/60Hz, 3.3A Max. PF:0.95 277V~ 50/60Hz, 1.0A Max (277V~ for North America only) | OUTPUT (输出) | 20-41V--- 0.75-7.5A Max.(最大电压): 50V--- Max.Power(最大功率):240W | t _c : 90°C | t _a : 50°C Input:100-200V~ t _a : 60°C Input:200-240V~,277V~ | | (BROWN 棕) Vo + (BLUE 蓝) Vo - (PURPLE 紫) DIM + (GRAY 灰) DIM - |
| INPUT (输入) | 100-240V~50/60Hz, 3.3A Max. PF:0.95 277V~ 50/60Hz, 1.0A Max (277V~ for North America only) | | | | | | | | |
| OUTPUT (输出) | 20-41V--- 0.75-7.5A Max.(最大电压): 50V--- Max.Power(最大功率):240W | | | | | | | | |
| t _c : 90°C | t _a : 50°C Input:100-200V~ t _a : 60°C Input:200-240V~,277V~ | | | | | | | | |
| G (Y/G 黄/绿) | | | | | | | | | |
| N (BLUE 蓝) | | | | | | | | | |
| MADE IN CHINA For LED module only | | Suitable for Dry, Damp and Wet locations SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD No.1061, Songbai Road, Xili Town, Nanshan District, Shenzhen, CHINA | | | | | | | |

X6-240V041

45.50 mm

183.00 mm

| | | | | | | | | | |
|--------------------------------------|--|---|--|----------------|---|-----------------------|--|--|---|
| INPUT | X6-240V041 LED DRIVER LED 控制装置(恒流型) | | OUTPUT | | | | | | |
| L (BROWN 棕) | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%; text-align: center;">INPUT (输入)</td> <td>100-240V~50/60Hz, 3.3A Max. PF:0.95 277V~ 50/60Hz, 1.0A Max (277V~ for North America only)</td> </tr> <tr> <td style="text-align: center;">OUTPUT (输出)</td> <td>20-41V--- 3.75-7.5A Max.(最大电压): 50V--- Max.Power(最大功率):240W</td> </tr> <tr> <td style="text-align: center;">t_c: 90°C</td> <td>t_a: 50°C Input:100-200V~ t_a: 60°C Input:200-240V~,277V~</td> </tr> </table> | INPUT (输入) | 100-240V~50/60Hz, 3.3A Max. PF:0.95 277V~ 50/60Hz, 1.0A Max (277V~ for North America only) | OUTPUT (输出) | 20-41V--- 3.75-7.5A Max.(最大电压): 50V--- Max.Power(最大功率):240W | t _c : 90°C | t _a : 50°C Input:100-200V~ t _a : 60°C Input:200-240V~,277V~ | | (BROWN 棕) Vo + (BLUE 蓝) Vo - Io ADJ (+) |
| INPUT (输入) | 100-240V~50/60Hz, 3.3A Max. PF:0.95 277V~ 50/60Hz, 1.0A Max (277V~ for North America only) | | | | | | | | |
| OUTPUT (输出) | 20-41V--- 3.75-7.5A Max.(最大电压): 50V--- Max.Power(最大功率):240W | | | | | | | | |
| t _c : 90°C | t _a : 50°C Input:100-200V~ t _a : 60°C Input:200-240V~,277V~ | | | | | | | | |
| G (Y/G 黄/绿) | | | | | | | | | |
| N (BLUE 蓝) | | | | | | | | | |
| MADE IN CHINA For LED module only | | Suitable for Dry, Damp and Wet locations SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD No.1061, Songbai Road, Xili Town, Nanshan District, Shenzhen, CHINA | | | | | | | |

